

8300100614
VWA0910CTTRS

EC axial fan - AxiEco

with inlet ring and guard grill

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

sales@fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Item	8300100614	
Motor	E15037-120	
Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	1190
Power consumption	W	3575
Current draw	A	5.2
Max. back pressure	Pa	500
Max. back pressure	in. wg	2.01
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	40

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	54.6	37	09 Power consumption P_{ed}	kW	3.41
02 Measurement category		A		09 Air flow q_v	m³/h	16760
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	382
04 Efficiency grade N		57.6	40	10 Speed (rpm) n	min ⁻¹	1195
05 Variable speed drive		Yes		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.

* Specific ratio = $1 + p_s / 100\,000\text{ Pa}$

LU-221585

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.
The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).



EC axial fan - AxiEco

with inlet ring and guard grill

Technical description

Size	910 mm
Motor size	150
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum, painted gray
Impeller material	PP plastic, ABS ring plastic
Inlet ring material	Sheet steel, galvanized and coated with black plastic (RAL 9005)
Guard grille material	Steel, coated with black plastic (RAL 9005)
Number of blades	5
Airflow direction	V
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP55
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H2
Ambient temperature note	Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings.
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	- Operation and alarm display with LED - External 15-50 VDC input (parameterization) - Alarm relay - Integrated PI controller - Configurable inputs/outputs (I/O) - MODBUS V6.4 - Motor current limitation - PFC, active - RS-485 MODBUS-RTU - Soft start - Voltage output 3.3-24 VDC, Pmax = 800 mW - Control interface with SELV potential safely disconnected from the mains - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection - Vibration sensor
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Terminal box
Motor protection	Electronic motor protection



8300100614
VWA0910CTTRS

EC axial fan - AxiEco

with inlet ring and guard grill

Protection class assignment	I; If a protective earth is connected by the customer This component for installation may have several local protection classes. This information relates to this component's basic design. The final protection class is based on the component's intended installation and connection.
Conformity with standards	EN 61800-5-1; CE; UKCA
Approval	CSA C22.2 No. 77; EAC; UL 1004-7 + 60730-1




8300100614
VWA0910CTTRS

EC axial fan - AxiEco

with inlet ring and guard grill

Product drawing

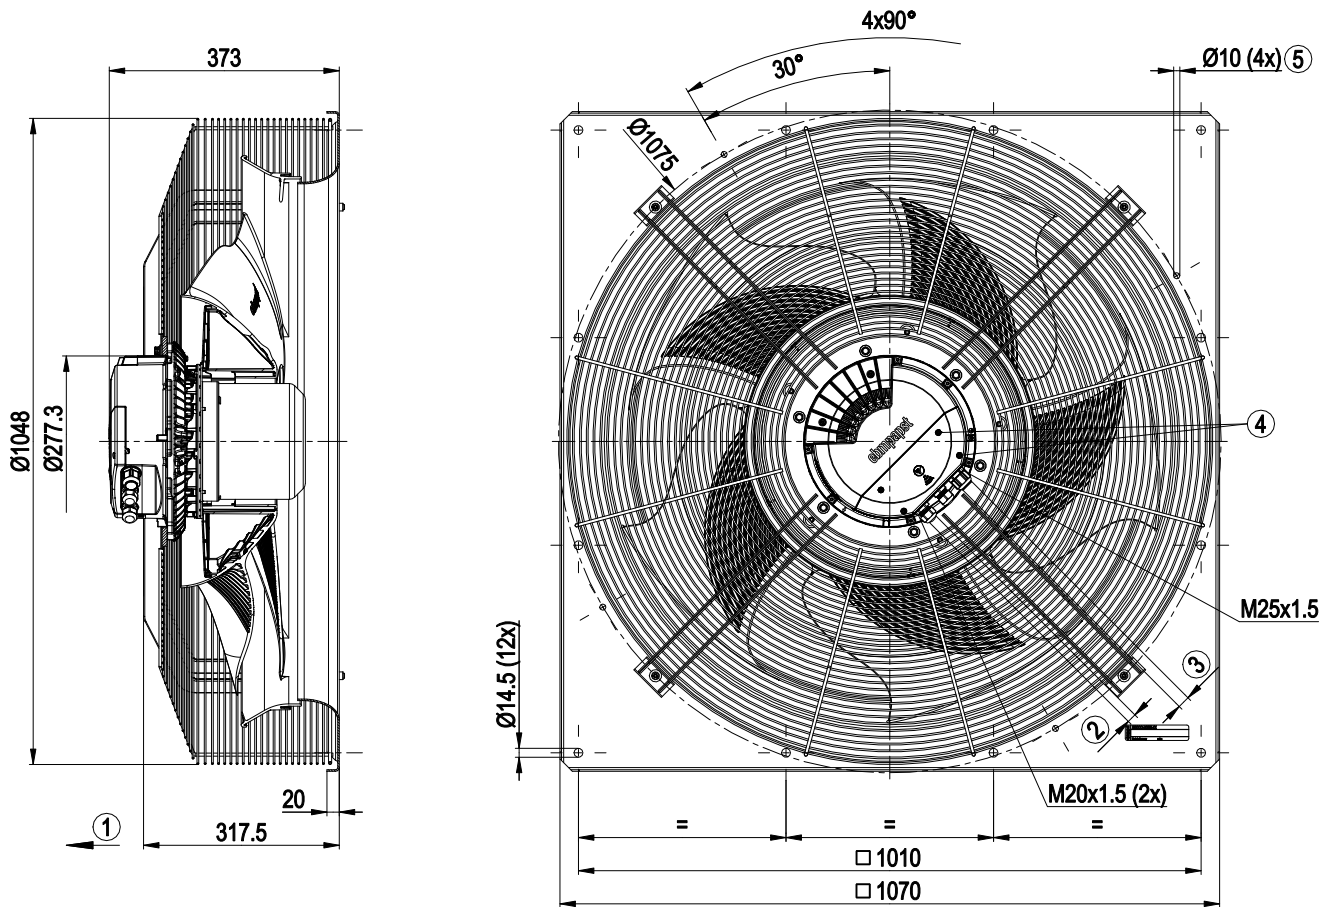


1	Airflow direction "V"
2	Cable diameter min. 4 mm, max. 10 mm, tightening torque 4 ± 0.6 Nm
3	Cable diameter min. 5 mm, max. 14 mm, tightening torque 6 ± 0.9 Nm
	(The tightening torque is designed for PVC cables. If the cable materials are different, the tightening torque may have to be adjusted)
4	Tightening torque 3 ± 0.3 Nm
5	Attachment holes for FlowGrid 91000-2-2957 (not included in scope of delivery)



EC axial fan - AxiEco

with inlet ring and guard grill

Connection diagram

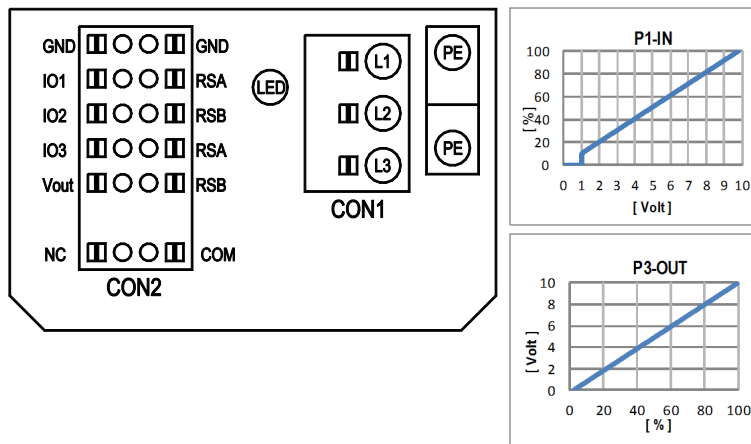

No.	Conn.	Designation	Function/assignment
	CON1	L1, L2, L3	Power supply, phase, see nameplate for voltage range
	PE	PE	Protective earth
	CON2	RSA	RS485 interface for MODBUS, RSA; SELV
	CON2	RSB	RS485 interface for MODBUS, RSB; SELV
	CON2	GND	Reference ground for control interface, SELV
	CON2	IO1	Function parameterizable (see "Optional interface functions" table) Factory setting: Digital input - high active, function: Disable input, SELV - inactive: Pin open or applied voltage < 1.5 VDC - active: applied voltage 3.5-50 VDC Reset function: Triggering of error reset on change of state from "enabled" to "disabled"
	CON2	IO2	Function parameterizable (see "Optional interface functions" table) Factory setting: Analog input 0-10 V/PWM, Ri=100 kΩ, function: set value Characteristic curve parameterizable (see input characteristic curve P1-IN), SELV
	CON2	IO3	Function parameterizable (see "Optional interface functions" table) Factory setting: Analog output 0-10 V, max. 5 mA, function: Actual speed Characteristic curve parametrizable (see output characteristic curve P3-OUT), SELV
	CON2	Vout	Voltage output 3.3-24 VDC +/-5%, Pmax=800 mW, voltage parameterizable Factory setting: 10 VDC short-circuit-proof, supply for external devices, SELV alternatively: 15-50 VDC input for parameterization via MODBUS without line voltage
	CON2	COM	Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on supply side and on control interface side
	CON2	NC	Status relay, floating status contact, break for failure
		LED	green: status = good, ready for operation orange: status = warning red: status = failure
		P1-IN	Input characteristic curve
		P3-OUT	Output characteristic curve

Terminal/plug assignment

CON2	configurable IO mode	electrical specification	configurable IO functions: normal / inverse	MODBUS Register for IO mode configuration	source: set value	source: sensor value	switch: parameter set: #1 / #2	switch: control function: heating (pos.) / cooling (neg.)	switch: direction of rotation: cw / ccw	switch: set value source	switch: fan enable / disable	signal: tach out (selected directly via IO mode)	signal: diagnostics out (selected directly via IO mode)	signal: fan modulation level %	signal: actual speed	signal: system modulation level %	signal: remote control output 0-10V	pulse input for auto-addressing	pulse output for auto-addressing
IO1	◦ Din1 (active high): digital input	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1.5VDC		D158 [0]	◦		◦	◦	◦	◦	◦							◦	
	◦ Ain1 0-10V/PWM: analog input	RI = 100K, characteristic curve parameterizable, $f_{PWM} = 1k..10kHz$, SELV		D158 [2]															
	◦ Tach out (open collector output)	Umax = 50VDC, Imax = 20mA, SELV		D158 [5]								◦							
	◦ Diagnostics out (open collector output)	Umax = 50VDC, Imax = 20mA, SELV		D158 [6]									◦						
IO2	◦ Din2 (active high): digital input	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1.5VDC		D159 [0]			◦	◦	◦	◦	◦								
	◦ Ain2 0-10V/PWM: analog input	RI = 100K, characteristic curve parameterizable, $f_{PWM} = 1k..10kHz$, SELV		D159 [2]															
	◦ Ain2 4-20mA: analog input	RI = 125R, characteristic curve parameterizable, SELV		D159 [3]	◦														
	◦ Din3 (active high): digital input	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1.5VDC		D15A [0]							◦								
IO3	◦ Din3 (active low): digital input	active: applied voltage < 1.5VDC, SELV not active: pin open or applied voltage 3.5-50VDC		D15A [1]						◦									
	◦ PWMIn3: digital input idle level high	PWM = 40Hz - 10kHz, characteristics parameterizable		D15A [7]															
	◦ PWMIn3: digital input idle level low	active: pin open or applied voltage 3.5-50VDC not active: applied voltage < 1.5VDC, SELV		D15A [8]	◦														
	◦ Aout3 0-10V: analog output	active: applied voltage 3.5-50VDC not active: pin open or applied voltage < 1.5VDC, SELV		D15A [4]														◦	
RSA RSB	◦ Tacho out (pulses), analog output	function parameterizable, max. 5mA max output frequency 300Hz SELV		D15A [5]								◦							
	◦ Diagnostics out (pulses)	0-10V/max. 5mA max output frequency 300Hz SELV		D15A [6]															
	◦ Diagnostics out (pulses)	0-10V/max. 5mA max output frequency 300Hz SELV		D15A [6]															
	◦ Diagnostics out (pulses)	MODBUS RTU, specification V6.4, SELV		D15A [6]															
Vout	◦ voltage output	voltage output		D16E [..]															
	◦ alternatively: Input auxiliary power supply for parameterization via RS485/MODBUS RTU without line voltage	voltage parameterizable 3.3...24VDC +/- 5%, Pmax=800mW, short-circuit-proof, supply for external devices, SELV 15...50VDC		D16E [..]															

◦ configurable option

For further information and additional functions see EC Control Software, Fan-Set-App, or MODBUS Parameter Specification V6.4


8300100614

VWA0910CTTRS

EC axial fan - AxiEco

with inlet ring and guard grill

Curves: Air performance 50 Hz

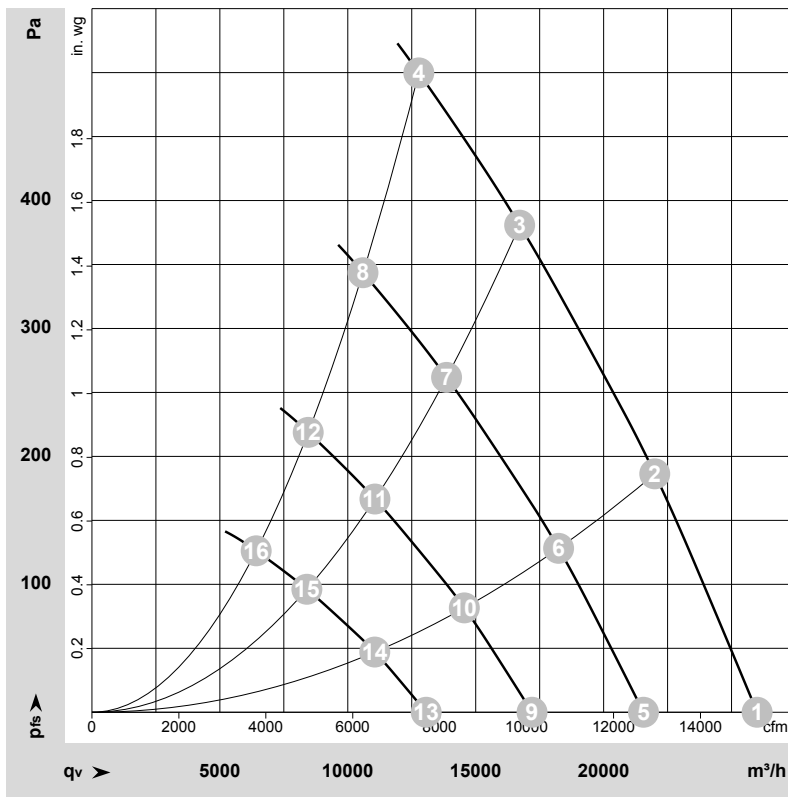

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-221585-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m³/h	Pa	cfm	in. wg
1	3~	400	50	1190	2120	3.07	83	90	92	26000	0	15305	0.00
2	3~	400	50	1190	2860	4.14	78	85	87	22000	190	12950	0.76
3	3~	400	50	1190	3415	4.94	74	81	84	16720	385	9840	1.55
4	3~	400	50	1190	3575	5.20	75	82	88	12800	500	7535	2.01
5	3~	400	50	990	1209	1.75	79	85	87	21560	0	12690	0.00
6	3~	400	50	990	1630	2.36	73	81	82	18240	130	10735	0.52
7	3~	400	50	990	1946	2.81	69	77	79	13860	263	8160	1.06
8	3~	400	50	990	2039	2.95	70	78	83	10595	344	6235	1.38
9	3~	400	50	790	614	0.89	73	80	81	17205	0	10125	0.00
10	3~	400	50	790	828	1.20	68	75	76	14555	83	8565	0.33
11	3~	400	50	790	989	1.43	63	71	74	11060	168	6510	0.67
12	3~	400	50	790	1036	1.50	64	72	78	8455	219	4975	0.88
13	3~	400	50	600	269	0.39	66	73	74	13065	0	7690	0.00
14	3~	400	50	600	363	0.53	61	68	70	11055	48	6505	0.19
15	3~	400	50	600	433	0.63	57	64	67	8400	97	4945	0.39
16	3~	400	50	600	454	0.66	57	65	71	6420	126	3780	0.51

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
LwA_{out} = Sound power level outlet side · q_v = Air flow · p_{fs} = Pressure increase

