

8300100627
VCH0310CTRLS

EC centrifugal module - RadiPac

backward-curved, single-intake
with housing

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Item	8300100627	
Motor	E11233-60	
Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Method of obtaining data		ml
Status		prelim.
Speed (rpm)	min ⁻¹	4560
Power consumption	W	2750
Current draw	A	4.3
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	40

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	71.8	56.1	09 Power consumption P_{ed}	kW	2.75
02 Measurement category		A		09 Air flow q_v	m ³ /h	3790
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	1792
04 Efficiency grade N		77.7	62	10 Speed (rpm) n	min ⁻¹	4570
05 Variable speed drive		Yes		11 Specific ratio*		1.02

Data obtained at optimum efficiency level.

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-223236

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.
The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).



8300100627

VCH0310CTRLS

EC centrifugal module - RadiPac

backward-curved, single-intake
with housing

Technical description

Weight	26.8 kg
Size	310 mm
Motor size	112
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum
Impeller material	PP plastic
Housing material	Sheet steel, galvanized
Support plate material	Sheet steel, galvanized
Support bracket material	Steel, painted black
Inlet nozzle material	ABS plastic
Number of blades	5
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP55
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H1
Ambient temperature note	Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings.
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	See legend on product drawing
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	- Operation and alarm display with LED - External 15-50 VDC input (parameterization) - Alarm relay - Integrated PI controller - Configurable inputs/outputs (I/O) - MODBUS V6.3 - Motor current limitation - RS-485 MODBUS-RTU - Soft start - Voltage output 3.3-24 VDC, Pmax = 800 mW - Control interface with SELV potential safely disconnected from the mains - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection - Vibration sensor
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Terminal box
Motor protection	Electronic motor protection



8300100627
VCH0310CTRLS

EC centrifugal module - RadiPac

backward-curved, single-intake
with housing

Protection class assignment	I; If a protective earth is connected by the customer This component for installation may have several local protection classes. This information relates to this component's basic design. The final protection class is based on the component's intended installation and connection.
Conformity with standards	EN 61800-5-1; CE; UKCA
Approval	CSA C22.2 No. 77 + CAN/CSA-E60730-1; EAC; UL 1004-7 + 60730-1



8300100627


VCH0310CTRLS

EC centrifugal module - RadiPac

backward-curved, single-intake

with housing

Product drawing

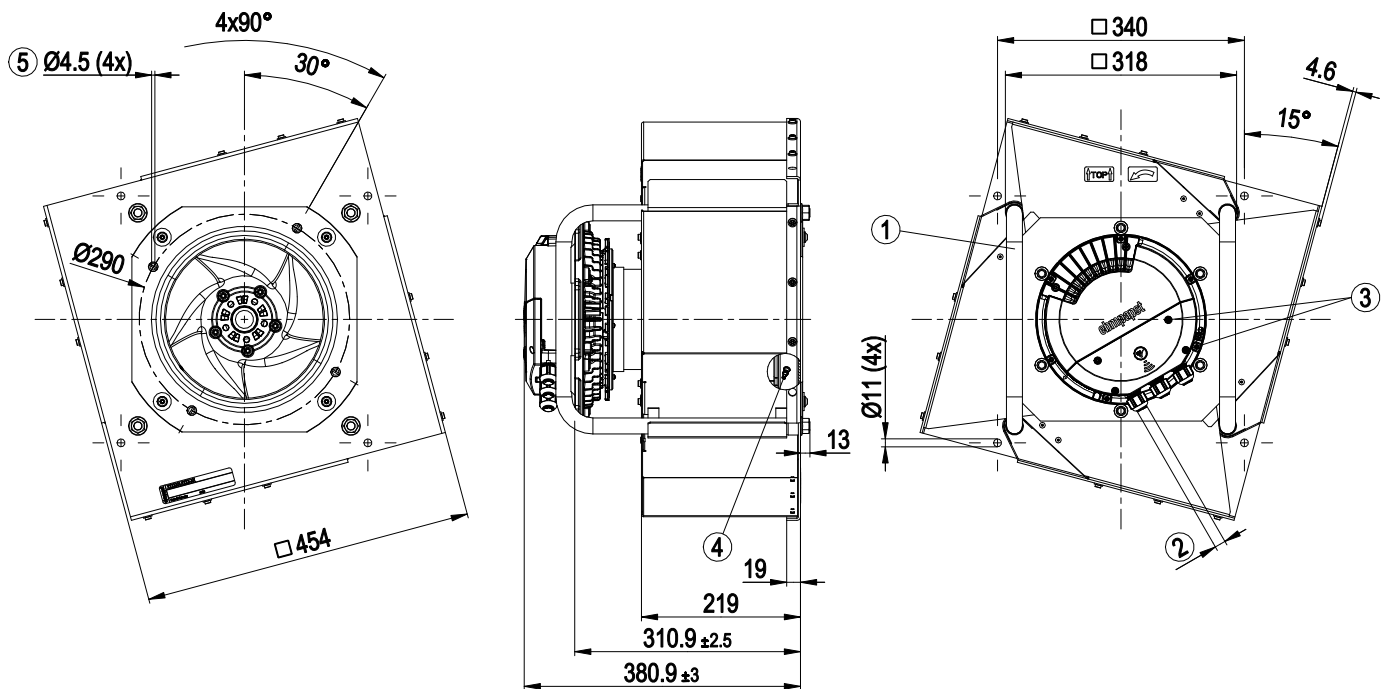


1	Installed position: shaft horizontal (install support struts only vertically as illustrated) or rotor on bottom; rotor on top on request
2	Cable diameter min. 4 mm, max. 10 mm, tightening torque 4 ± 0.6 Nm (The tightening torque is designed for PVC cables. If the cable materials are different, the tightening torque may have to be adjusted)
3	Tightening torque 1.5 ± 0.2 Nm
4	Inlet ring with pressure tap (k-factor: 115)
5	Fastening holes for FlowGrid 25310-2-2957 (not included in scope of delivery) are provided and must be subsequently opened as required



EC centrifugal module - RadiPac

backward-curved, single-intake
with housing

Connection diagram

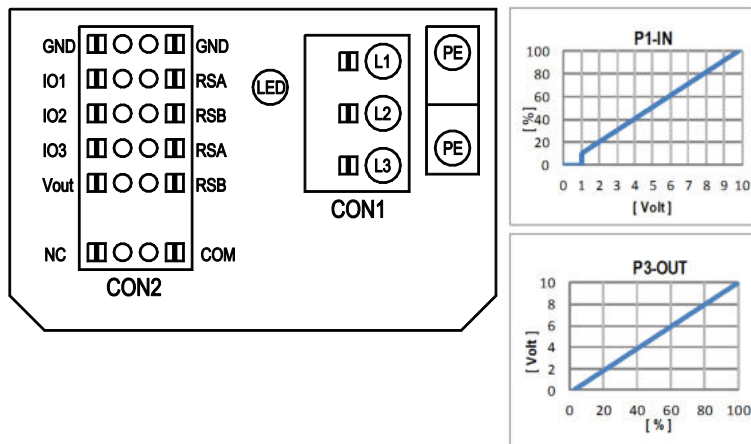

No.	Conn.	Designation	Function/assignment
	CON1	L1, L2, L3	Power supply, phase, see nameplate for voltage range
	PE	PE	Protective earth
	CON2	RSA	RS485 interface for MODBUS, RSA; SELV
	CON2	RSB	RS485 interface for MODBUS, RSB; SELV
	CON2	GND	Reference ground for control interface, SELV
	CON2	IO1	Function parameterizable (see "Optional interface functions" table) Factory setting: Digital input - high active, function: Disable input, SELV - inactive: Pin open or applied voltage < 1.5 VDC - active: applied voltage 3.5-50 VDC Reset function: Triggering of error reset on change of state from "enabled" to "disabled"
	CON2	IO2	Function parameterizable (see "Optional interface functions" table) Factory setting: Analog input 0-10 V/PWM, Ri=100 kΩ, function: Set value Characteristic curve parameterizable (see input characteristic curve P1-IN), SELV
	CON2	IO3	Function parameterizable (see "Optional interface functions" table) Factory setting: Analog output 0-10 V, max. 5 mA, function: Actual speed Characteristic curve parametrizable (see output characteristic curve P3-OUT), SELV
	CON2	Vout	Voltage output 3.3-24 VDC ±5%, Pmax=800 mW, voltage parameterizable Factory setting: 10 VDC short-circuit-proof, supply for external devices, SELV alternatively: 15-50 VDC input for parameterization via MODBUS without line voltage
	CON2	COM	Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on supply side and on control interface side
	CON2	NC	Status relay, floating status contact, break for failure
		LED	green: status = good, ready for operation orange: status = warning red: status = failure
		P1-IN	Input characteristic curve
		P3-OUT	Output characteristic curve

8300100627

VCH0310CTRLS

EC centrifugal module - RadiPac

backward-curved, single-intake

with housing

Terminal/plug assignment

configurable IO functions: normal / inverse		MODBUS Register for IO mode configuration	electrical specification		configurable IO mode		CON2										
					CON2												
IO1	○ Din1 (active high): digital input	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC	D158 [0]	○	○	switch: fan enable / disable	(selected directly via IO mode)	signal: tach out	signal: diagnostics out	signal: fan modulation level %	signal: actual speed	D130 [1]	D130 [2]	D130 [5]	D130 [1]	D00C [1]	D130 [4]
	○ Ain1 0-10V/PWM: analog input	RI = 100K, characteristic curve parameterizable, $f_{PWM} = 1k..10kHz$, SELV	D158 [2]	○	○	switch: set value source	(selected directly via IO mode)	switch: control function: heating (pos.) / cooling (neg.)	switch: direction of rotation: cw / ccw	D16C [...]	D16A [...]	D130 [0]	D130 [2]	D130 [5]	D130 [1]	D00C [1]	D130 [4]
	○ Tach out (open collector output)	Umax = 50VDC, Imax = 20mA SELV	D158 [5]	○	○	switch: parameter set: #1 / #2	(selected directly via IO mode)	switch: control function: heating (pos.) / cooling (neg.)	switch: direction of rotation: cw / ccw	D16C [...]	D16A [...]	D130 [0]	D130 [2]	D130 [5]	D130 [1]	D00C [1]	D130 [4]
	○ Diagnostics out (open collector output)	Umax = 50VDC, Imax = 20mA SELV	D158 [6]			source: set value	(selected directly via IO mode)	switch: parameter set: #1 / #2	switch: direction of rotation: cw / ccw	D16C [...]	D16A [...]	D130 [0]	D130 [2]	D130 [5]	D130 [1]	D00C [1]	D130 [4]
IO2	○ Din2 (active high): digital input	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC	D159 [0]		○	source: sensor value	(selected directly via IO mode)	switch: control function: heating (pos.) / cooling (neg.)	switch: direction of rotation: cw / ccw	D16C [...]	D16A [...]	D130 [0]	D130 [2]	D130 [5]	D130 [1]	D00C [1]	D130 [4]
	○ Ain2 0-10V/PWM: analog input	RI = 100K, characteristic curve parameterizable, $f_{PWM} = 1k..10kHz$, SELV	D159 [2]	○	○	source: set value	(selected directly via IO mode)	switch: control function: heating (pos.) / cooling (neg.)	switch: direction of rotation: cw / ccw	D16C [...]	D16A [...]	D130 [0]	D130 [2]	D130 [5]	D130 [1]	D00C [1]	D130 [4]
	○ Ain2 4-20mA: analog input	RI = 125R, characteristic curve parameterizable, SELV	D159 [3]			source: set value	(selected directly via IO mode)	switch: control function: heating (pos.) / cooling (neg.)	switch: direction of rotation: cw / ccw	D16C [...]	D16A [...]	D130 [0]	D130 [2]	D130 [5]	D130 [1]	D00C [1]	D130 [4]
	○ Din3 (active high): digital input	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC	D15A [0]			source: set value	(selected directly via IO mode)	switch: control function: heating (pos.) / cooling (neg.)	switch: direction of rotation: cw / ccw	D16C [...]	D16A [...]	D130 [0]	D130 [2]	D130 [5]	D130 [1]	D00C [1]	D130 [4]
IO3	○ Din3 (active low): digital input	active: applied voltage < 1,5VDC, SELV not active: pin open or applied voltage 3.5-50VDC	D15A [1]		○	source: sensor value	(selected directly via IO mode)	switch: control function: heating (pos.) / cooling (neg.)	switch: direction of rotation: cw / ccw	D16C [...]	D16A [...]	D130 [0]	D130 [2]	D130 [5]	D130 [1]	D00C [1]	D130 [4]
	○ PWMMin3: digital input, idle level high	PWM = 40Hz - 10kHz, characteristics parameterizable	D15A [7]	○	○	source: set value	(selected directly via IO mode)	switch: control function: heating (pos.) / cooling (neg.)	switch: direction of rotation: cw / ccw	D16C [...]	D16A [...]	D130 [0]	D130 [2]	D130 [5]	D130 [1]	D00C [1]	D130 [4]
	○ PWMMin3: digital input, idle level low	active: pin open or applied voltage 3.5-50VDC not active: applied voltage < 1,5VDC, SELV	D15A [8]	○	○	source: set value	(selected directly via IO mode)	switch: control function: heating (pos.) / cooling (neg.)	switch: direction of rotation: cw / ccw	D16C [...]	D16A [...]	D130 [0]	D130 [2]	D130 [5]	D130 [1]	D00C [1]	D130 [4]
	○ Aout3 0-10V: analog output	active: applied voltage 3.5-50VDC not active: pin open or applied voltage < 1,5VDC, SELV	D15A [4]			source: set value	(selected directly via IO mode)	switch: control function: heating (pos.) / cooling (neg.)	switch: direction of rotation: cw / ccw	D16C [...]	D16A [...]	D130 [0]	D130 [2]	D130 [5]	D130 [1]	D00C [1]	D130 [4]
RSA RSB	○ Tacho out (pulses), analog output	function parameterizable, max. 5mA max output frequency 300Hz SELV	D15A [5]			source: sensor value	(selected directly via IO mode)	switch: control function: heating (pos.) / cooling (neg.)	switch: direction of rotation: cw / ccw	D16C [...]	D16A [...]	D130 [0]	D130 [2]	D130 [5]	D130 [1]	D00C [1]	D130 [4]
	○ Diagnostics out (pulses)	0-10V/max. 5mA max output frequency 300Hz SELV	D15A [6]			source: sensor value	(selected directly via IO mode)	switch: control function: heating (pos.) / cooling (neg.)	switch: direction of rotation: cw / ccw	D16C [...]	D16A [...]	D130 [0]	D130 [2]	D130 [5]	D130 [1]	D00C [1]	D130 [4]
	○ Diagnostics out (pulses)	0-10V/max. 5mA max output frequency 300Hz SELV	D15A [6]			source: sensor value	(selected directly via IO mode)	switch: control function: heating (pos.) / cooling (neg.)	switch: direction of rotation: cw / ccw	D16C [...]	D16A [...]	D130 [0]	D130 [2]	D130 [5]	D130 [1]	D00C [1]	D130 [4]
	○ Diagnostics out (pulses)	MODBUS RTU, specification V6.3, SELV	D15A [6]			source: sensor value	(selected directly via IO mode)	switch: control function: heating (pos.) / cooling (neg.)	switch: direction of rotation: cw / ccw	D16C [...]	D16A [...]	D130 [0]	D130 [2]	D130 [5]	D130 [1]	D00C [1]	D130 [4]
Vout	voltage output	voltage parameterizable 3.3..24VDC +/- 5%, Pmax=800mW, short-circuit-proof, supply for external devices, SELV	D16E [...]			source: sensor value	(selected directly via IO mode)	switch: control function: heating (pos.) / cooling (neg.)	switch: direction of rotation: cw / ccw	D16C [...]	D16A [...]	D130 [0]	D130 [2]	D130 [5]	D130 [1]	D00C [1]	D130 [4]
	alternatively: Input auxiliary power supply for parameterization via RS485/MODBUS RTU without line voltage	15..50VDC	D16E [...]			source: sensor value	(selected directly via IO mode)	switch: control function: heating (pos.) / cooling (neg.)	switch: direction of rotation: cw / ccw	D16C [...]	D16A [...]	D130 [0]	D130 [2]	D130 [5]	D130 [1]	D00C [1]	D130 [4]

○ configurable option

For further information and additional functions see EC Control Software, Fan-Set-App, or MODBUS Parameter Specification V6.3

○ configurable option

For further information and additional functions see EC Control Software, Fan-Set-App, or MODBUS Parameter Specification V6.3




8300100627

VCH0310CTRLS

EC centrifugal module - RadiPac

backward-curved, single-intake
with housing

Curves: Air performance 50 Hz

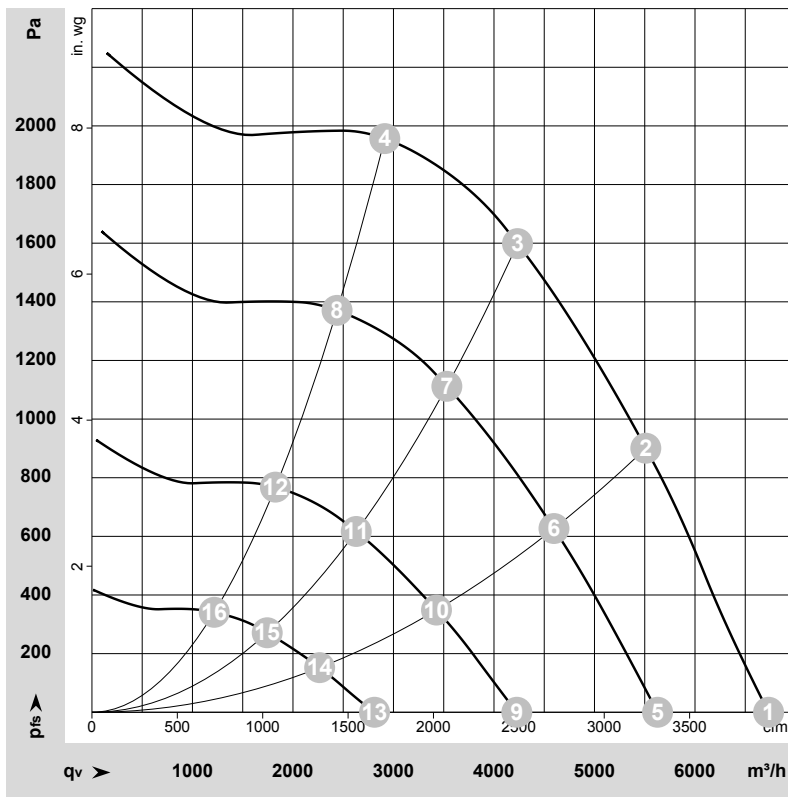

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-223236-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	LwA	q _v	P _{fs}	q _v	P _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	dB	m ³ /h	Pa	cfm	in. wg
1	3~	400	50	4560	1874	2.96	88	95	105	105	6730	0	3960	0.00
2	3~	400	50	4560	2555	3.96	81	88	101	101	5510	900	3245	3.61
3	3~	400	50	4560	2750	4.30	76	84	98	98	4235	1600	2490	6.42
4	3~	400	50	4560	2607	4.03	79	88	99	99	2915	1975	1715	7.93
5	3~	400	50	3815	1154	1.92	83	91	99	100	5630	0	3315	0.00
6	3~	400	50	3805	1496	2.41	76	83	95	95	4595	627	2705	2.52
7	3~	400	50	3805	1634	2.61	71	80	92	92	3530	1113	2080	4.47
8	3~	400	50	3810	1541	2.47	74	83	92	93	2440	1379	1435	5.54
9	3~	400	50	2855	529	1.08	76	85	91	92	4225	0	2490	0.00
10	3~	400	50	2855	695	1.30	69	77	86	87	3430	349	2020	1.40
11	3~	400	50	2855	743	1.36	65	73	84	84	2630	618	1550	2.48
12	3~	400	50	2855	722	1.33	66	74	84	84	1825	773	1075	3.10
13	3~	400	50	1905	198	0.56	67	75	79	80	2810	0	1655	0.00
14	3~	400	50	1905	246	0.65	60	68	74	75	2265	152	1335	0.61
15	3~	400	50	1905	262	0.68	56	63	71	72	1745	272	1025	1.09
16	3~	400	50	1905	253	0.66	56	64	72	72	1215	342	715	1.37

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
LwA_{out} = Sound power level outlet side · q_v = Air flow · P_{fs} = Pressure increase

