

8300100964  
VBS0225SSLES

# EC centrifugal fan - RadiCal

backward-curved, single-intake

## ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

## Nominal data

Item	8300100964	
Motor	E06002-23	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min <sup>-1</sup>	2900
Power consumption	W	120
Current draw	A	1.0
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change

8300100964  
VBS0225SSLES

# EC centrifugal fan - RadiCal

backward-curved, single-intake

## Technical description


Weight	1.39 kg
Size	225 mm
Motor size	60
Rotor surface	Thick-film passivated
Electronics housing material	Die-cast aluminum
Impeller material	PP plastic
Number of blades	7
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing
Technical features	<ul style="list-style-type: none"><li>- Output 10 VDC, max. 10 mA</li><li>- Locked-rotor detection</li><li>- Tach output</li><li>- Speed control</li><li>- Power limiter</li><li>- Motor current limitation</li><li>- Soft start</li><li>- Control input 0-10 VDC / PWM</li><li>- Control interface with SELV potential safely disconnected from the mains</li><li>- Overvoltage detection</li><li>- Thermal overload protection for electronics/motor</li><li>- Line undervoltage detection</li></ul>
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-3 (household environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Electronic motor protection
With cable	Variable
Protection class assignment	I; If a protective earth is connected by the customer This component for installation may have several local protection classes. This information relates to this component's basic design. The final protection class is based on the component's intended installation and connection.
Conformity with standards	EN 60335-1; EN 60034-1; EN 60204-1; CE; UKCA
Comment on CE	Ecodesign Directive 2009/125/EC + Fan Directive (EC) No. 327/2011 does not apply, as power consumption <125W.

8300100964  
VBS0225SSLES

# EC centrifugal fan - RadiCal


backward-curved, single-intake

## Product drawing

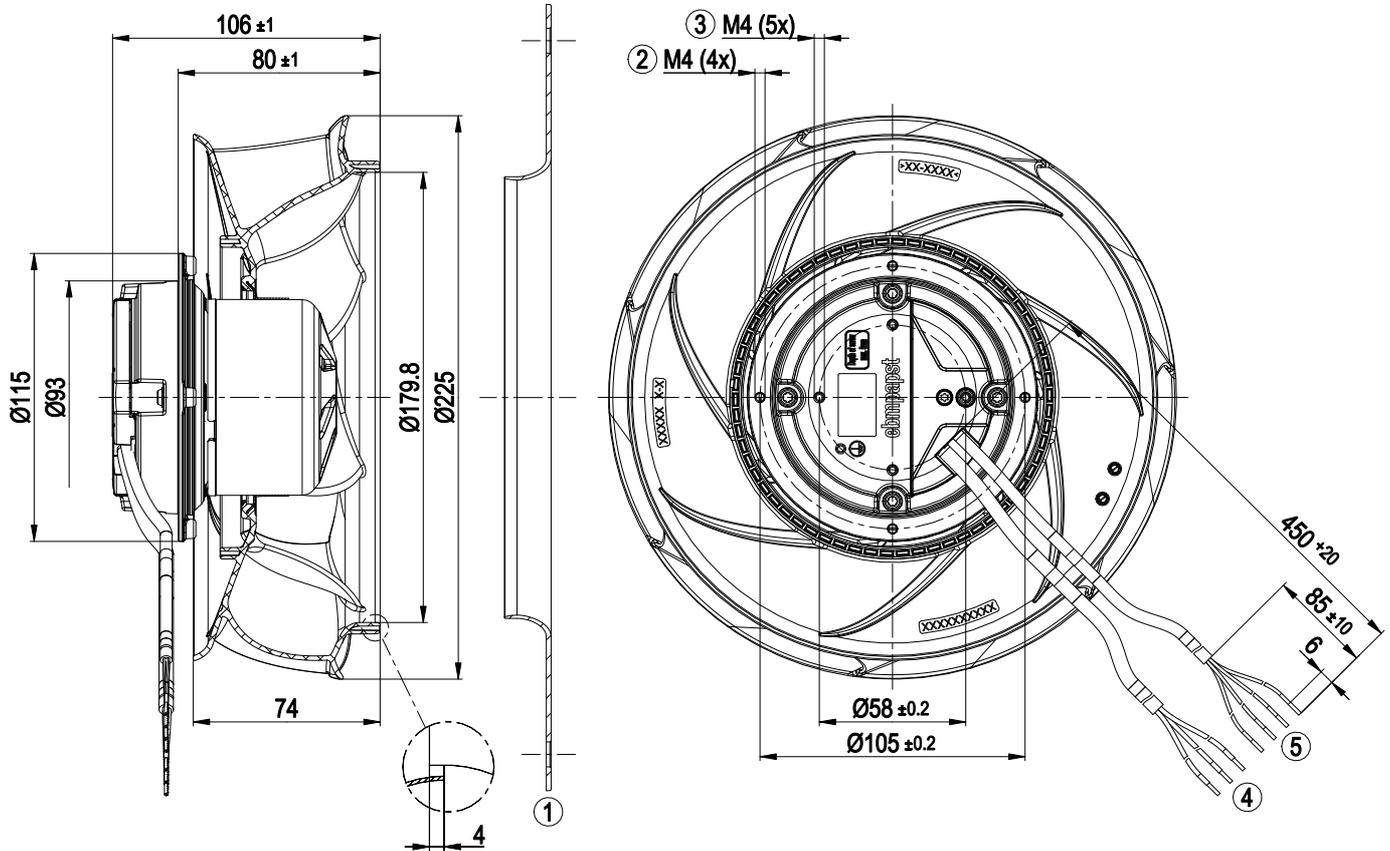

1	Inlet ring 8217118485 not included in scope of delivery
2	Max. clearance for screw 6 mm
3	Max. clearance for screw 5 mm
4	Supply line (PWR) PVC AWG20 3x splice
5	Control wire (CTRL) PVC AWG22 4x splice

## Accessory part

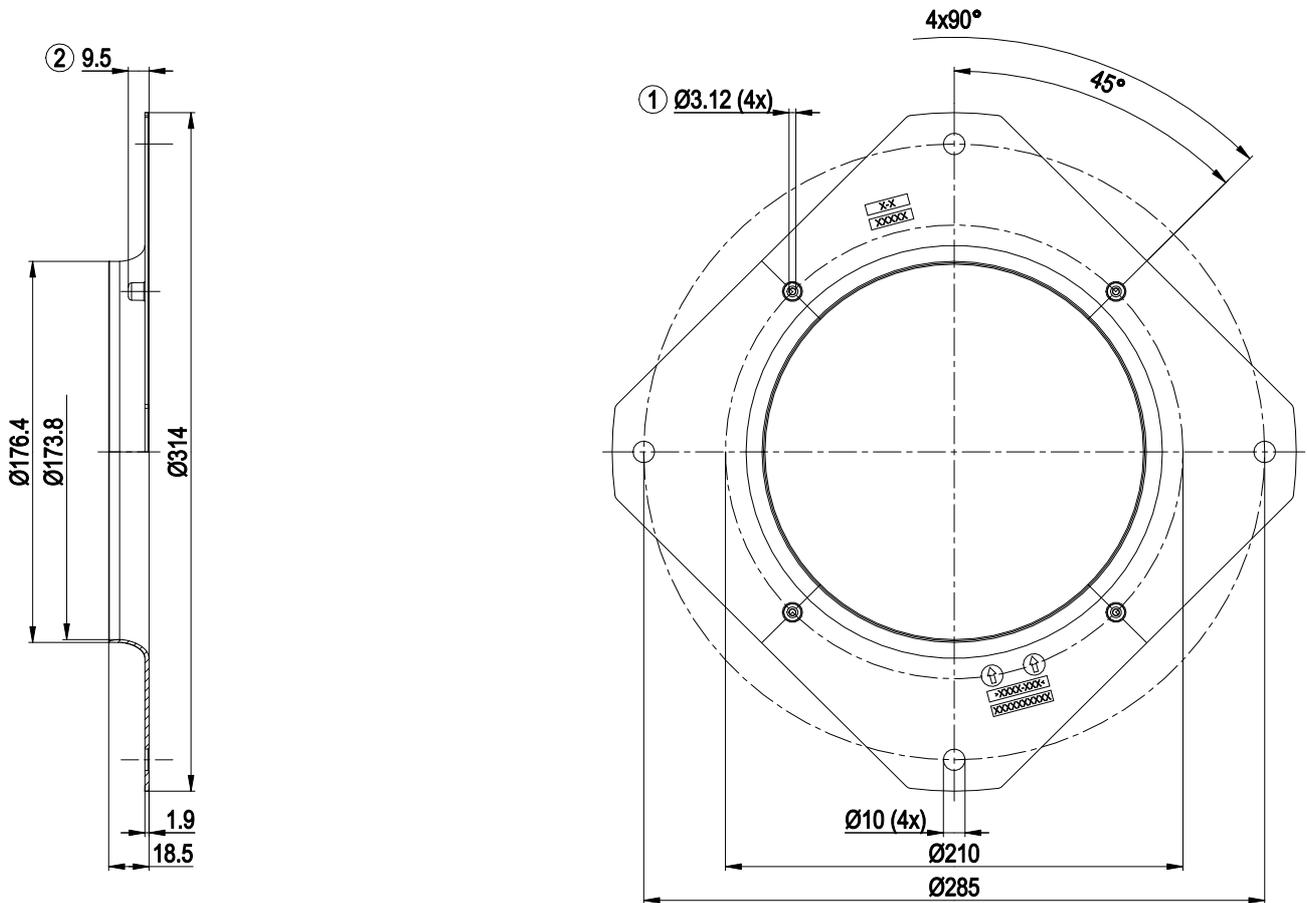


-	Inlet ring 8217118485
1	Fastening holes for FlowGrid 8217118468 (not included in scope of delivery) are provided and must be subsequently opened as required
2	Screw-on domes are only permissible for Flowgrid!

# EC centrifugal fan - RadiCal

backward-curved, single-intake

## Connection diagram

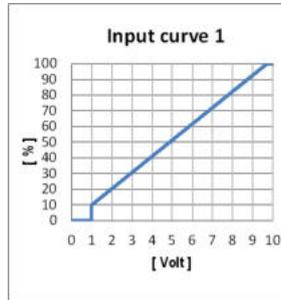

No.	Conn.	Designation	Color	Function/assignment
	PWR	L	black	Power supply, phase, see nameplate for voltage range
	PWR	N	blue	Power supply, neutral conductor, see nameplate for voltage range
	PWR	PE	green/yellow	Protective earth
	CTRL	GND	blue	Reference ground for control interface, SELV
	CTRL	IO1	yellow	Factory setting: Analog input 0-10 V/PWM, Ri=100 KΩ, fPWM=1 kHz..10 kHz, Function: Speed set value Characteristic curve parameterizable (see "Input curve 1"), SELV Function parameterizable at the factory (see Optional interface functions table)
	CTRL	IO2	white	Factory setting: Open collector output, Umax=50 VDC, Imax= 10 mA, function: Tach output 1 pulse/revolution, SELV Function parameterizable at factory (see table Optional interface functions)
	CTRL	Vout	red	Voltage output 10 VDC +/-3%, Imax=10 mA Short-circuit-proof, power supply for external devices, SELV

## Terminal/plug assignment

	configurable IO mode	electrical specification						
IO1	◦ Din1 (high active): digital input	active: parameterizable voltage x-30 VDC not active: pin open or parameterizable voltage <x VDC, SELV						
	◦ Ain1 0-10 V/PWM: analog input	RI = 100 kΩ, characteristic curve parameterizable, $f_{\text{PWM}} = 1\text{k}..10\text{ kHz}$ , SELV						
	◦ Tach out (open collector)	Umax=50 VDC, Imax=10 mA, SELV						
	◦ Diagnostics out (open collector)	Umax=50 VDC, Imax=10 mA, SELV						
IO2	◦ Alarm out (open collector)	Umax=50 VDC, Imax=10 mA, SELV						
	◦ Open collector	Umax=50 VDC, Imax=10 mA, SELV						
Vout	Voltage output	Voltage 10 VDC, SELV						


  

	INPUT	OUTPUT
source: set value	◦	
switch: parameter set: #1 / #2	◦	
switch: direction of rotation: cw / ccw	◦	
switch: enable/disable input	◦	
configurable function	◦	
signal: tach out		◦
signal: diagnostics out		◦
signal: alarm out		◦
signal: run monitoring		◦
signal: status		◦
signal: configurable function		◦

**Basic (B4)**  
Factory configuration option upon request

◦ Factory configuration option

## Curves: Air performance 50 Hz

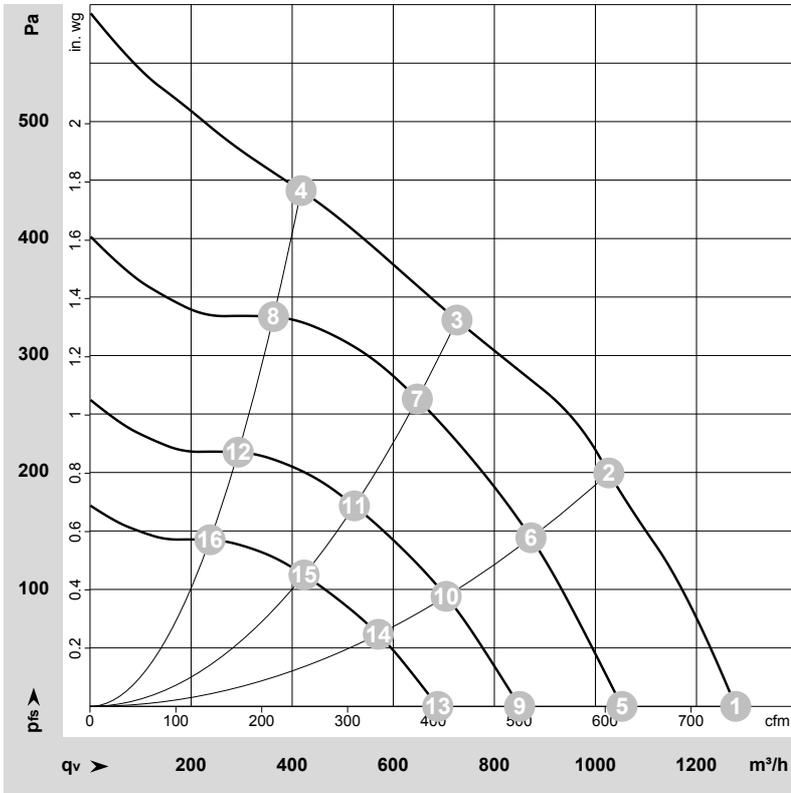

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-223922-1  
Date: 2023-01-27  
Nozzle: 8217118485

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

	Wired	U	f	n	P <sub>e</sub>	I	LpA <sub>in</sub>	LwA <sub>in</sub>	q <sub>v</sub>	P <sub>fs</sub>	q <sub>v</sub>	P <sub>fs</sub>
		V	Hz	min <sup>-1</sup>	W	A	dB(A)	dB(A)	m <sup>3</sup> /h	Pa	cfm	in. wg
1	1~	230	50	3155	91	0.77	65	74	1280	0	750	0.00
2	1~	230	50	3055	120	1.00	60	69	1025	200	605	0.80
3	1~	230	50	2900	120	1.00	58	67	725	330	425	1.32
4	1~	230	50	2990	120	1.00	67	75	420	440	245	1.77
5	1~	230	50	2600	51	0.43	60	69	1055	0	620	0.00
6	1~	230	50	2600	75	0.62	56	65	875	144	515	0.58
7	1~	230	50	2600	86	0.72	55	64	650	263	380	1.06
8	1~	230	50	2600	80	0.67	63	72	365	333	215	1.34
9	1~	230	50	2100	27	0.23	55	63	850	0	500	0.00
10	1~	230	50	2100	39	0.33	51	59	705	94	415	0.38
11	1~	230	50	2100	45	0.38	50	58	525	172	310	0.69
12	1~	230	50	2100	42	0.35	58	66	295	217	170	0.87
13	1~	230	50	1700	14	0.12	50	58	690	0	405	0.00
14	1~	230	50	1700	21	0.17	46	54	570	62	335	0.25
15	1~	230	50	1700	24	0.20	45	53	425	113	250	0.45
16	1~	230	50	1700	22	0.19	53	61	235	142	140	0.57

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
q<sub>v</sub> = Air flow · P<sub>fs</sub> = Pressure increase