

8300101159
VBH0175SSLBS

EC centrifugal module - RadiCal

backward-curved, single-intake
with housing

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Item	8300101159	
Motor	E06001-10	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	3900
Power consumption	W	85
Current draw	A	0.7
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

8300101159
VBH0175SSLBS

EC centrifugal module - RadiCal

backward-curved, single-intake
with housing

Technical description


Weight	0.001 kg
Size	175 mm
Motor size	60
Rotor surface	Thick-film passivated
Electronics housing material	Die-cast aluminum
Impeller material	PP plastic
Housing material	PP plastic
Number of blades	7
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing
Technical features	<ul style="list-style-type: none">- Output 10 VDC, max. 1.1 mA- Locked-rotor detection- Tach output- Speed control- Power limiter- Motor current limitation- Soft start- Control input 0-10 VDC / PWM- Control interface with SELV potential safely disconnected from the mains- Overvoltage detection- Thermal overload protection for electronics/motor- Line undervoltage detection
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Electronic motor protection
With cable	Variable
Protection class assignment	I; If a protective earth is connected by the customer This component for installation may have several local protection classes. This information relates to this component's basic design. The final protection class is based on the component's intended installation and connection.
Conformity with standards	EN 60335-1; EN 60034-1; EN 60204-1; CE; UKCA
Comment on CE	Ecodesign Directive 2009/125/EC + Fan Directive (EC) No. 327/2011 does not apply, as power consumption <125W.
Approval	CSA C22.2 No. 77 + CAN/CSA-E60730-1; UL 1004-7 + 60730-1

8300101159
VBH0175SSLBS

EC centrifugal module - RadiCal

backward-curved, single-intake
with housing

Product drawing

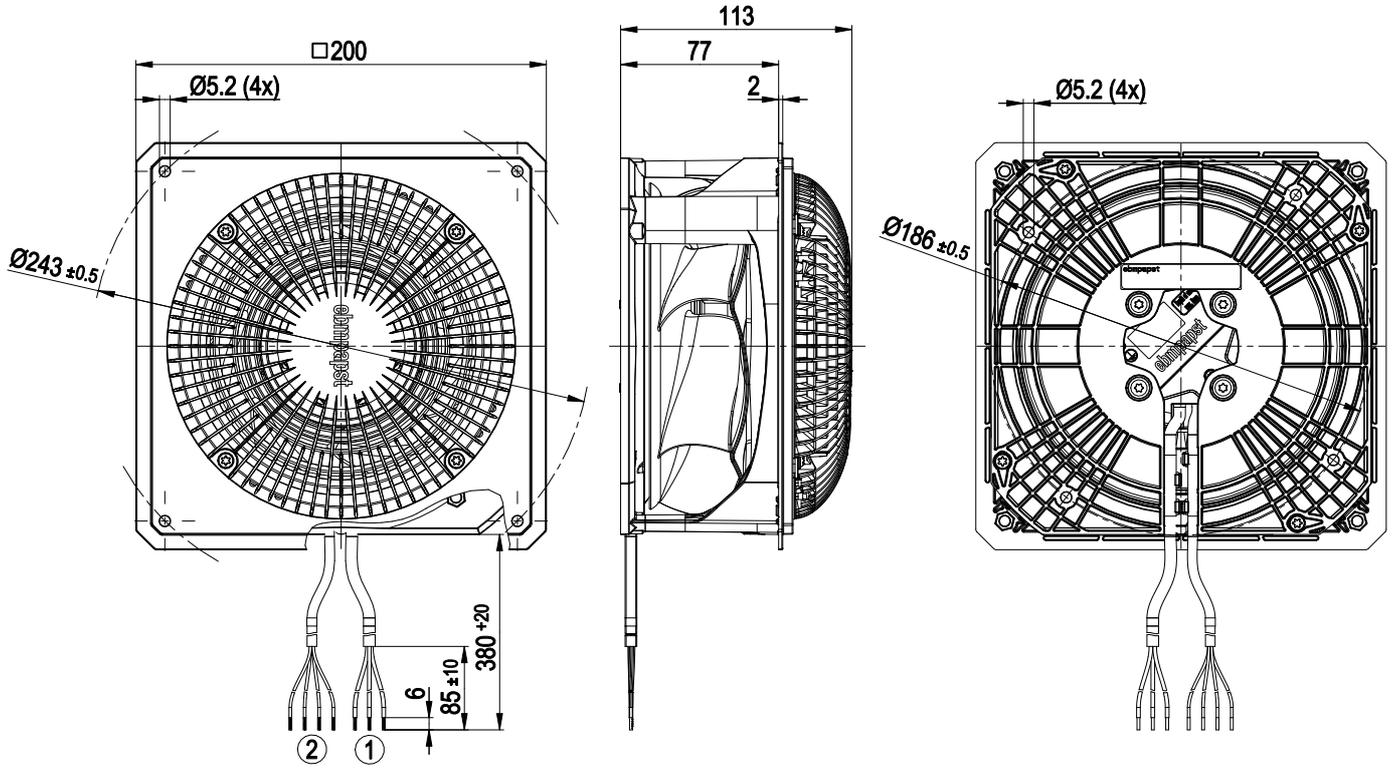


1	Supply line (PWR) PVC AWG20 3x splice
2	Control wire (CTRL) PVC AWG22 4x splice

EC centrifugal module - RadiCal


backward-curved, single-intake
with housing

Mounting dimensions

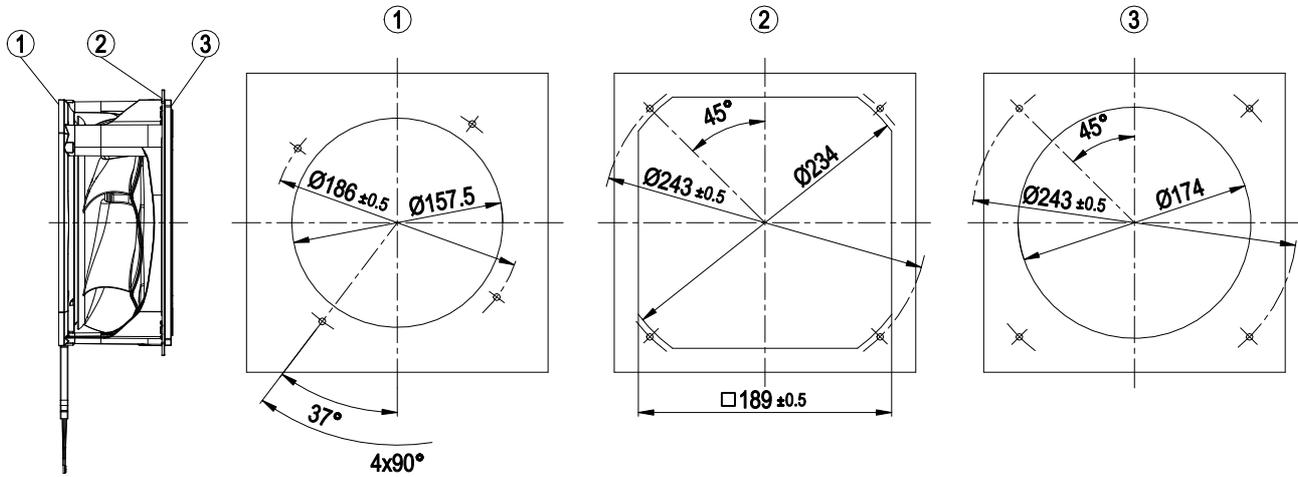

1	Installation of motor plate
2	Installation of nozzle plate on outlet side
3	Installation of nozzle plate on intake side

Connection diagram

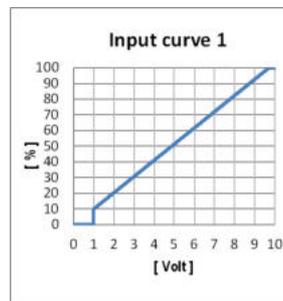

No.	Conn.	Designation	Color	Function/assignment
	PWR	L	black	Power supply, phase, see nameplate for voltage range
	PWR	N	blue	Power supply, neutral conductor, see nameplate for voltage range
	PWR	PE	green/yellow	Protective earth
	CTRL	GND	blue	Reference ground for control interface, SELV
	CTRL	IO1	yellow	Factory setting: Analog input 0-10 V/PWM, Ri=100 KΩ, fPWM=1 kHz..10 kHz, Function: Speed set value Characteristic curve parameterizable (see "Input curve 1"), SELV Function parameterizable at the factory (see Optional interface functions table)
	CTRL	IO2	white	Factory setting: Open collector output, Umax=50 VDC, Imax= 10 mA, function: Tach output 1 pulse/revolution, SELV Function parameterizable at factory (see table Optional interface functions)
	CTRL	Vout	red	Voltage output 10 VDC +/-3%, Imax=1.1 mA Not short-circuit-proof, power supply for external devices, SELV

EC centrifugal module - RadiCal

backward-curved, single-intake
with housing

Terminal/plug assignment

	configurable IO mode	electrical specification						
IO1	◦ Din1 (high active): digital input	active: parameterizable voltage x-30 VDC not active: pin open or parameterizable voltage <x VDC, SELV						
	◦ Ain1 0-10 V/PWM: analog input	RI = 100 kΩ, characteristic curve parameterizable, $f_{\text{PWM}} = 1\text{k}..10\text{kHz}$, SELV						
	◦ Tach out (open collector)	Umax=50 VDC, Imax=10 mA, SELV						
	◦ Diagnostics out (open collector)	Umax=50 VDC, Imax=10 mA, SELV						
IO2	◦ Alarm out (open collector)	Umax=50 VDC, Imax=10 mA, SELV						
	◦ Open collector	Umax=50 VDC, Imax=10 mA, SELV						
Vout	Voltage output	Voltage 10 VDC, SELV						

	INPUT	OUTPUT						
source: set value	◦							
switch: parameter set: #1 / #2	◦							
switch: direction of rotation: cw / ccw	◦							
switch: enable/disable input	◦							
configurable function	◦	◦						
signal: tach out								◦
signal: diagnostics out							◦	
signal: alarm out								◦
signal: run monitoring								◦
signal: status								◦
signal: configurable function								◦


Basic (B4)
Factory configuration option upon request

◦ Factory configuration option

EC centrifugal module - RadiCal

backward-curved, single-intake
with housing

Curves: Air performance 50 Hz

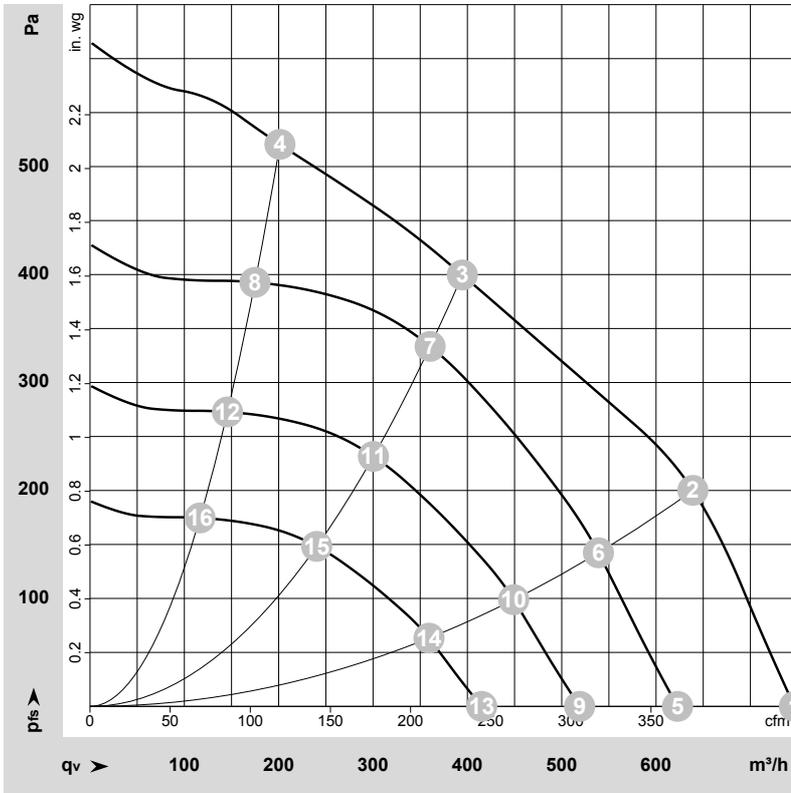

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-227296-1
Date: 2023-06-15
Nozzle: 8217117486

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	LpA _{in}	LwA _{in}	q _v	P _{fs}	q _v	P _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m ³ /h	Pa	cfm	in. wg
1	1~	230	50	4315	73	0.60	69	77	745	0	440	0.00
2	1~	230	50	4270	85	0.70	66	73	640	200	375	0.80
3	1~	230	50	3900	85	0.70	62	70	395	400	230	1.61
4	1~	230	50	4140	85	0.70	69	78	200	520	120	2.09
5	1~	230	50	3600	42	0.35	65	72	625	0	365	0.00
6	1~	230	50	3600	52	0.42	61	69	540	142	315	0.57
7	1~	230	50	3600	67	0.54	59	67	360	334	210	1.34
8	1~	230	50	3600	58	0.47	66	74	175	393	105	1.58
9	1~	230	50	3000	25	0.20	60	68	520	0	305	0.00
10	1~	230	50	3000	30	0.25	57	64	450	99	265	0.40
11	1~	230	50	3000	39	0.31	54	63	300	232	175	0.93
12	1~	230	50	3000	33	0.27	61	70	145	273	85	1.10
13	1~	230	50	2400	13	0.10	54	62	415	0	245	0.00
14	1~	230	50	2400	16	0.13	51	59	360	63	210	0.25
15	1~	230	50	2400	20	0.16	49	57	240	149	140	0.60
16	1~	230	50	2400	17	0.14	55	64	115	175	70	0.70

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
q_v = Air flow · P_{fs} = Pressure increase