

8300101373
VVY0400HSNFS

EC axial panel fan - HyBlade

sickle-shaped blades (S series)

ebm-papst Mulfingen GmbH & Co. KG
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.fansco.com
www.fansco.com

Limited partnership · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRA 590344
General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Item	8300101373	
Motor	E07433-29	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		ml
Status		prelim.
Speed (rpm)	min ⁻¹	1175
Power consumption	W	170
Current draw	A	1.4
Max. back pressure	Pa	85
Max. back pressure	in. wg	0.34
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · oe = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	40.3	28.6	09 Power consumption P_{ed}	kW	0.15
02 Measurement category		A		09 Air flow q_v	m³/h	2650
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	77
04 Efficiency grade N		51.7	40	10 Speed (rpm) n	min ⁻¹	1175
05 Variable speed drive		Yes		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.
The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.
The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).

* Specific ratio = $1 + p_s / 100\,000\text{ Pa}$ LU-229403

8300101373
VVY0400HSNFS

EC axial panel fan - HyBlade

sickle-shaped blades (S series)

Technical description

Size	400 mm
Motor size	74
Rotor surface	Thick-film passivated
Electronics housing material	Die-cast aluminum
Impeller material	Press-fitted sheet steel blank, sprayed with PP plastic
Number of blades	5
Airflow direction	V
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 10 mA - Locked-rotor detection - Tach output - Speed control - Power limiter - Motor current limitation - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Overvoltage detection - Thermal overload protection for electronics/motor - Line undervoltage detection
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Electronic motor protection
With cable	Variable
Protection class assignment	I; If a protective earth is connected by the customer This component for installation may have several local protection classes. This information relates to this component's basic design. The final protection class is based on the component's intended installation and connection.
Conformity with standards	EN 60335-1; EN 60034-1; EN 60204-1; CE; UKCA
Approval	CSA C22.2 No. 77 + CAN/CSA-E60730-1; UL 1004-7 + 60730-1


8300101373

VVY0400HSNFS

EC axial panel fan - HyBlade

sickle-shaped blades (S series)

Product drawing

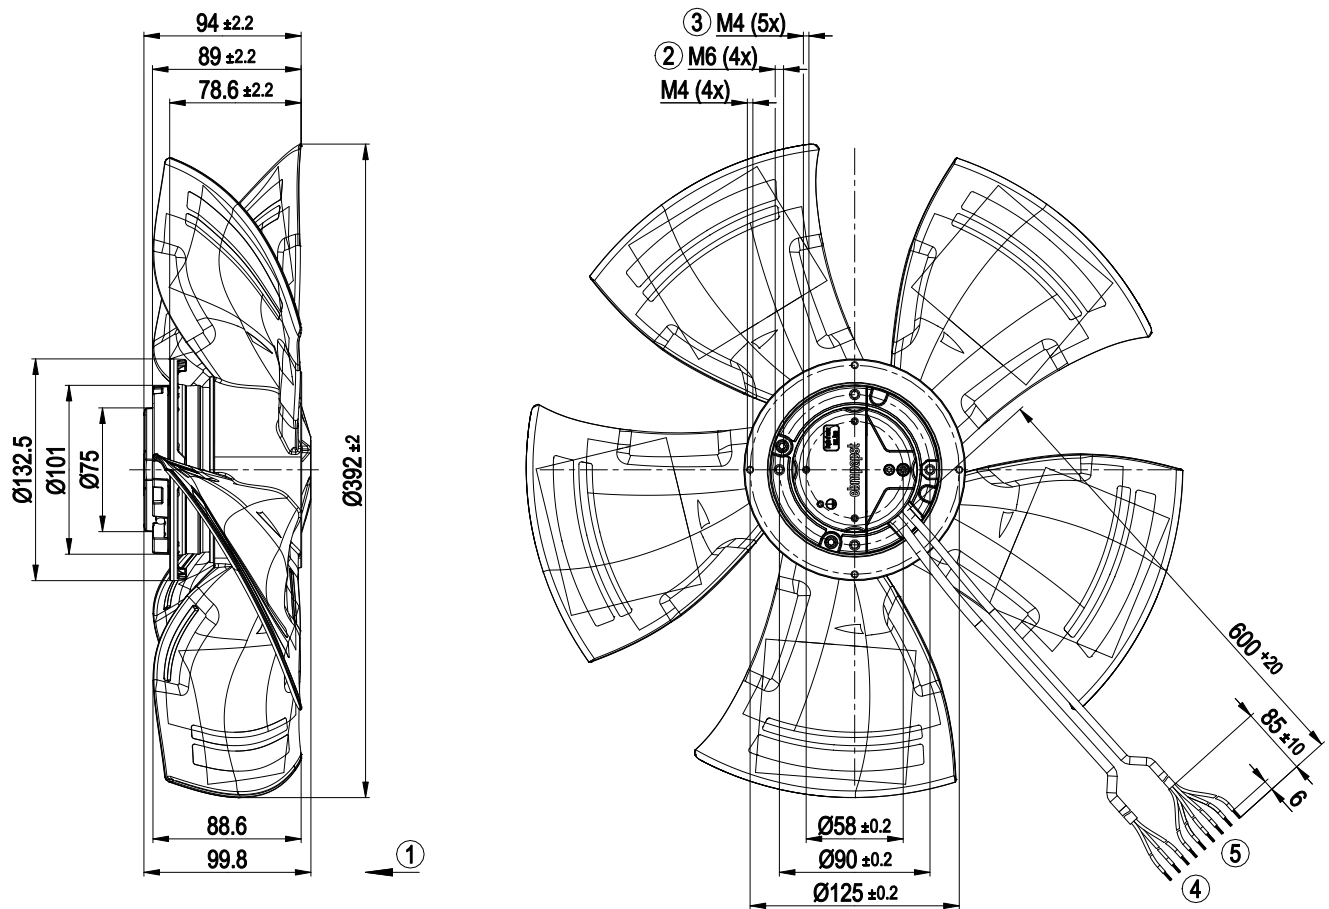

1	Airflow direction "V"
2	Max. clearance for screw 10 mm
3	Max. clearance for screw 5 mm
4	Supply line (PWR) PVC AWG20
	3x splice
5	Control wire (CTRL) PVC AWG22
	6x splice

Connection diagram




No.	Conn.	Designation	Color	Function/assignment
	PWR	L	black	Power supply, phase, see nameplate for voltage range
	PWR	N	blue	Power supply, neutral conductor, see nameplate for voltage range
	PWR	PE	green/yellow	Protective earth
	CTRL	GND	blue	Reference ground for control interface, SELV
	CTRL	IO1	yellow	Factory setting: Analog input 0-10 V/PWM, Ri=100 KΩ, fPWM=1 kHz..10 kHz, Function: Speed set value Characteristic curve parameterizable (see "Input curve 1"), SELV Function parameterizable at the factory (see Optional interface functions table)
	CTRL	IO2	white	Factory setting: Open collector output, Umax=50 VDC, Imax= 10 mA, function: Tach output 1 pulse/revolution, SELV Function parameterizable at factory (see table Optional interface functions)
	CTRL	Vout	red	Voltage output 10 VDC +/-3%, Imax=10 mA Short-circuit-proof, power supply for external devices, SELV
	CTRL	-	gray	No function
	CTRL	-	brown	No function

VVY0400HSNFS

sickle-shaped blades (S series)

Basic (B4)									
Factory configuration option upon request									
Factory configuration option									
IO1	configurable IO mode			electrical specification			INPUT		
							OUTPUT		
IO2	Dim1 (high active): digital input			active: parameterizable voltage x-30 VDC					
				not active: pin open or parameterizable voltage <x VDC, SELV					
	Ain1 0-10 V/PWM: analog input			Ri = 100 kΩ, characteristic curve parameterizable, $f_{PWM} = 1k..10\text{ kHz}$, SELV					
	Tach out (open collector)			Umax=50 VDC, Imax=10 mA, SELV					
	Diagnostics out (open collector)			Umax=50 VDC, Imax=10 mA, SELV					
Vout	Alarm out (open collector)			Umax=50 VDC, Imax=10 mA, SELV					
	Open collector			Umax=50 VDC, Imax=10 mA, SELV					
	Voltage output			Voltage 10 VDC, SELV					

Curves: Air performance 50 Hz

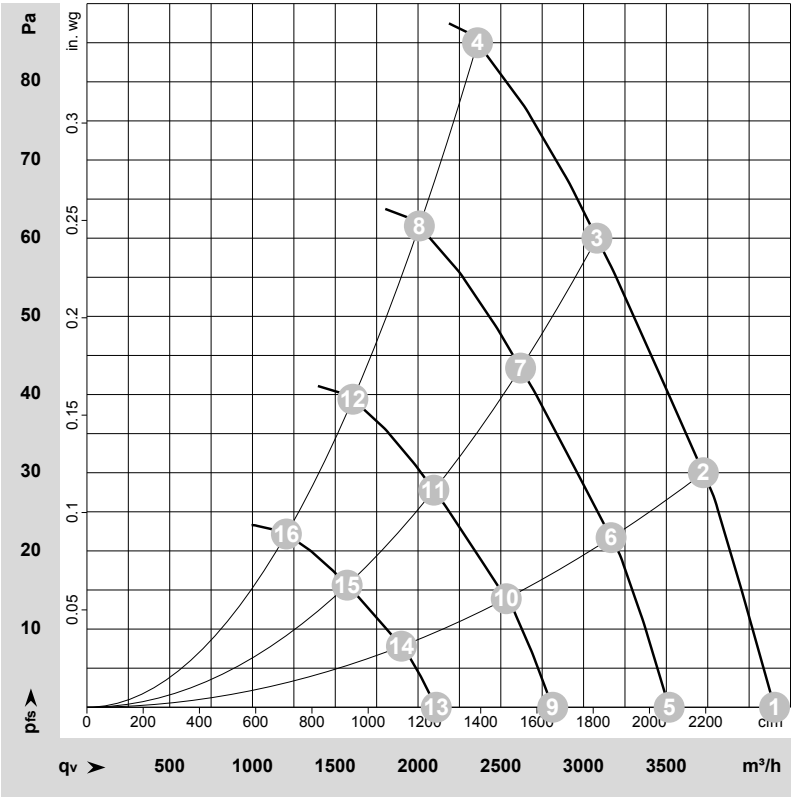

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-229403-1
Date: 2023-10-31
Housing: 18930-2-4037

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	LpA _{in}	LwA _{in}	q _v	P _{fs}	q _v	P _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m ³ /h	Pa	cfm	in. wg
1	1~	230	50	1180	128	1.10	63	70	4155	0	2445	0.00
2	1~	230	50	1175	144	1.23	62	69	3725	30	2190	0.12
3	1~	230	50	1175	154	1.30	57	64	3080	60	1815	0.24
4	1~	230	50	1175	166	1.40	59	67	2360	85	1390	0.34
5	1~	230	50	1000	78	0.67	59	66	3515	0	2070	0.00
6	1~	230	50	1000	89	0.75	58	64	3165	22	1865	0.09
7	1~	230	50	1000	94	0.80	53	60	2620	43	1540	0.17
8	1~	230	50	1000	102	0.86	55	63	2010	62	1180	0.25
9	1~	230	50	800	40	0.34	53	60	2815	0	1655	0.00
10	1~	230	50	800	45	0.39	52	59	2535	14	1490	0.06
11	1~	230	50	800	48	0.41	48	55	2095	28	1235	0.11
12	1~	230	50	800	52	0.44	50	57	1605	39	945	0.16
13	1~	230	50	600	17	0.14	46	53	2110	0	1240	0.00
14	1~	230	50	600	19	0.16	45	52	1900	8	1120	0.03
15	1~	230	50	600	20	0.17	40	47	1570	16	925	0.06
16	1~	230	50	600	22	0.19	43	50	1205	22	710	0.09

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
q_v = Air flow · P_{fs} = Pressure increase