

8300101554

VVY0500NSNFS

# EC axial panel fan - AxiTone

sickle-shaped blades (S series)

## ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

## Nominal data

Item	8300101554	
Motor	E07432-29	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		ml
Status		prelim.
Speed (rpm)	min <sup>-1</sup>	680
Power consumption	W	85
Current draw	A	0.7
Max. back pressure	Pa	40
Max. back pressure	in. wg	0.16
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment

Subject to change

8300101554  
VVY0500NSNFS

# EC axial panel fan - AxiTone

sickle-shaped blades (S series)

## Technical description


Size	500 mm
Motor size	74
Rotor surface	Thick-film passivated
Electronics housing material	Die-cast aluminum
Impeller material	PP plastic
Number of blades	3
Airflow direction	V
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing
Technical features	<ul style="list-style-type: none"><li>- Output 10 VDC, max. 1.1 mA</li><li>- Locked-rotor detection</li><li>- Tach output</li><li>- Speed control</li><li>- Power limiter</li><li>- Motor current limitation</li><li>- Soft start</li><li>- Control input 0-10 VDC / PWM</li><li>- Control interface with SELV potential safely disconnected from the mains</li><li>- Overvoltage detection</li><li>- Thermal overload protection for electronics/motor</li><li>- Line undervoltage detection</li></ul>
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Electronic motor protection
With cable	Variable
Protection class assignment	I; If a protective earth is connected. The built-in component has several local protection class assignments. The final protection class is determined by the intended installation.
Conformity with standards	EN 60335-1; EN 60034-1; EN 60204-1; CE; UKCA
Comment on CE	Ecodesign Directive 2009/125/EC + Fan Directive (EC) No. 327/2011 does not apply, as power consumption <125W.

8300101554  
 VVY0500NSNFS

# EC axial panel fan - AxiTone

sickle-shaped blades (S series)

## Product drawing

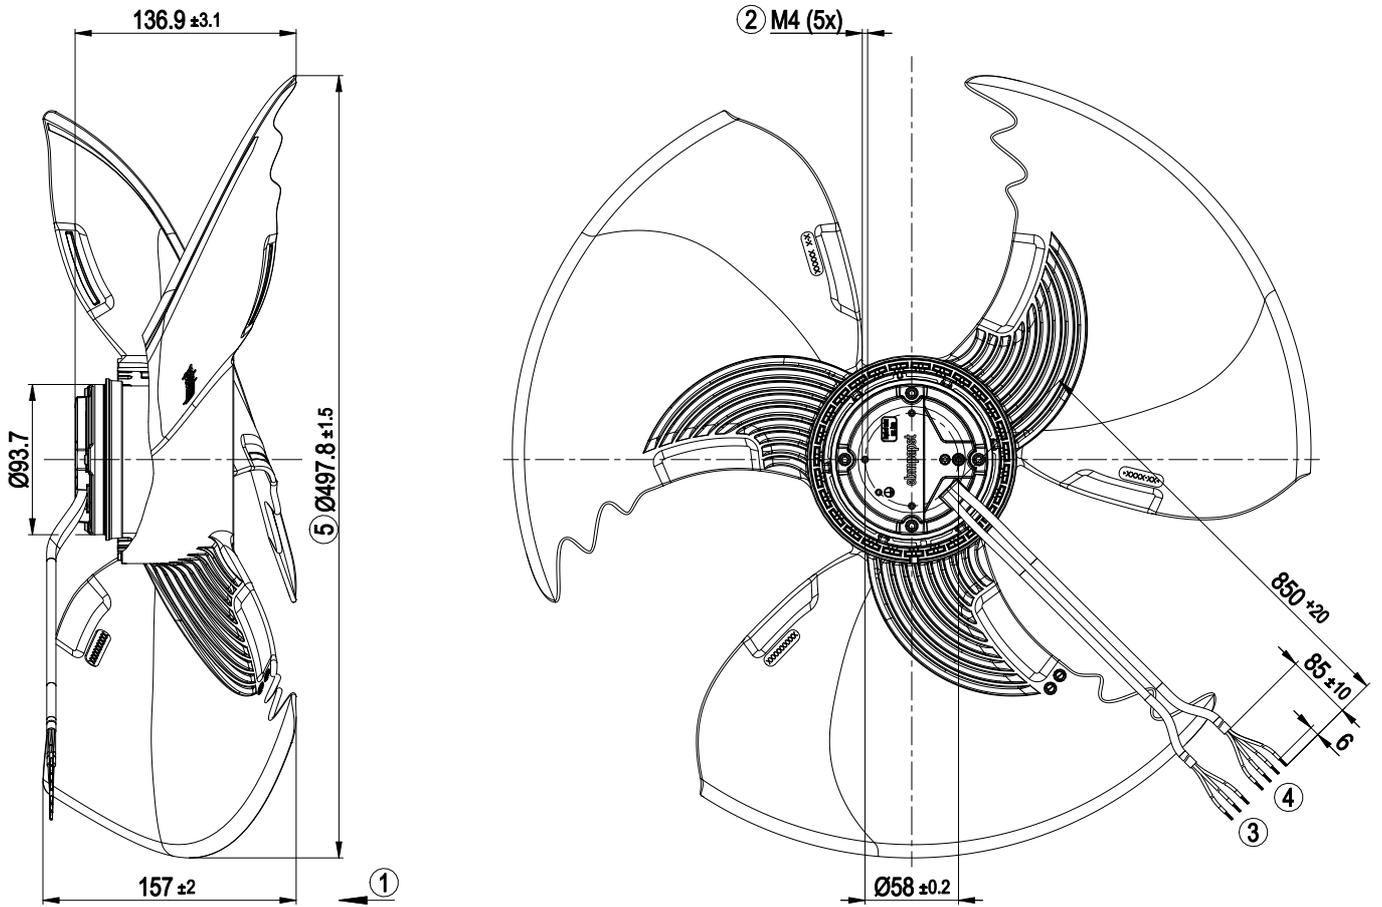

1	Airflow direction "V"
2	Max. clearance for screw 5 mm
3	Supply line (PWR) PVC AWG20 3x splice
4	Control wire (CTRL) PVC AWG22 4x splice
5	The diameter of the impeller becomes larger than indicated on the drawing due to the centrifugal forces during operation. The dimension indicated refers to the condition on delivery.


8300101554

VVY0500NSNFS

# EC axial panel fan - AxiTone

sickle-shaped blades (S series)

## Connection diagram

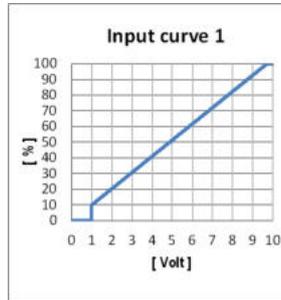

No.	Conn.	Designation	Color	Function/assignment
	PWR	L	black	Power supply, phase, see nameplate for voltage range
	PWR	N	blue	Power supply, neutral conductor, see nameplate for voltage range
	PWR	PE	green/yellow	Protective earth
	CTRL	GND	blue	Reference ground for control interface, SELV
	CTRL	IO1	yellow	Factory setting: Analog input 0-10 V/PWM, Ri=100 KΩ, fPWM=1 kHz..10 kHz, Function: Speed set value Characteristic curve parameterizable (see "Input curve 1"), SELV Function parameterizable at the factory (see Optional interface functions table)
	CTRL	IO2	white	Factory setting: Open collector output, Umax=50 VDC, Imax= 10 mA, function: Tach output 1 pulse/revolution, SELV Function parameterizable at factory (see table Optional interface functions)
	CTRL	Vout	red	Voltage output 10 VDC +/-3%, Imax=1.1 mA Not short-circuit-proof, power supply for external devices, SELV

## Terminal/plug assignment

	INPUT	OUTPUT	
source: set value	<input type="checkbox"/>		
switch: parameter set: #1 / #2	<input type="checkbox"/>		
switch: direction of rotation: cw / ccw	<input type="checkbox"/>		
switch: enable/disable input	<input type="checkbox"/>		
configurable function	<input type="checkbox"/>		
signal: tach out		<input type="checkbox"/>	
signal: diagnostics out		<input type="checkbox"/>	
signal: alarm out		<input type="checkbox"/>	
signal: run monitoring		<input type="checkbox"/>	
signal: status		<input type="checkbox"/>	
signal: configurable function		<input type="checkbox"/>	


  

	configurable IO mode	electrical specification
IO1	◦ Din1 (high active): digital input	active: parameterizable voltage x -30 VDC not active: pin open or parameterizable voltage < x VDC, SELV
	◦ Ain1 0-10 V/PWM: analog input	Ri = 100 kΩ, characteristic curve parameterizable, f <sub>PWM</sub> = 1 k - 10 kHz, SELV
IO2	◦ Tach out (open collector)	U <sub>max</sub> = 50 VDC, I <sub>max</sub> = 10 mA, SELV
	◦ Diagnostics out (open collector)	U <sub>max</sub> = 50 VDC, I <sub>max</sub> = 10 mA, SELV
	◦ Alarm out (open collector)	U <sub>max</sub> = 50 VDC, I <sub>max</sub> = 10 mA, SELV
Vout	◦ Open collector	U <sub>max</sub> = 50 VDC, I <sub>max</sub> = 10 mA, SELV
	Voltage output	Voltage 10 VDC, SELV

**Basic (B4)**  
Factory configuration option upon request

◦ factory configuration option

## Curves: Air performance 50 Hz

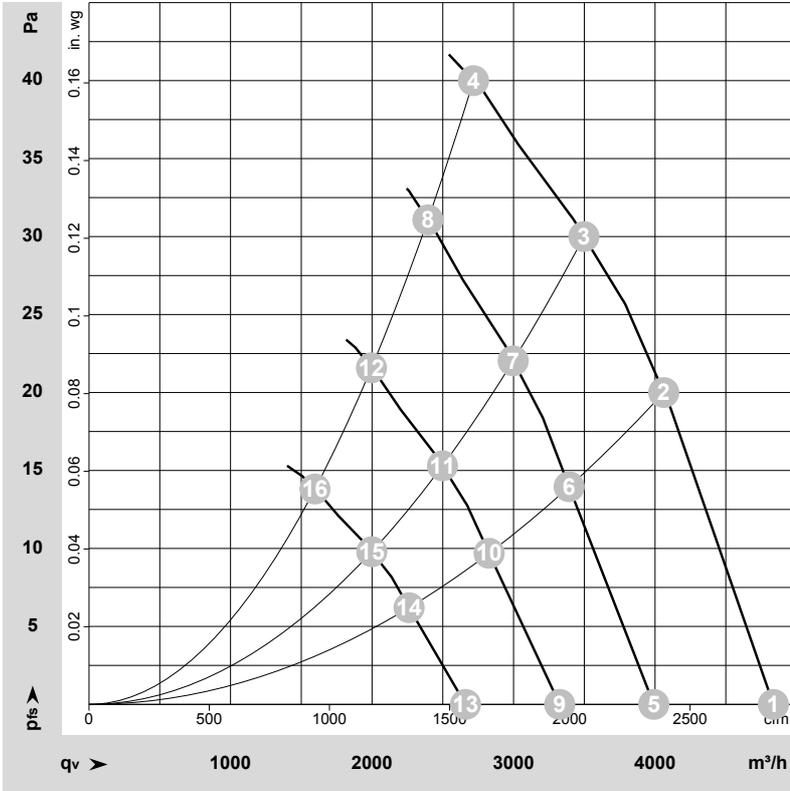

$\rho = 1.178 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-230022-1  
Date: 2023-12-15  
Housing: 10501-2-4037

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

	Wired	U	f	n	P <sub>e</sub>	I	LpA <sub>in</sub>	LwA <sub>in</sub>	LwA <sub>out</sub>	LwA	q <sub>v</sub>	P <sub>fs</sub>	q <sub>v</sub>	P <sub>fs</sub>
		V	Hz	min <sup>-1</sup>	W	A	dB(A)	dB(A)	dB(A)	dB	m <sup>3</sup> /h	Pa	cfm	in. wg
1	1~	230	50	725	73	0.60	49	55	54	58	4835	0	2845	0.00
2	1~	230	50	720	84	0.69	44	51	51	54	4060	20	2390	0.08
3	1~	230	50	700	84	0.69	41	49	48	51	3495	30	2060	0.12
4	1~	230	50	680	84	0.69	41	48	48	51	2715	40	1600	0.16
5	1~	230	50	600	41	0.34	44	51	49	53	3990	0	2350	0.00
6	1~	230	50	600	49	0.40	40	47	46	49	3395	14	1995	0.06
7	1~	230	50	600	53	0.43	38	45	44	47	2995	22	1765	0.09
8	1~	230	50	600	58	0.47	38	45	44	48	2395	31	1410	0.12
9	1~	230	50	500	24	0.20	40	46	44	48	3325	0	1960	0.00
10	1~	230	50	500	28	0.23	35	42	41	45	2825	10	1665	0.04
11	1~	230	50	500	31	0.25	33	40	39	43	2500	15	1470	0.06
12	1~	230	50	500	33	0.27	33	41	40	43	1995	22	1175	0.09
13	1~	230	50	400	12	0.10	34	40	39	43	2660	0	1565	0.00
14	1~	230	50	400	15	0.12	30	37	36	39	2260	6	1330	0.02
15	1~	230	50	400	16	0.13	27	34	34	37	2000	10	1175	0.04
16	1~	230	50	400	17	0.14	28	35	34	38	1595	14	940	0.06

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
LwA<sub>out</sub> = Sound power level outlet side · q<sub>v</sub> = Air flow · P<sub>fs</sub> = Pressure increase