



8314/17T

Customer specification: No
Version: 0.0
Created: 00.00.0000

8314/17T (9694350203) ebmpapst Datasheet FansCo
sales@fansco.com
www.fansco.com

INDEX

1 General 2

2 Mechanics 2

 2.1 GENERAL 2

 2.2 MOTOR 2

 2.3 CONNECTIONS 2

3 Operating Data 3

 3.1 OPERATING DATA - ELECTRICAL INTERFACE - INPUT 3

 3.2 ELECTRICAL OPERATING DATA 4

 3.3 OPERATING DATA - ELECTRICAL INTERFACE - OUTPUT 5

 3.4 ELECTRICAL FEATURES 6

 3.5 AERODYNAMICS 7

 3.6 SOUND DATA 8

4 Environment 8

 4.1 GENERAL 8

 4.2 CLIMATIC REQUIREMENTS*) 8

 4.3 MECHANICAL REQUIREMENTS 9

5 Safety 9

 5.1 ELECTRICAL SAFETY 9

 5.2 APPROVAL TESTS 9

6 Reliability 9

7 Drawing 10

Special features according to QMH 2-5.4.7 and company standard 1-23.00 have the following definitions:

"A" : Product features or process parameters which influence the safety of a product or the compliance of legal requirements. (Must not necessary verified and documented 100%. Standards and legal requirements must be considered.)

"FK" : Product features or process parameters which influence the fit and function of a product or which have to be controlled or documented for some other reasons (e.g. Customer requirements).



1 General

Fan type	Fan	
Rotating direction looking at rotor	Clockwise	FK
Airflow direction	Air outlet over struts	FK
Bearing system	Ball bearing	
Lubrication	see sectional drawing of the bearing	
Mounting position	Any	
Tolerance		
Balancing grade	6,3	FK
Impeller weight	82,0 g	

2 Mechanics

2.1 General


Width	80,0 mm	
Height	80,0 mm	
Depth	32,0 mm	
Diameter	0,0 mm	
Mass	0,170 kg	
Housing material	Plastic	
Impeller material	Plastic	
Max. torque when mounted across both mounting flanges	wire outlet corner: 20 Ncm remaining corners: 30 Ncm	
Screw size	ISO 4762 - M4 degreased, without an additional brace and without washer	

2.2 Motor

Type of motor	Electronically commutated external rotor	
Diameter of the motor	43,0 mm	
Height of the motor	3,0 mm	
Number of phases	1	
Number of windings	2	
Operating mode	Continuous duty	
Insulation material class	E	

2.3 Connections

Electrical connection	Wires	
Lead wire length	L = 310 mm	
Tolerance	+ - 10,0 mm	
Tube length	See drawing	
Tolerance		
Wire size (AWG)	24	
Insulation diameter	1,55 mm	
Plug	See drawing	
Contact	See drawing	

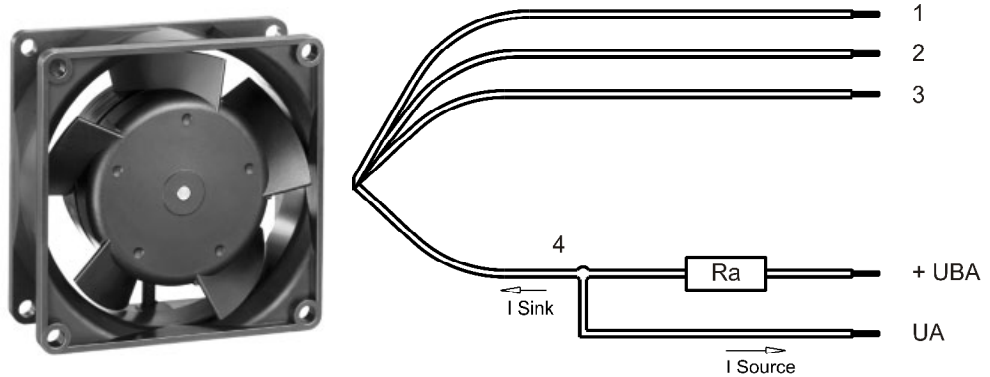

	Colour	Operation
Wire 1	red	+ UB
Wire 2	blue	- GND
Wire 3	violet	NTC
Wire 4	white	Alarm


The auxiliaries shown on the schematic diagram (which are required for the intended use) are not part of our delivery.


3 Operating Data

3.1 Operating Data - Electrical Interface - Input

Control input	cExternal Temperature Sensor
---------------	------------------------------

Features

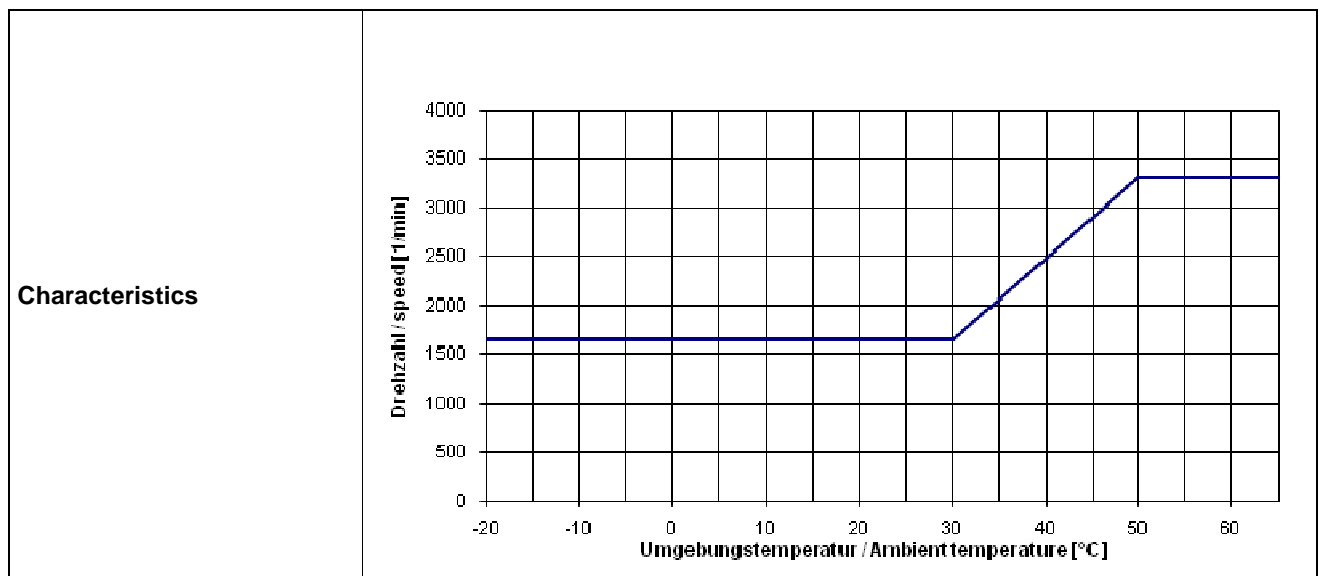

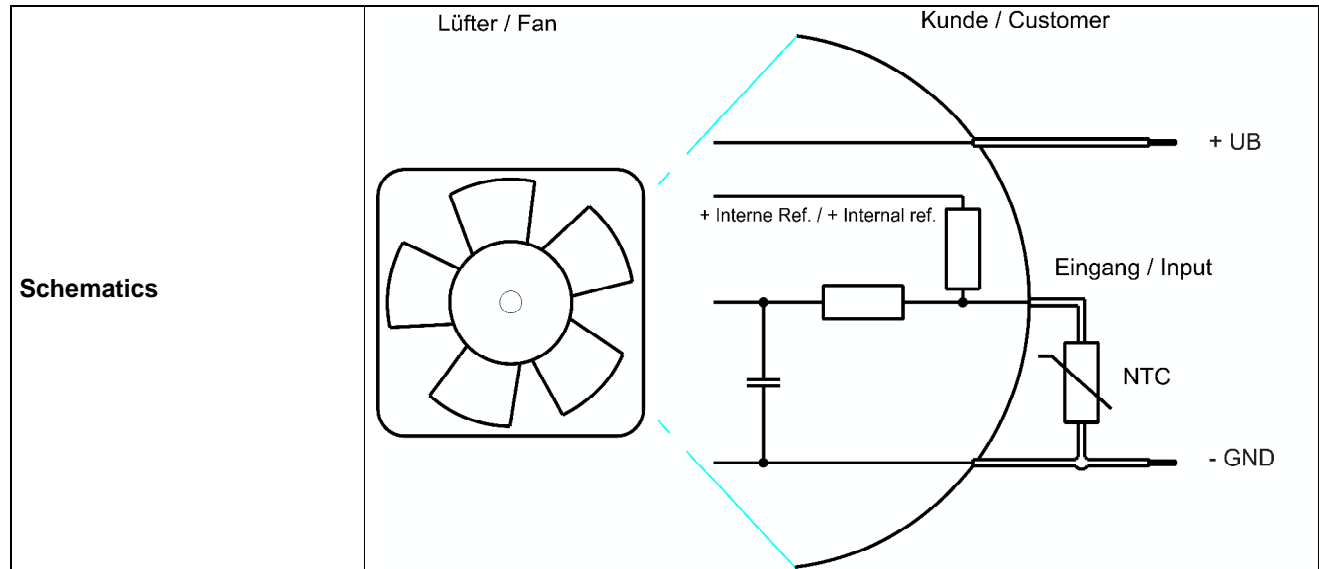

3.2 Electrical Operating Data

Measurement conditions: Normal air density = 1,2 kg/m³; Temperature 23°C +/- 3°C; Motor axis horizontal; warm-up time before measuring 5 minutes (unless otherwise specified). In the intake and outlet area should not be any solid obstruction within 0,5 m.

$\Delta p = 0$: corresp. to free air flow (see section 3.5)

I: corresp. to arithm. mean current value

Name	Condition
TU 0001	TU: > 50 °C
NTC 0001	NTC <= 25 kOhm

Features	Condition	Symbol	Values		
Voltage range	$\Delta p = 0$	U	20,0 V		27,0 V
Nominal voltage	$\Delta p = 0$	U_N		24,0 V	
Power consumption	$\Delta p = 0$	P	1,9 W +/- 25,0 %	2,5 W +/- 25,0 %	2,4 W +/- 25,0 %
Tolerance	TU / NTC 0001				
Current consumption	$\Delta p = 0$	I	95 mA +/- 25,0 %	105 mA*) +/- 25,0 %	90 mA +/- 25,0 %
Tolerance	TU / NTC 0001				
Speed	$\Delta p = 0$	n	2.800 1/min +/- 12,5 %	3.300 1/min*) +/- 7,5 %	3.300 1/min +/- 7,5 %
Tolerance	TU / NTC 0001				
Starting current consumption				500 mA	

Name	Condition		
TU 0002	TU: < 30 °C		
NTC 0002	NTC >= 100 kOhm		

Features	Condition	Symbol	Values		
Voltage range	$\Delta p = 0$	U	20,0 V		27,0 V
Nominal voltage	$\Delta p = 0$	U_N		24,0 V	
Power consumption	$\Delta p = 0$	P	0,8 W +/- 25,0 %	0,95 W +/- 25,0 %	1,1 W +/- 25,0 %
Tolerance	TU / NTC 0002				
Current consumption	$\Delta p = 0$	I	40 mA +/- 25,0 %	40 mA*) +/- 25,0 %	40 mA +/- 25,0 %
Tolerance	TU / NTC 0002				
Speed	$\Delta p = 0$	n	1.650 1/min **)	1.650 1/min*) **)	1.650 1/min **)
Tolerance	TU / NTC 0002				


*) Attention: Marked values are "FK" features

***) **Vario Pro:** Unless otherwise specified in the table a general fan speed tolerance applies, relating to the maximum value of the required characteristic curve. Tolerance: +/- 7,5 %

3.3 Operating Data - Electrical Interface - Output

Tacho type	None
------------	------

Alarm type	/17 (high = ok, open collector)
------------	---------------------------------

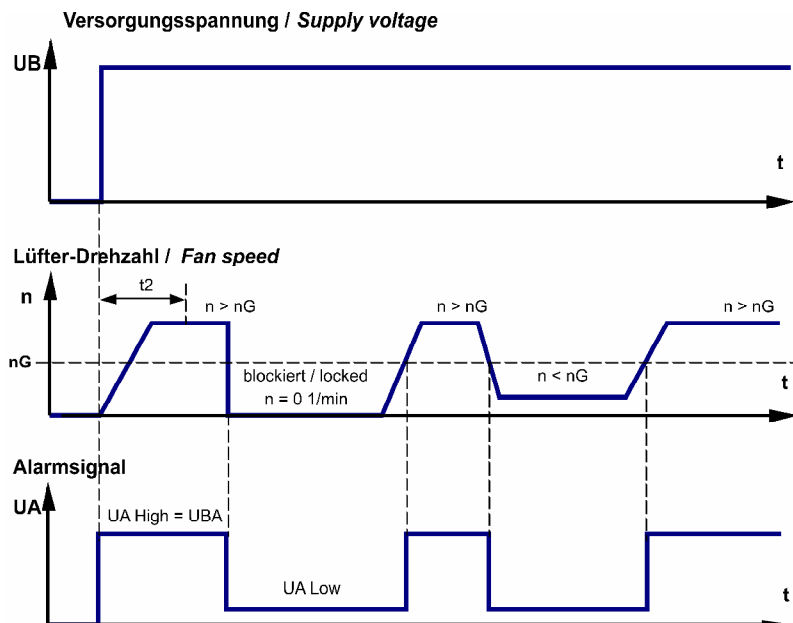


$$R_a = \frac{U_{BA} - U_{A \text{ Low}}}{I_{\text{Sink}}}$$

Features	Note	Values
Alarm operating voltage (UBA)		≤ 60 V
Alarm signal Low *)	I sink: 2 mA	$\leq 0,4$ V
Alarm signal High *)	I source: 0 mA	60 V
Maximum sink current		20 mA
External resistor	External resistor Ra from UBA to UA required. All voltage measured to GND.	
Alarm start-up delay time (t2)		≤ 15 s
Alarm trip speed limit (nG)		1.250 1/min +/- 100 1/min
Tolerance		
Alarm* at sense failure	No	
Alarm latch	No	
Alarm isolated from motor	No	

*) Attention: Marked values are "FK" features

3.4 Electrical Features

Electronic function	Speed-Controlled	
Reversed polarity protection	Rectifying diode	A
Max. residual current at Un	IF ≤ 30 mA	
Locked rotor protection	Auto restart	A
Locked rotor current at Un	approx. 500 mA	
Clock signal t3/t4 at locked rotor	Typical: 0,6 s / 10 s	

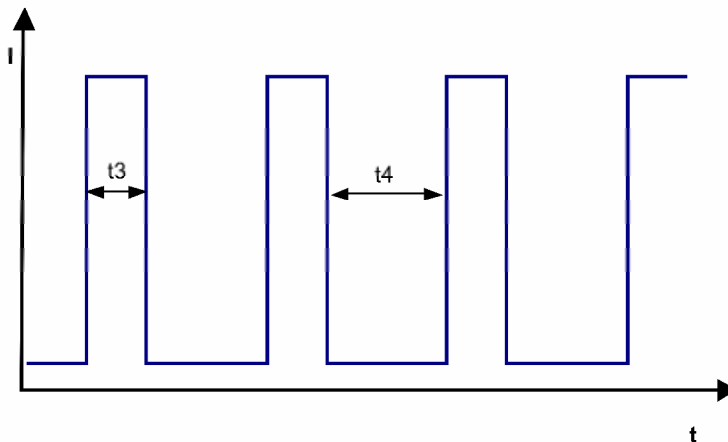




3.5 Aerodynamics

Measurement conditions: Measured with a double chamber intake rig acc. to DIN EN ISO 5801.
 Normal air density = 1,2 kg/m³; Temperature 23°C +/- 3°C;
 In the intake and outlet area should not be any solid obstruction within 0,5 m.
 The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions.

a.) Operation condition:

3.300 1/min at free air flow	TU > 50 °C NTC <= 25 kOhm		
------------------------------	------------------------------	--	--

Max. free-air flow ($\Delta p = 0 / \dot{V} = \text{max.}$)	52,0 m ³ /h	FK
Max. static pressure ($\Delta p = \text{max.} / \dot{V} = 0$)	60 Pa	FK

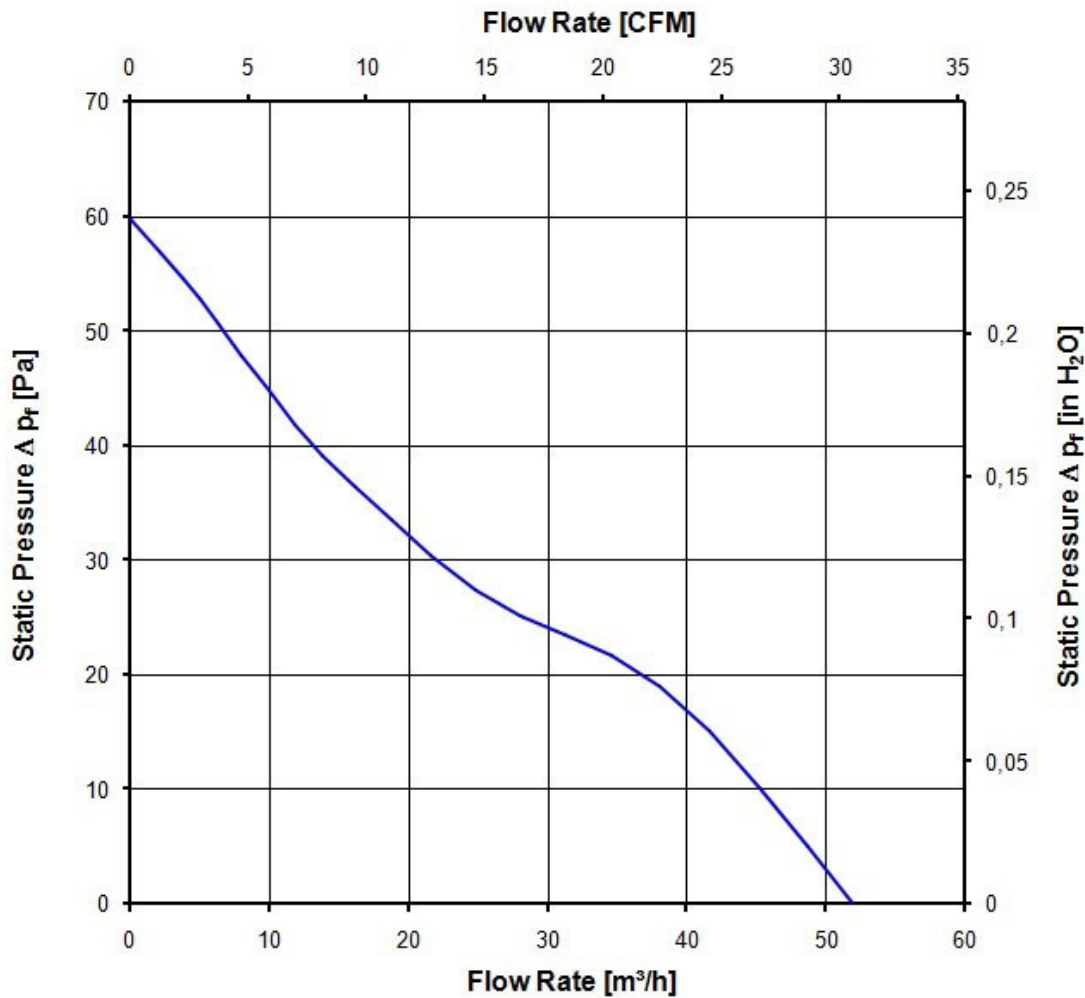



3.6 Sound Data

Measurement conditions: Sound pressure level: 1 Meter distance between microphone and the air intake.
Sound power level: Acc. to DIN 45635 part 38 (ISO 10302)
Measured in a semianchoic chamber with a background noise level of $L_p(A) < 5 \text{ dB(A)}$
For further measurement conditions see section 3.5

a.) Operation condition:

3.300 1/min at free air flow	TU > 50 °C NTC <= 25 kOhm		
------------------------------	------------------------------	--	--

Optimal operating point	41,0 m3/h @ 14 Pa	
Sound power level at the optimal operating point	5,1 bel(A)	
Sound pressure level at free air flow, measured in rubber bands	35,0 dB(A)	

4 Environment

4.1 General

Min. permitted ambient temperature TU min.	-20 °C	
Max. permitted ambient temperature TU max.	65 °C	
Min. permitted storage temperature TL min.	-40 °C	
Max. permitted storage temperature TL max.	80 °C	

4.2 Climatic Requirements*)

Humidity requirements	humid heat, constant; according to DIN EN 60068-2-78, 14 days	
Water exposure	None	
Radiation exposure	None	
Dust requirements	None	
Salt fog requirements	None	
Harmful gas requirements	None	

*) Permitted application area:

The product is intended for use in sheltered rooms with controlled temperature and controlled humidity. Directly exposure to water must be avoided.

Pollution degree 1 (according DIN EN 60664-1)

There is either no pollution or it occurs only dry, non-conductive pollution. The pollution has no negative impact.



4.3 Mechanical Requirements

Please require severity levels and specification parameters from the responsible development departments

5 Safety

5.1 Electrical Safety

Dielectric strength DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700) A.) Type test Measuring conditions: After 48h of storage at 95% R.H. and 25°C. No arcing or breakdown is allowed! All connections together to ground. B.) Routine test Measuring conditions: At indoor climate. No arcing or breakdown is allowed! All connections together to ground.	500 VAC / 1 Min. 500 VAC / 1 Sec.	A
Isolation resistance Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min.	RI > 10 MOhm	
clearance / creepage distance	1,0 mm / 1,2 mm	
Protection class	III	


5.2 Approval Tests

CE	EC Declaration of Conformity	Yes
EAC	Eurasian Conformity	Yes
UL	Underwriters Laboratories	Yes / UL507, Electric Fans
VDE	Association for Electrical, Electronic and Information Technologies	No
CSA	Canadian Standards Association	Yes / C22.2 No. 113 Fans and Ventilators
CCC	China Compulsory Certification	Yes / GB 12350 Safety Requirements for small Power Motors

6 Reliability

Life expectancy L10 at TU = 40 °C	70.000 h	
Life expectancy L10 at TU max.	27.500 h	
Life expectancy L10 Delta (40 °C)	140.000 h	

7 Drawing

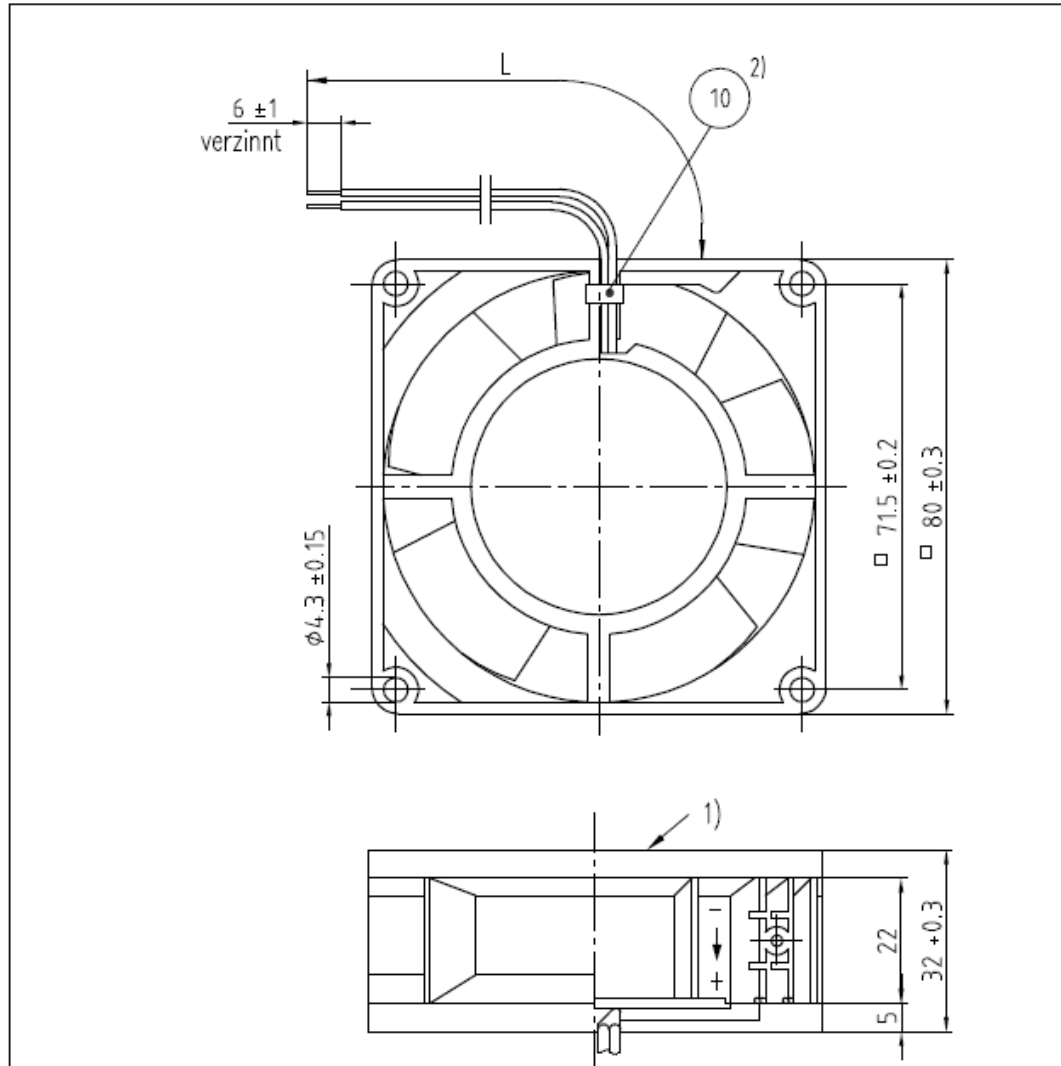

1) Rotorüberstand bis max. 0.4 mm zulässig.

2) wenn in Stückliste enthalten

Anzahl und Länge der Litze siehe Bv.-Bl. 1

Axialspiel bei

- Kugellagerung (K): 0 (mit Federausgleich)
- Gleitlagerung (G): 0.1 – 0.6

Tolerierung/Tolerances: DIN 7167 Allgemeine Toleranzen/Gen. Tolerances: DIN 7167 Längenauswahl: DIN ISO 2768-cL Winkel, Form u. Lage:			
AutoCAD 2006 Datum/Date: Name/Name:		Artikel/Title Axiallüfter	Maßstab/scale 2:1
Bearb./Drawn:			
Index/Index: Aend.-Nr./Change-No.:		Zchg.-Nr./Dwg.-No.: 9294305306	Blatt/Page 002
Bearb. u. zur Verwendung freigegeben/Drafted for release von/by: am/on:			
ebmpapst ebm-papst St. Georgen GmbH & Co. KG		Ers.f.Zchg./Replaces:	A4