

R3G500-8317081581  
8317081581

# EC centrifugal fan - RadiCal

backward-curved, single-intake

ebm-papst Ventilator (Shanghai) Co.,Ltd.

No.418, Hua Jing Road, Pilot Free Trade Zone, Pudong District

Shanghai, China, 200131

8317081581 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

## Nominal data

Type	R3G500-8317081581	
Motor	M3G150-FF	
Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Method of obtaining data		ml
Status		prelim.
Speed (rpm)	min <sup>-1</sup>	1900
Power consumption	W	2850
Current draw	A	4.4
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	40

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change



R3G500-8317081581  
8317081581

# EC centrifugal fan - RadiCal

backward-curved, single-intake

## Technical description

Size	500 mm
Motor size	150
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum
Impeller material	PP plastic
Number of blades	6
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP55
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H1
Ambient temperature note	Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings.
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	<ul style="list-style-type: none"><li>- Operation and alarm display with LED</li><li>- External 15-50 VDC input (parameterization)</li><li>- Alarm relay</li><li>- Integrated PI controller</li><li>- Configurable inputs/outputs (I/O)</li><li>- MODBUS V6.0</li><li>- Motor current limitation</li><li>- RFID - ISO 15693 compatible</li><li>- RS-485 MODBUS-RTU</li><li>- Soft start</li><li>- Voltage output 3.3-24 VDC, Pmax = 800 mW</li><li>- Control interface with SELV potential safely disconnected from the mains</li><li>- Thermal overload protection for electronics/motor</li><li>- Line undervoltage / phase failure detection</li></ul>
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC interference emission	According to EN 61000-6-3 (household environment), except EN 61000-3-2 for professionally used equipment with a total rated power greater than 1 kW
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Terminal box
Motor protection	Reverse polarity and locked-rotor protection
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 61800-5-1; CE
Approval	CSA C22.2 No. 77 + CAN/CSA-E60730-1; UL 1004-7 + 60730-1




R3G500-8317081581  
8317081581

# EC centrifugal fan - RadiCal


backward-curved, single-intake

## Product drawing

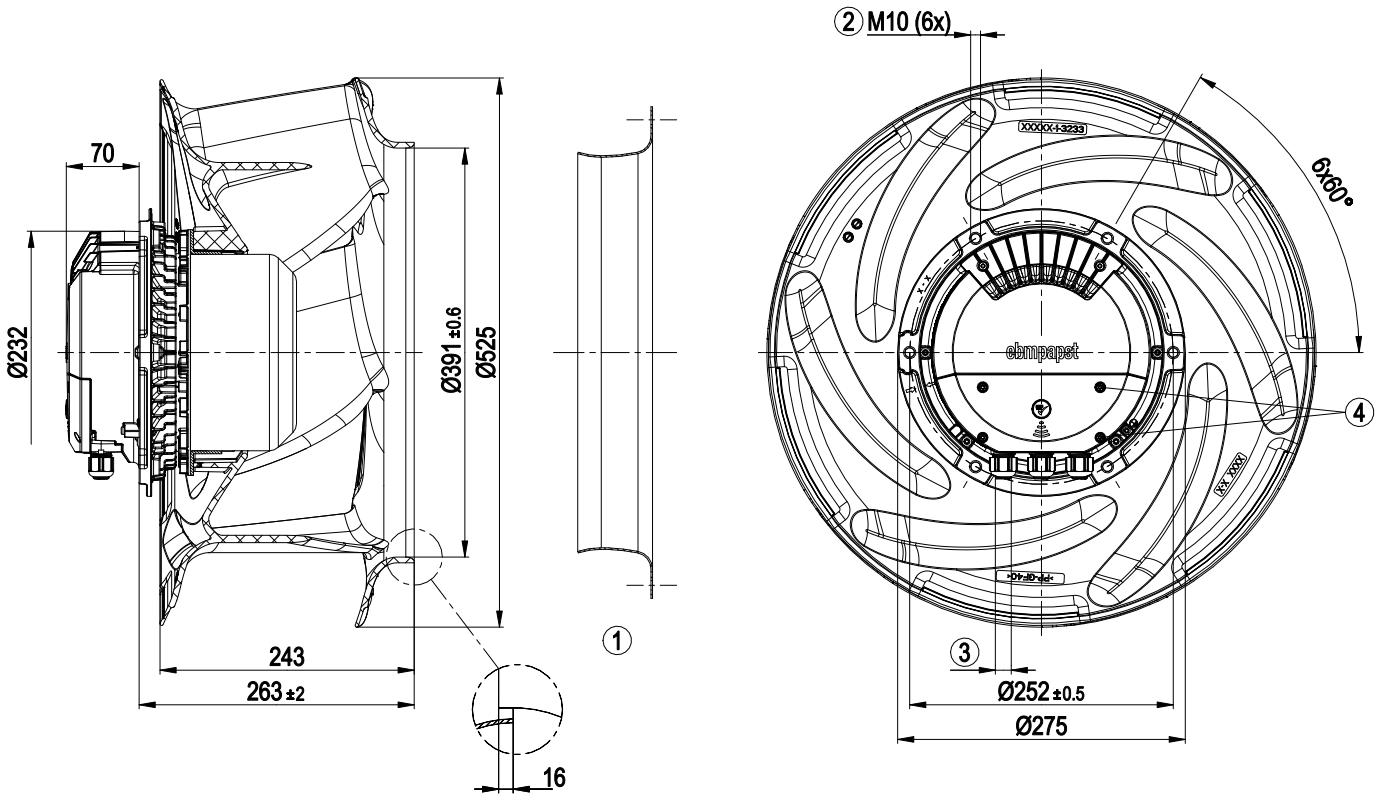


1	Accessory part: Inlet ring 50350-2-4013 not included in scope of delivery
2	Max. clearance for screw 20 mm
3	Cable diameter min. 4 mm, max. 10 mm, tightening torque $4 \pm 0.6$ Nm
4	Tightening torque $1.5 \pm 0.2$ Nm

## Accessory part

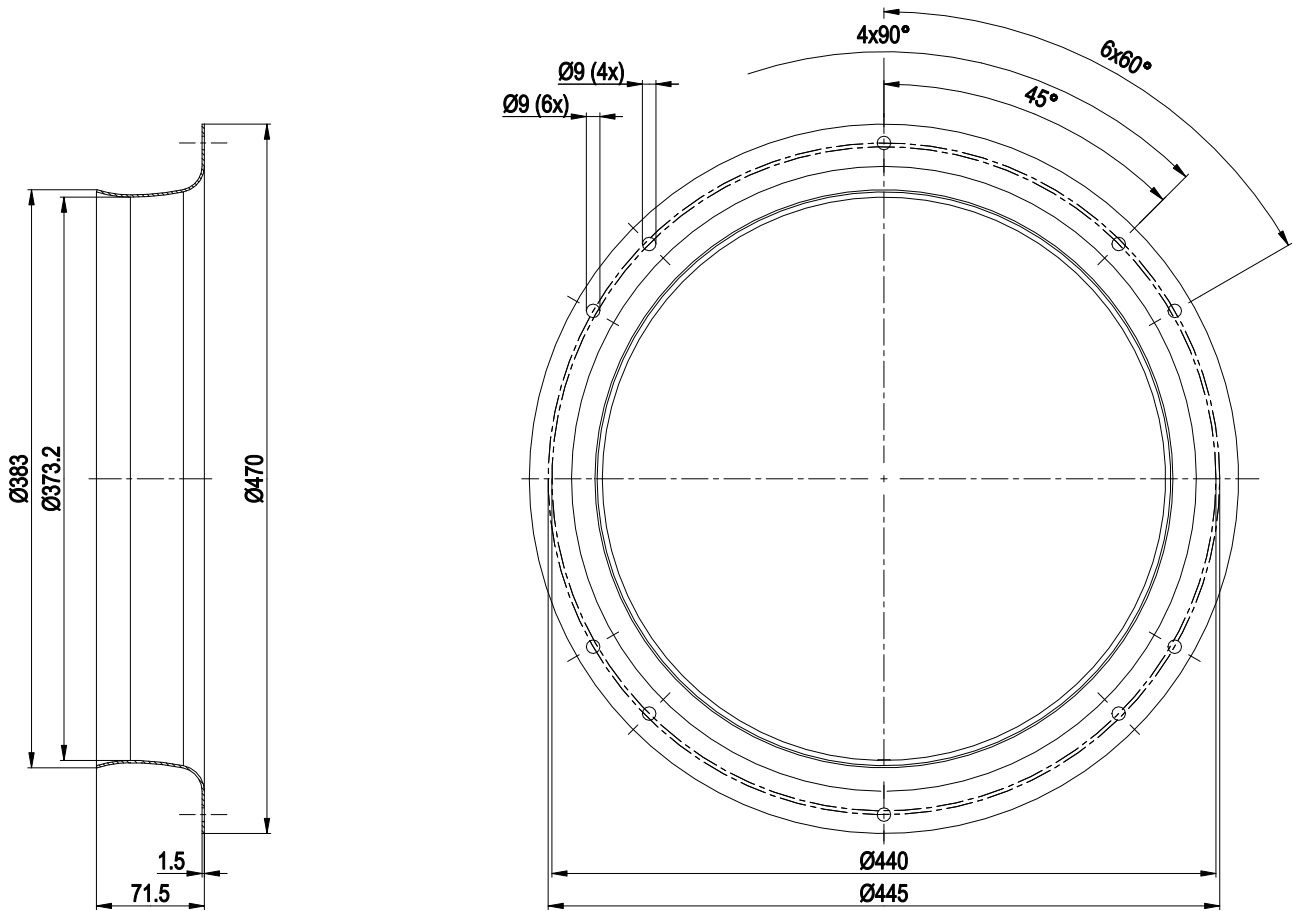

Inlet ring 50350-2-4013 (the PN of inlet ring with pressure tap is 50355-2-4013, k-factor: 375)

## Connection diagram

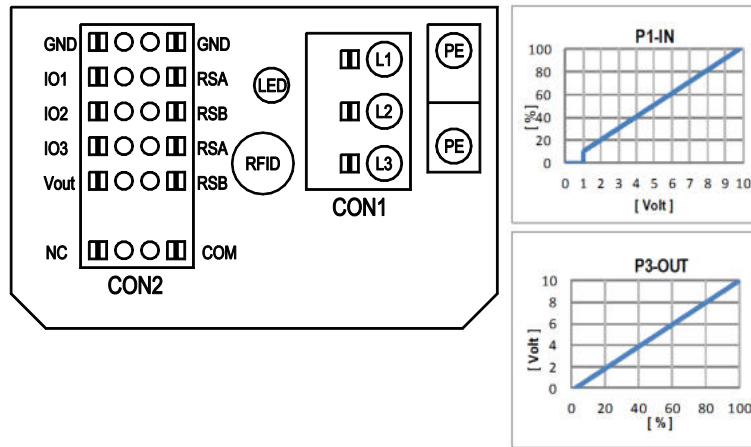

No.	Conn.	Designation	Function/assignment
	CON1	L1, L2, L3	Power supply, phase, see nameplate for voltage range
	PE	PE	Protective earth
	CON2	RSA	RS485 interface for MODBUS, RSA; SELV
	CON2	RSB	RS485 interface for MODBUS, RSB; SELV
	CON2	GND	Reference ground for control interface, SELV
	CON2	IO1	Function parameterizable (see "Optional interface functions" table) Factory setting: Digital input - high active, function: Disable input, SELV - inactive: Pin open or applied voltage < 1.5 VDC - active: applied voltage 3.5-50 VDC Reset function: Triggering of error reset on change of state from "enabled" to "disabled"
	CON2	IO2	Function parameterizable (see "Optional interface functions" table) Factory setting: Analog input 0-10 V / PWM, Ri=100 kΩ, function: Set value Characteristic curve parameterizable (see input characteristic curve P1-IN), SELV
	CON2	IO3	Function parameterizable (see "Optional interface functions" table) Factory setting: Analog output 0-10 V, max. 5 mA, function: Fan modulation level Characteristic curve parameterizable (see output characteristic curve P3-OUT), SELV
	CON2	Vout	Voltage output 3.3-24 VDC ±5%, Pmax=800 mW, voltage parameterizable Factory setting: 10 VDC short-circuit-proof, supply for external devices, SELV alternatively: 15-50 VDC input for parameterization via MODBUS without line voltage
	CON2	COM	Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on supply side and on control interface side
	CON2	NC	Status relay, floating status contact, break for failure
		LED	green: status = good, ready for operation orange: status = warning red: status = failure
		P1-IN	Input characteristic curve
		P3-OUT	Output characteristic curve

## Terminal/plug assignment


CON2	configurable IO functions: normal / inverse	MODBUS Register for IO mode configuration	electrical specification	configurable IO mode	
				IO mode	configuration
101	○ Din1 (active high), digital input	D158 [0]	not active: pin open or applied voltage < 1.5VDC active: applied voltage 3.5-50VDC, SELV		
	○ Ain1 0-10V/PWM: analog input	D158 [2]	RI=100K, characteristic curve parameterizable, $f_{PWM}=1k..10kHz$ , SELV		
	○ Tacho out (open collector output)	D158 [5]	Umax=50VDC, Imax=20mA, SELV		
	○ Diagnostics out (open collector output)	D158 [6]	Umax=50VDC, Imax=20mA, SELV		
102	○ Din2 (active high), digital input	D159 [0]	not active: pin open or applied voltage < 1.5VDC active: applied voltage 3.5-50VDC, SELV		
	○ Ain2 0-10V/PWM: analog input	D159 [2]	RI=100K, characteristic curve parameterizable, $f_{PWM}=1k..10kHz$ , SELV		
	○ Ain2 4-20mA: analog input	D159 [3]	RI=125R, characteristic curve parameterizable, SELV		
	○ Din3 (active high), digital input	D15A [0]	not active: pin open or applied voltage < 1.5VDC active: applied voltage 3.5-50VDC, SELV		
103	○ Din3 (active low), digital input	D15A [1]	not active: pin open or applied voltage < 1.5VDC active: applied voltage 3.5-50VDC, SELV		
	○ PWMIn3: digital input	D15A [7]	not active: pin open or applied voltage < 1.5VDC, SELV 40Hz - 10kHz, characteristics parameterizable		
	○ Aout3 0-10V: analog output	D15A [4]	not active: pin open or applied voltage < 1.5VDC, SELV function parameterizable, max. 5mA, max output frequency 300Hz, SELV		
	○ Tacho out (pulses), analog output	D15A [5]	0-10V max. 5mA, max output frequency 300Hz, SELV		
RSA RSB	○ Diagnostics out (pulses)	D15A [6]	0-10V max. 5mA, max output frequency 300Hz, SELV		
	RS485 bus connection,		MODBUS RTU, specification V6.0, SELV		
Vout	voltage output	D16E [..]	voltage parameterizable 3.3...24VDC +/- 5.5%, Pmax=800mW, short-circuit-proof, supply for external devices, SELV		
	alternatively: input auxiliary power supply for parameterization via RS485/MODBUS RTU without line voltage		15...50VDC		

○ configurable option

For further information and additional functions see EC Control Software, Fan-Set-App, or MODBUS Parameter Specification V6.0



## Curves: Air performance 50 Hz

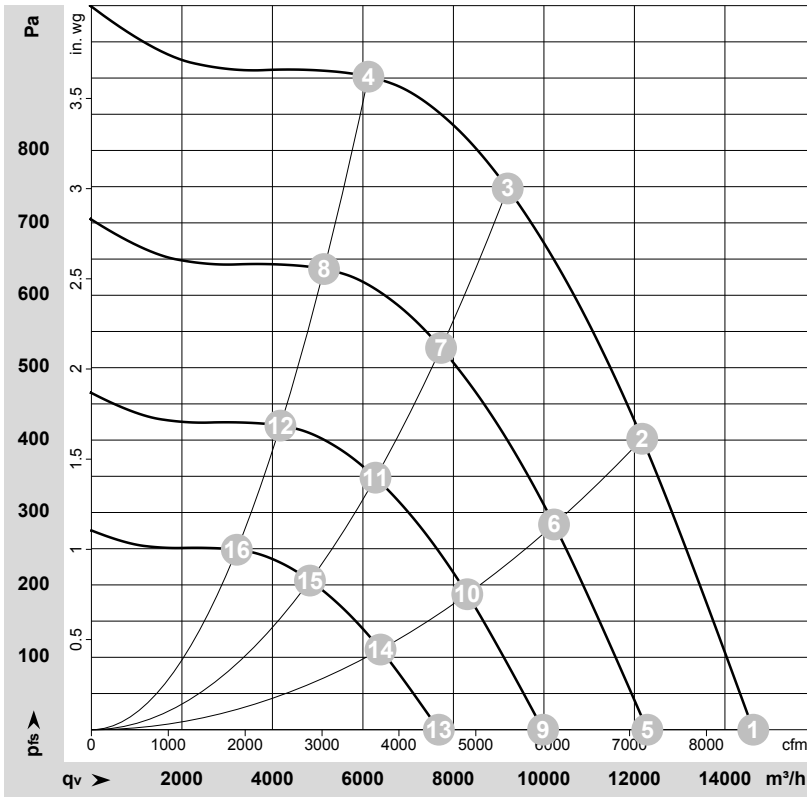

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: 13267

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Fan performance

	Wired	U	f	n	P <sub>ed</sub>	I	LpA <sub>in</sub>	LwA <sub>in</sub>	LwA <sub>out</sub>	q <sub>v</sub>	p <sub>fs</sub>	q <sub>v</sub>	p <sub>fs</sub>
		V	Hz	min <sup>-1</sup>	W	A	dB(A)	dB(A)	dB(A)	m <sup>3</sup> /h	Pa	cfm	in. wg
1	3~	400	50	1900	1648	2.61	82	89	92	14625	0	8610	0.00
2	3~	400	50	1900	2479	3.83	76	83	88	12170	400	7165	1.61
3	3~	400	50	1900	2850	4.40	71	78	85	9200	750	5415	3.01
4	3~	400	50	1900	2627	4.05	75	82	87	6120	900	3600	3.61
5	3~	400	50	1600	976	1.55	77	85	88	12285	0	7230	0.00
6	3~	400	50	1600	1469	2.27	71	78	84	10225	285	6015	1.14
7	3~	400	50	1600	1685	2.59	66	74	81	7725	528	4550	2.12
8	3~	400	50	1600	1557	2.40	71	78	83	5140	638	3025	2.56
9	3~	400	50	1300	524	0.83	72	79	83	9980	0	5875	0.00
10	3~	400	50	1300	788	1.22	66	73	79	8305	188	4890	0.75
11	3~	400	50	1300	904	1.39	61	69	76	6280	349	3695	1.40
12	3~	400	50	1300	835	1.29	65	73	78	4175	421	2460	1.69
13	3~	400	50	1000	238	0.38	65	73	76	7680	0	4520	0.00
14	3~	400	50	1000	359	0.55	60	67	72	6390	111	3760	0.45
15	3~	400	50	1000	411	0.63	54	62	69	4830	206	2840	0.83
16	3~	400	50	1000	380	0.59	59	66	71	3215	249	1890	1.00

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
LwA<sub>out</sub> = Sound power level outlet side · q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase