

**ebm-papst Mulfingen GmbH & Co. KG**

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Type	A3G300-AL11-03	
Motor	M3G055-DF	

Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60


Method of obtaining data		ml
Speed (rpm)	min ⁻¹	1560
Power consumption	W	97
Current draw	A	0.8
Max. back pressure	Pa	98
Max. back pressure	in. wg	0.39
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Technical description


Weight	1.8 kg
Size	300 mm
Motor size	55
Rotor surface	Passivated
Impeller material	PP-GF40 plastic
Airflow direction	V
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 10 mA - Tach output - Power limiter - Motor current limitation - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Overvoltage detection - Thermal overload protection for electronics/motor - Line undervoltage detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-3 (household environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Electronic motor protection
With cable	Variable
Protection class assignment	I; If a protective earth is connected. The built-in component has several local protection class assignments. The final protection class is determined by the intended installation.
Conformity with standards	EN 60335-1; CE
Comment on CE	Ecodesign Directive 2009/125/EC + Fan Directive (EC) No. 327/2011 does not apply, as power consumption <125W.
Approval	CSA C22.2 No. 77 + CAN/CSA-E60730-1; EAC; UL 1004-7 + 60730-1; CCC

Product drawing

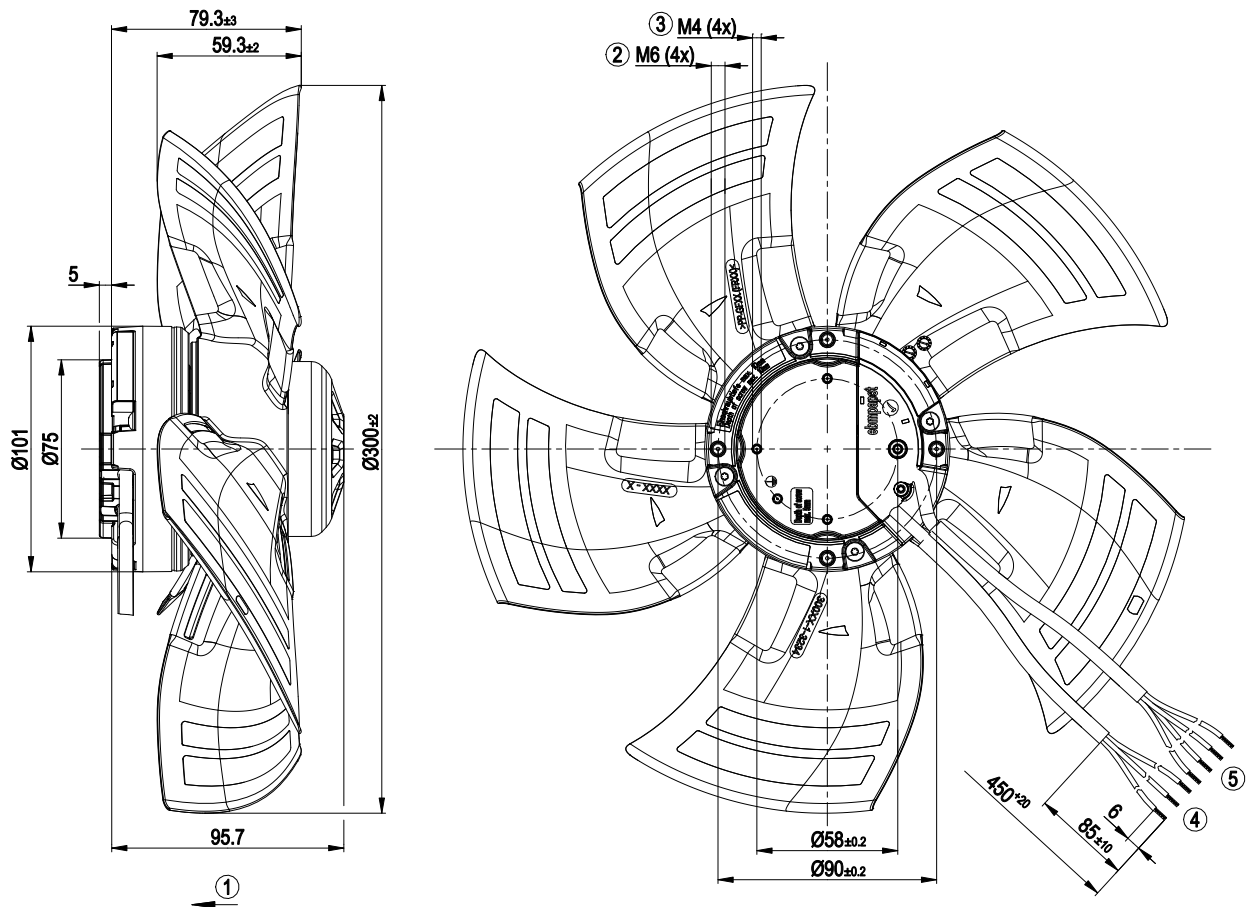


1	Direction of air flow "V"
2	Max. clearance for screw 10 mm
3	Max. clearance for screw 5 mm
4	Cable PVC 3G AWG20, 3x crimped splices
5	Cable PVC 4x AWG22, 4x crimped splices

Connection diagram

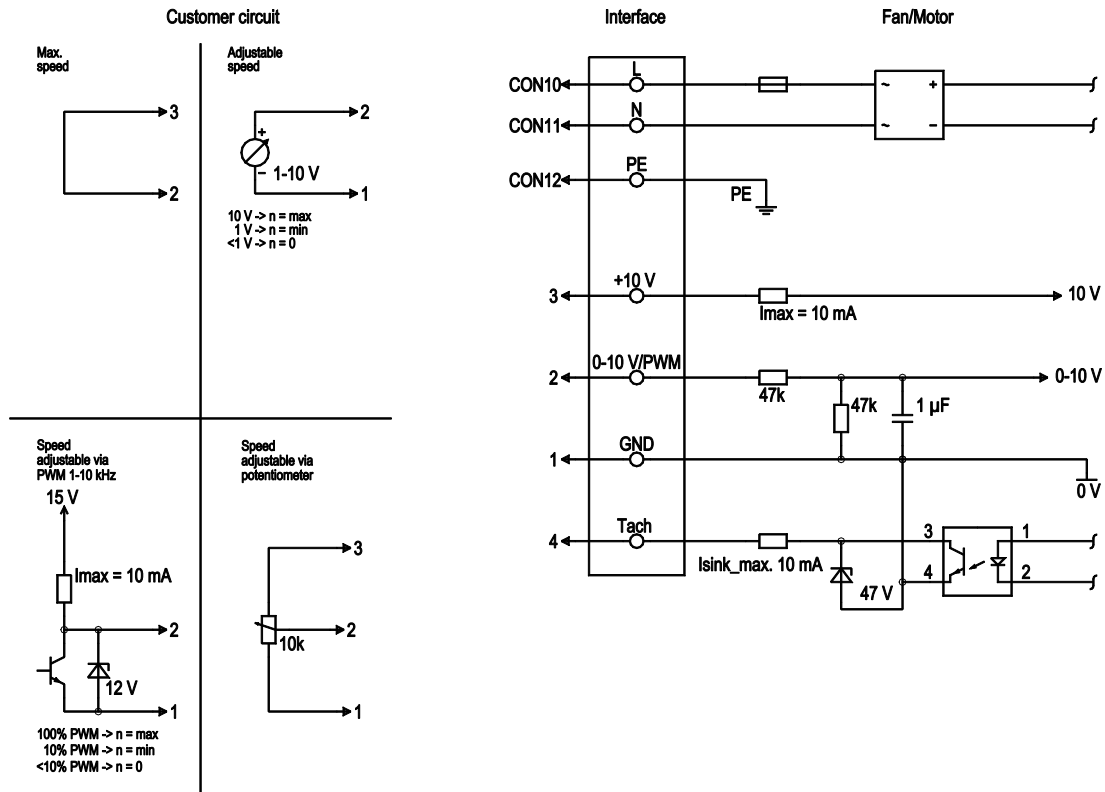

No.	Conn.	Designation	Color	Function/assignment
	CON10	L	black	Supply connection, power supply, phase, see nameplate for voltage range
	CON11	N	blue	Supply connection, power supply, neutral conductor, see nameplate for voltage range
	CON12	PE	green/yellow	Ground connection
2	0- 10V PWM		yellow	0-10 V / PWM control input, Ri=100 kΩ, SELV
4	Tach		white	Tach output, open collector, 1 pulse per revolution, Isink max = 10 mA, SELV
3	+10 V		red	Fixed voltage output 10 VDC +/-3 %, Imax. 10 mA, short-circuit-proof, power supply for ext. devices (e.g. pot), SELV
1	GND		blue	Reference ground for control interface, SELV

Curves: Air performance 50 Hz

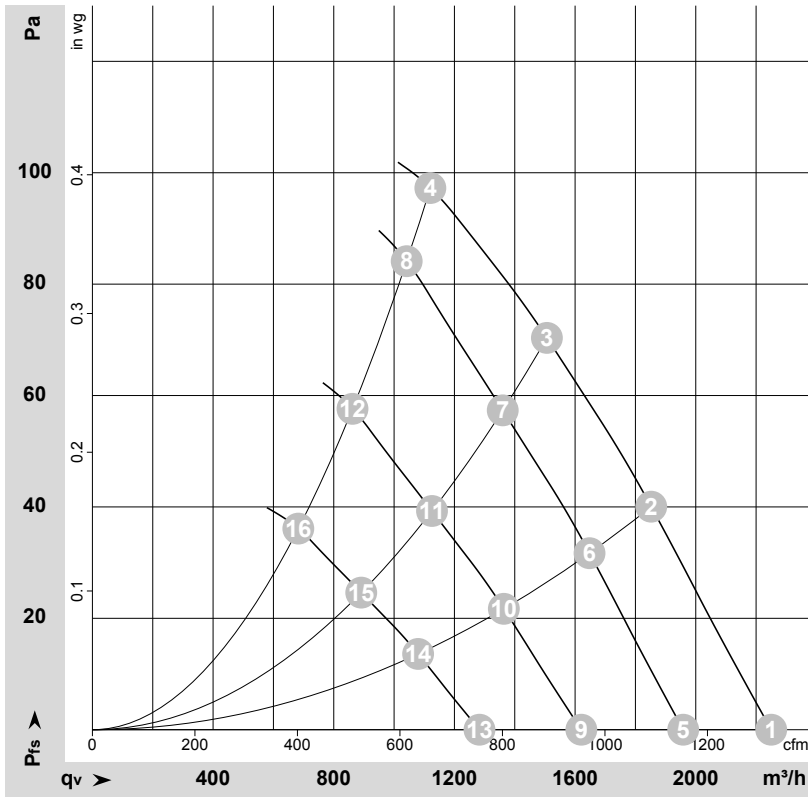

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-166935-1
Date: 2014-10-01
Housing: 03968-2-4037

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	q _v	p _{fs}	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m³/h	Pa	cfm	in. wg
1	230	50	1665	73	0.64	58	65	2250	0	1325	0.00
2	230	50	1630	82	0.71	58	65	1850	40	1090	0.16
3	230	50	1605	87	0.75	58	65	1505	70	885	0.28
4	230	50	1560	97	0.80	60	68	1120	98	660	0.39
5	230	50	1450	48	0.42	55	61	1960	0	1150	0.00
6	230	50	1450	58	0.50	55	62	1650	32	970	0.13
7	230	50	1450	64	0.55	56	63	1360	57	800	0.23
8	230	50	1450	78	0.66	59	66	1040	85	615	0.34
9	230	50	1200	27	0.24	50	57	1620	0	955	0.00
10	230	50	1200	33	0.28	50	57	1365	22	805	0.09
11	230	50	1200	36	0.31	51	58	1125	39	665	0.16
12	230	50	1200	44	0.38	54	61	860	58	505	0.23
13	230	50	950	14	0.12	44	51	1285	0	755	0.00
14	230	50	950	16	0.14	44	51	1080	14	635	0.06
15	230	50	950	18	0.15	45	52	890	25	525	0.10
16	230	50	950	22	0.19	48	55	685	36	400	0.14

U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
q_v = Air flow · p_{fs} = Pressure increase