

EC axial fan

sickled blades (S series)

A3G350-AN01-19 ebmpapst Datasheet
 sales@fansco.com
 www.fansco.com

Nominal data

Type	A3G350-AN01-19	
Motor	M3G074-CF	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Type of data definition		ml
Speed (rpm)	min ⁻¹	1475
Power input	W	165
Current draw	A	1.35
Max. back pressure	Pa	100
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
 Subject to alterations

Data according to ErP directive

		Actual	Request 2015
01 Overall efficiency η_{es}	%	39.8	28.6
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		51.2	40
05 Variable speed drive		Yes	

Data definition with optimum efficiency.

The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.

09 Power input P_{ed}	kW	0.16
09 Air flow q_v	m³/h	2400
09 Pressure increase p_{fs}	Pa	87
10 Speed (rpm) n	min ⁻¹	1495
11 Specific ratio*		1.00

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-134592



EC axial fan

sickled blades (S series)

Technical features


Mass	2.2 kg
Size	350 mm
Surface of rotor	Thick layer passivated
Material of blades	Press-fitted sheet steel blank, sprayed with PP plastic
Number of blades	5
Direction of air flow	"V"
Direction of rotation	Counter-clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"B"
Humidity (F)/environmental protection class (H)	F3-1
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Any
Condensate discharge holes	None, open rotor
Cooling bore / aperture	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 10 mA - Tach output - Output limit - Motor current limit - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Overvoltage detection - Over-temperature protected electronics / motor - Line undervoltage detection
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Motor protection	PTC resistor
Cable exit	Variable
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60335-1; CE



EC axial fan

sickled blades (S series)

Product drawing

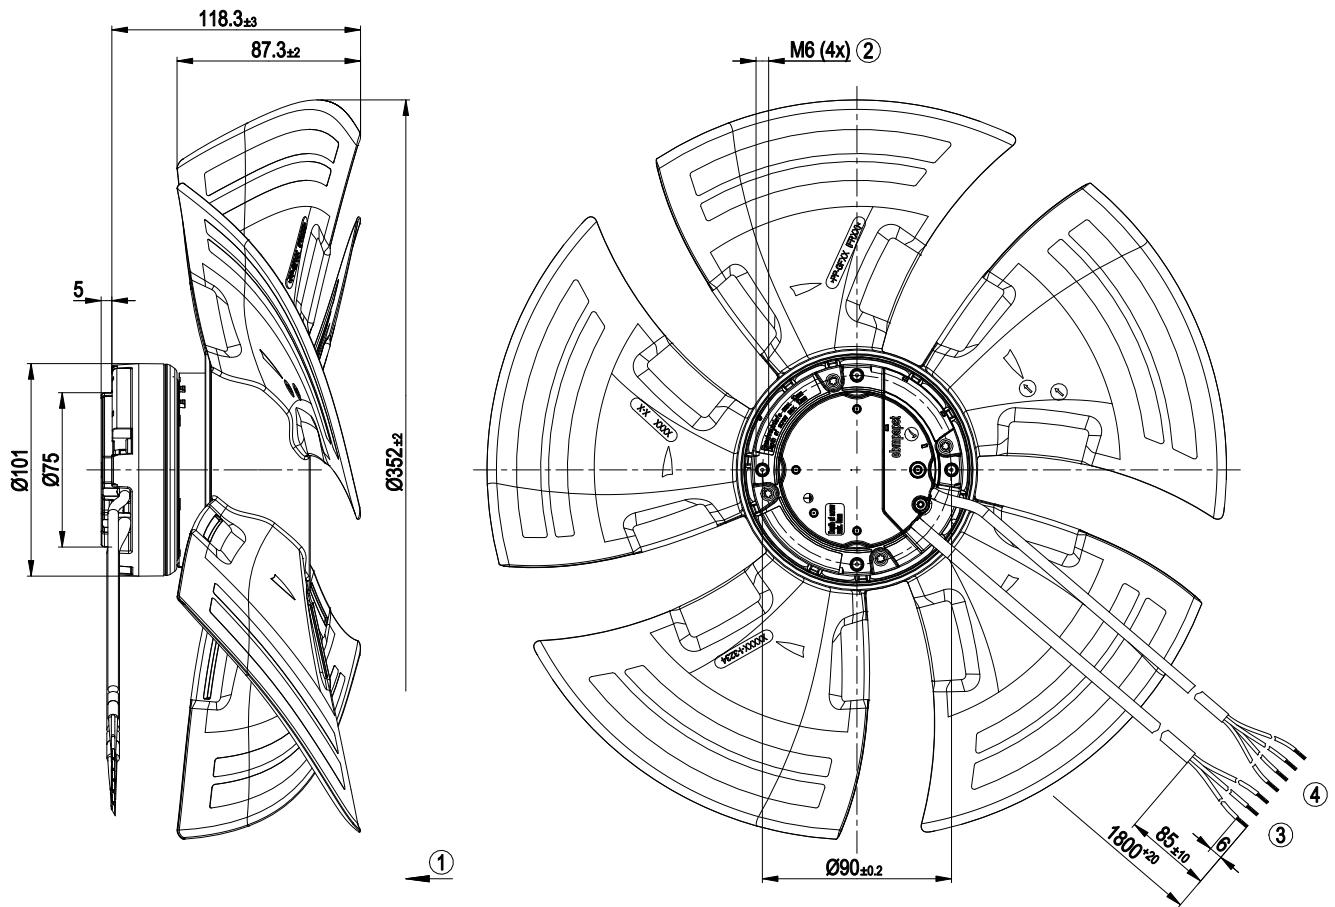


1	Direction of air flow "V"
2	Thread reach max. 10 mm
3	Connection line PVC AWG20, 3x lead tips crimped
4	Connection line PVC AWG22, 4x lead tips crimped

EC axial fan

sickled blades (S series)

Connection screen

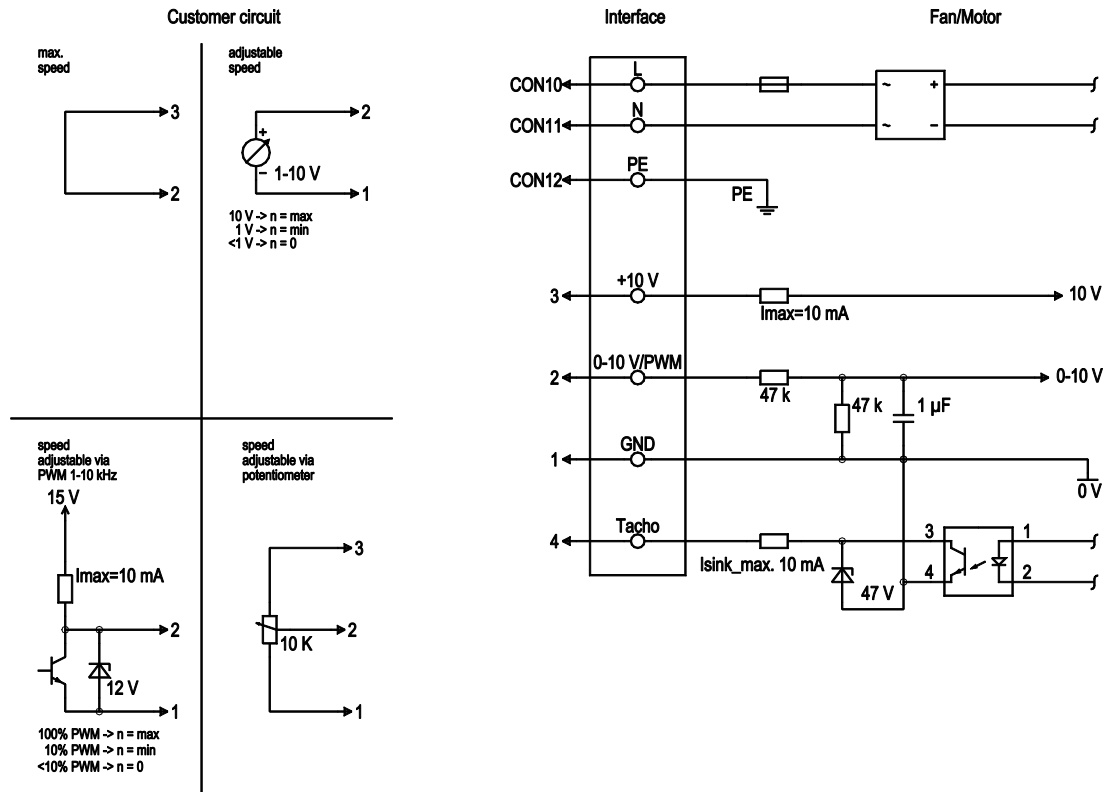


No.	Conn.	Designation	Colour	Function / assignment
	CON10	L	black	Mains connection, power supply, phase, see type plate for voltage range
	CON11	N	blue	Mains connection, power supply, neutral conductor, see type plate for voltage range
	CON12	PE	green/yellow	Earth connection
	2	0- 10V PWM	yellow	0-10 V/PWM control input, Ri=100 kΩ, SELV
	4	Tach	white	Speed monitoring output, open collector, 1 pulse per revolution, Isink max = 10 mA, SELV
	3	+10 V	red	Fixed voltage output 10 VDC +/-3 %, Imax. 10 mA, short-circuit-proof, power supply for ext. devices (e.g. potentiometer), SELV
	1	GND	blue	Signal ground for control interface, SELV



EC axial fan

sickled blades (S series)

Charts: Air flow 50 Hz

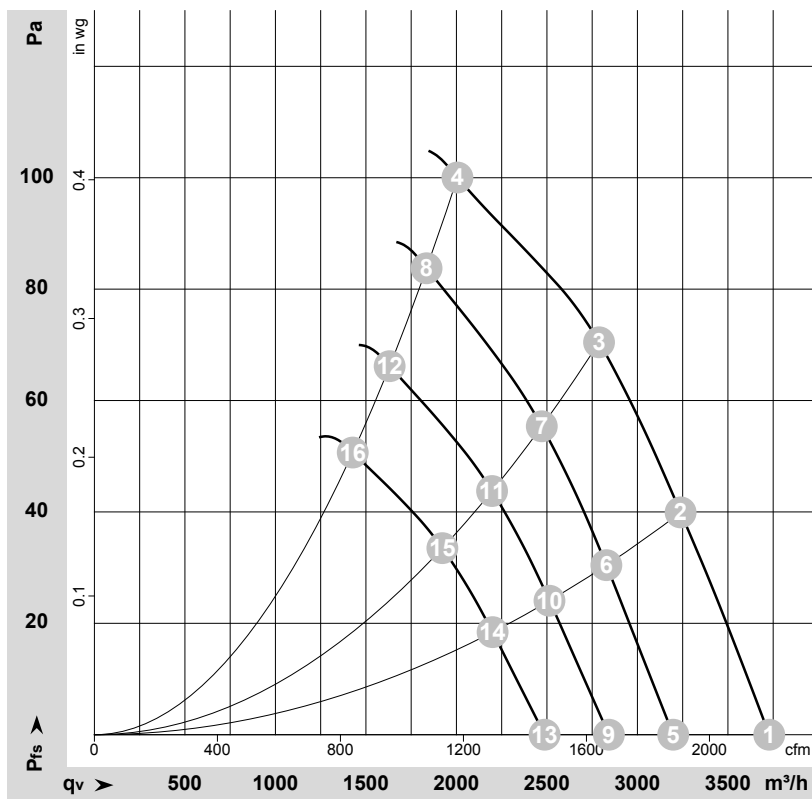

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-134592-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	q _v	p _{fs}	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m³/h	Pa	cfm	inH ₂ O
1	230	50	1575	141	1.15	64	71	3730	0	2195	0.00
2	230	50	1545	155	1.24	61	68	3240	40	1905	0.16
3	230	50	1525	164	1.32	58	66	2790	70	1640	0.28
4	230	50	1475	165	1.35	59	67	2005	100	1180	0.40
5	230	50	1350	89	0.72	60	67	3200	0	1880	0.00
6	230	50	1350	103	0.83	58	65	2830	31	1665	0.12
7	230	50	1350	114	0.92	55	62	2470	55	1455	0.22
8	230	50	1350	127	1.02	56	64	1835	84	1080	0.34
9	230	50	1200	63	0.51	57	64	2840	0	1675	0.00
10	230	50	1200	72	0.58	55	62	2515	24	1480	0.10
11	230	50	1200	80	0.65	52	60	2195	44	1295	0.18
12	230	50	1200	89	0.72	53	61	1630	66	960	0.26
13	230	50	1050	42	0.34	53	60	2485	0	1465	0.00
14	230	50	1050	49	0.39	51	59	2200	19	1295	0.08
15	230	50	1050	54	0.43	49	56	1920	34	1130	0.14
16	230	50	1050	60	0.48	50	58	1425	51	840	0.20

U = Supply voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side · q_v = Air flow
p_{fs} = Pressure increase

