

EC axial fan - HyBlade

sickled blades (S series)
for agricultural ventilation

A3G400-BK08-H6 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	A3G400-BK08-H6	
Motor	M3G084-DF	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 277
Frequency	Hz	50/60
Type of data definition		ml
Speed (rpm)	min ⁻¹	1760
Power input	W	500
Current draw	A	2.2
Max. back pressure	Pa	180
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60
Starting current	A	2.8

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations

Data according to ErP directive

		Actual	Request 2015
01 Overall efficiency η_{es}	%	39.6	31.8
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		47.8	40
05 Variable speed drive		Yes	

Data definition with optimum efficiency.
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.

09 Power input P_{ed}	kW	0.5
09 Air flow q_v	m³/h	3505
09 Pressure increase p_{fs}	Pa	184
10 Speed (rpm) n	min ⁻¹	1745
11 Specific ratio*		1.00

* Specific ratio = $1 + p_s / 100\,000\text{ Pa}$


LU-156072



Technical features

Mass	4.1 kg
Size	400 mm
Surface of rotor	Coated in black
Material of terminal box	PP plastic
Material of electronics housing	Die-cast aluminium, coated in black
Material of blades	Press-fitted, coated sheet steel blank, sprayed with PP plastic
Number of blades	5
Direction of air flow	"A"
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 55
Insulation class	"F"
Humidity (F)/environmental protection class (H)	F5
Max. permissible ambient motor temp. (transp./ storage)	+80 °C
Min. permissible ambient motor temp. (transp./storage)	-40 °C
Mounting position	Shaft horizontal or rotor on top; rotor on bottom on request
Condensate discharge holes	None
Operation mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 10 mA - Operation and alarm display - Alarm relay - Integrated PID controller - Output limit - Motor current limit - PFC, active - RS485 MODBUS RTU - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Over-temperature protected electronics / motor - Line undervoltage / phase failure detection
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Electrical leads	Via terminal box
Motor protection	Thermal overload protector (TOP) wired internally
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 61800-5-1; CE
Approval	C22.2 Nr.77 + CAN/CSA-E60730-1; EAC; UL 1004-7 + 60730
Remark	Standard conformity as per EN 60335-1 in preparation

Product drawing

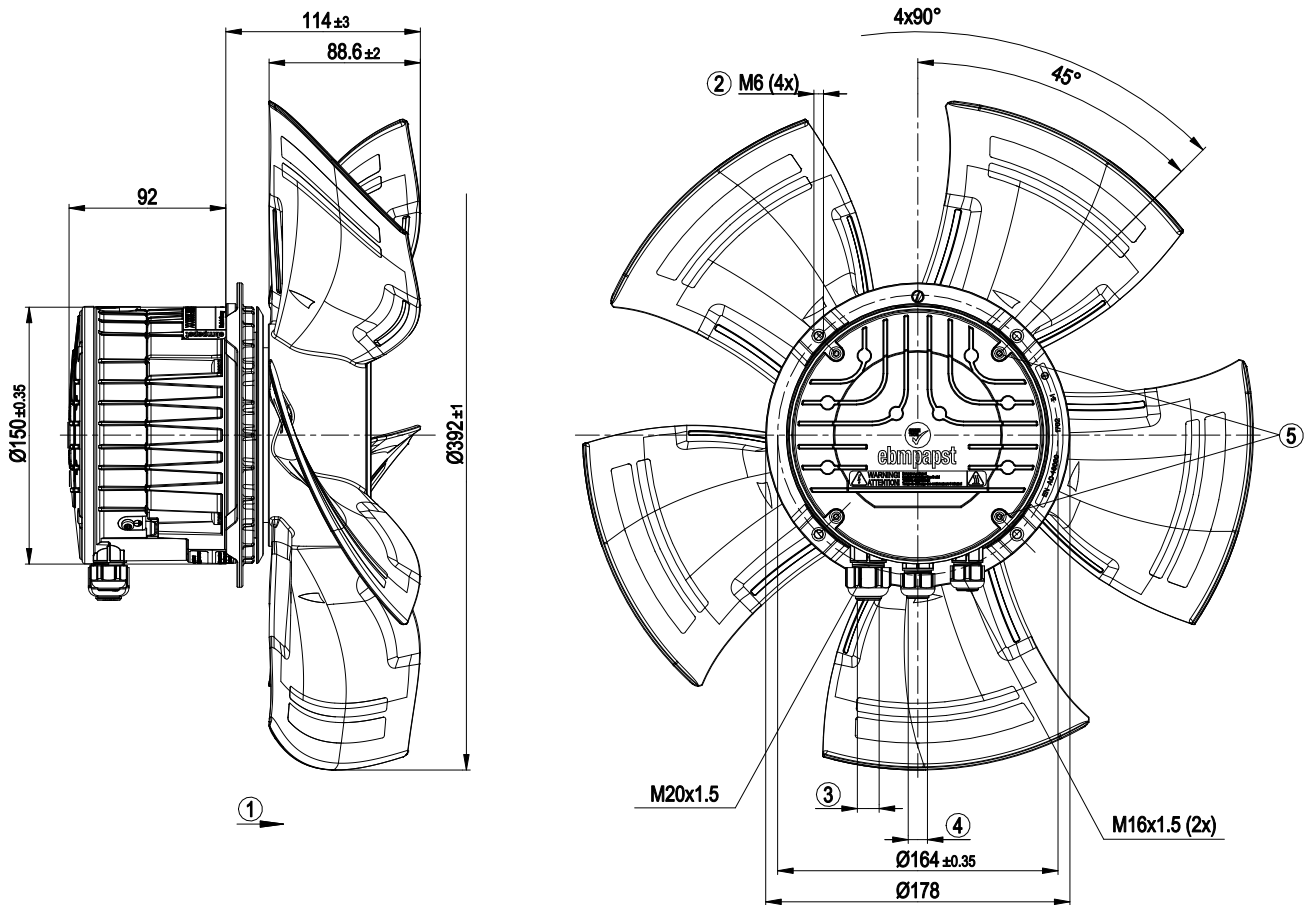


1	Direction of air flow "A"
2	Thread reach max. 16 mm
3	Cable diameter min. 8 mm, max. 12 mm, tightening torque 2.5 ± 0.4 Nm
4	Cable diameter min. 6 mm, max. 10 mm, tightening torque 2.5 ± 0.4 Nm Cable diameter min. 4 mm, max. 7 mm, tightening torque 2.5 ± 0.4 Nm (use must be made of sealing ring provided)
5	Tightening torque 1.5 ± 0.2 Nm

Connection screen

PE	PE	N		L	NC	COM	GND	RSA	RSB	0-10 V	+10 V	
1	2	3	4	5	6	7	8	9	10	11	12	

No.	Conn.	Designation	Function / assignment
	1	PE	Protective earth
	2	PE	Protective earth
	3	N	Power supply, neutral conductor
	4	-	not used
	5	L	Power supply, phase
	6	NC	Status relay, floating status contact, break for failure, contact rating 250 VAC / 2 A (AC1) min. 10 mA, basic insulation on mains side and reinforced insulation on control interface side
	7	COM	Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, basic insulation on mains side and reinforced insulation on control interface side
	8	GND	Signal ground for control interface, SELV
	9	RSA	RS-485 interface for MODBUS, RSA; SELV
	10	RSB	RS-485 interface for MODBUS, RSB; SELV
	11	0-10 V	Analogue input (set value) SELV, 0-10 V, Ri=100kΩ, parametrisable curve
	12	+10 V	Fixed voltage output 10 VDC, SELV, +10 V ±3%, max. 10 mA, short-circuit-proof, power supply for external devices (e.g. potentiometer)

Charts: Air flow 50 Hz

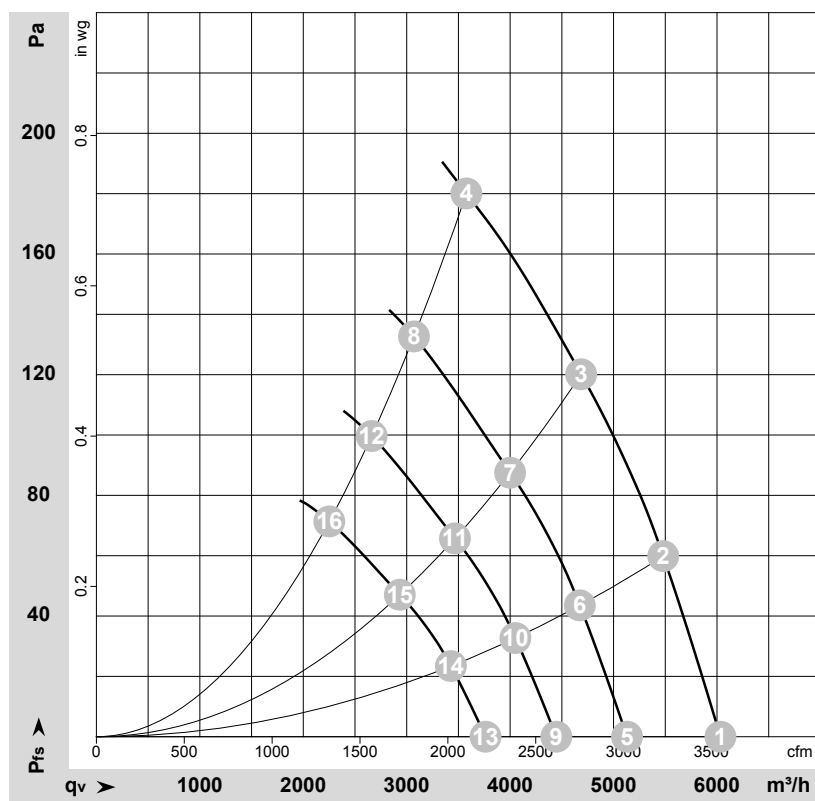

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-156072-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	q _v	p _{fs}	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m³/h	Pa	cfm	inH ₂ O
1	230	50	1760	432	1.89	72	79	6035	0	3550	0.00
2	230	50	1760	464	2.03	70	77	5480	60	3225	0.24
3	230	50	1760	490	2.14	66	73	4685	120	2760	0.48
4	230	50	1760	500	2.20	66	74	3575	180	2105	0.72
5	230	50	1500	265	1.16			5130	0	3020	0.00
6	230	50	1500	288	1.26			4675	45	2750	0.18
7	230	50	1500	305	1.33			4000	88	2355	0.35
8	230	50	1500	317	1.38			3070	133	1805	0.53
9	230	50	1300	173	0.75			4445	0	2615	0.00
10	230	50	1300	187	0.82			4050	34	2385	0.14
11	230	50	1300	198	0.87			3465	66	2040	0.26
12	230	50	1300	207	0.90			2660	100	1565	0.40
13	230	50	1100	105	0.46			3760	0	2215	0.00
14	230	50	1100	114	0.50			3430	24	2020	0.10
15	230	50	1100	120	0.52			2935	47	1725	0.19
16	230	50	1100	125	0.55			2250	72	1325	0.29

U = Supply voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side · q_v = Air flow
p_{fs} = Pressure increase

