



A4D630-AF03-03 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Limited partnership · Headquarters Muldingen  
 Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Muldingen GmbH · Headquarters Muldingen  
 Amtsgericht (court of registration) Stuttgart · HRB 590142

## Nominal data

|                             |                       |      |      |      |      |      |      |
|-----------------------------|-----------------------|------|------|------|------|------|------|
| <b>Type</b>                 | <b>A4D630-AF03-03</b> |      |      |      |      |      |      |
| <b>Motor</b>                | <b>M4D138-LA</b>      |      |      |      |      |      |      |
| Phase                       |                       | 3~   | 3~   | 3~   | 3~   | 3~   | 3~   |
| Nominal voltage             | VAC                   | 230  | 265  | 277  | 400  | 460  | 480  |
| Wiring                      |                       | Δ    | Δ    | Δ    | Y    | Y    | Y    |
| Frequency                   | Hz                    | 50   | 60   | 60   | 50   | 60   | 60   |
| Method of obtaining data    |                       | ml   | ml   | ml   | ml   | ml   | ml   |
| Valid for approval/standard |                       | CE   | CE   | CE   | CE   | CE   | CE   |
| Speed (rpm)                 | min <sup>-1</sup>     | 1405 | 1650 | 1660 | 1405 | 1650 | 1660 |
| Power consumption           | W                     | 1720 | 2800 | 2860 | 1720 | 2800 | 2860 |
| Current draw                | A                     | 6.67 | 8.0  | 8.18 | 3.86 | 4.65 | 4.73 |
| Max. back pressure          | Pa                    | 220  | 300  | 310  | 220  | 300  | 310  |
| Max. back pressure          | in. wg                | 0.88 | 1.2  | 1.24 | 0.88 | 1.2  | 1.24 |
| Min. ambient temperature    | °C                    | -40  | -40  | -40  | -40  | -40  | -40  |
| Max. ambient temperature    | °C                    | 65   | 60   | 60   | 65   | 60   | 60   |
| Starting current            | A                     | 27   |      |      | 27   |      |      |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
 Subject to change

## Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

|                                   |   | Actual | Req. 2015 |                               |                   |       |
|-----------------------------------|---|--------|-----------|-------------------------------|-------------------|-------|
| 01 Overall efficiency $\eta_{es}$ | % | 35.4   | 35.2      | 09 Power consumption $P_e$    | kW                | 1.73  |
| 02 Measurement category           |   | A      |           | 09 Air flow $q_v$             | m <sup>3</sup> /h | 10845 |
| 03 Efficiency category            |   | Static |           | 09 Pressure increase $p_{fs}$ | Pa                | 205   |
| 04 Efficiency grade N             |   | 40.2   | 40        | 10 Speed (rpm) n              | min <sup>-1</sup> | 1405  |
| 05 Variable speed drive           |   | No     |           | 11 Specific ratio*            |                   | 1.00  |

Data obtained at optimum efficiency level.

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$

LU-201248

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings). The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again. The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).




## Technical description

|  |  |
|--|--|
| Weight   | 23.9 kg  |
| Size   | 630 mm   |
| Motor size   | 138  |
| Rotor surface  | Cast in aluminum   |
| Terminal box material  | PP plastic   |
| Blade material   | Sheet aluminum insert, sprayed with PP plastic   |
| Number of blades   | 5  |
| Blade pitch  | -10°   |
| Airflow direction  | V  |
| Direction of rotation  | Clockwise, viewed toward rotor   |
| Degree of protection   | IP54   |
| Insulation class   | "F"  |
| Moisture (F) / Environmental (H) protection class                          | H2   |
| Ambient temperature note   | Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings. |
| Max. permitted ambient temp. for motor (transport/storage)                 | +80 °C   |
| Min. permitted ambient temp. for motor (transport/storage)                 | -40 °C   |
| Installation position  | Any  |
| Condensation drainage holes  | On rotor and stator sides  |
| Mode   | S1   |
| Motor bearing  | Ball bearing   |
| Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system) | <= 3.5 mA  |
| Electrical hookup  | Terminal box   |
| Motor protection   | Thermal overload protector (TOP) with basic insulation   |
| With cable   | Axial  |
| Protection class   | I (with customer connection of protective earth)   |
| Conformity with standards  | EN 60034-1 (2010); CE; UKCA  |
| Approval   | CSA C22.2 No. 100; EAC; UL 1004-1  |

# AC axial fan - HyBlade

sickle-shaped blades (S series)


## Product drawing

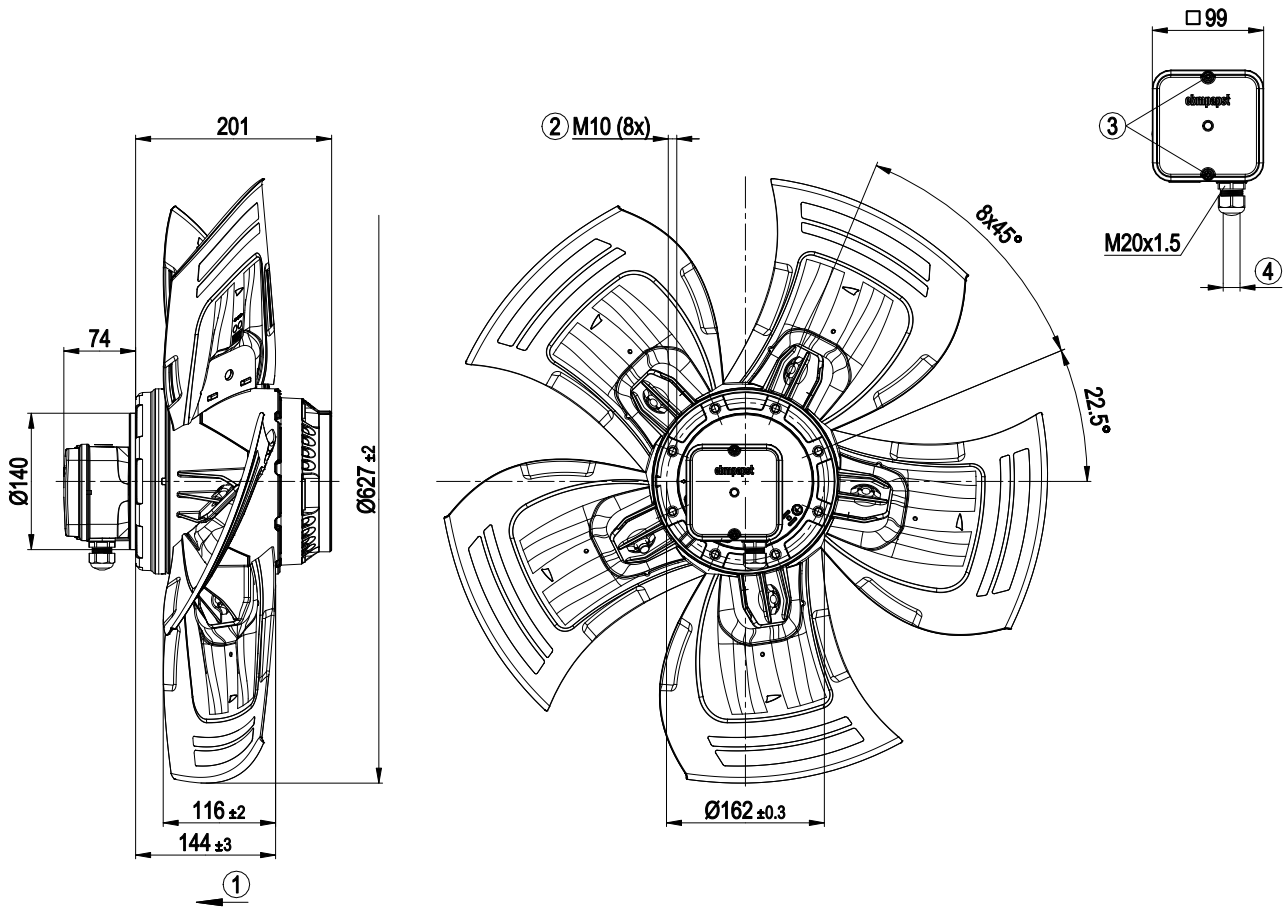

|   |  |
|---|--|
| 1 | Direction of air flow "V"  |
| 2 | Max. clearance for screw 18 mm   |
| 3 | Tightening torque $1.5 \pm 0.2$ Nm                                     |
| 4 | Cable diameter min. 7 mm, max. 14 mm, tightening torque $2 \pm 0.3$ Nm |




## Connection diagram

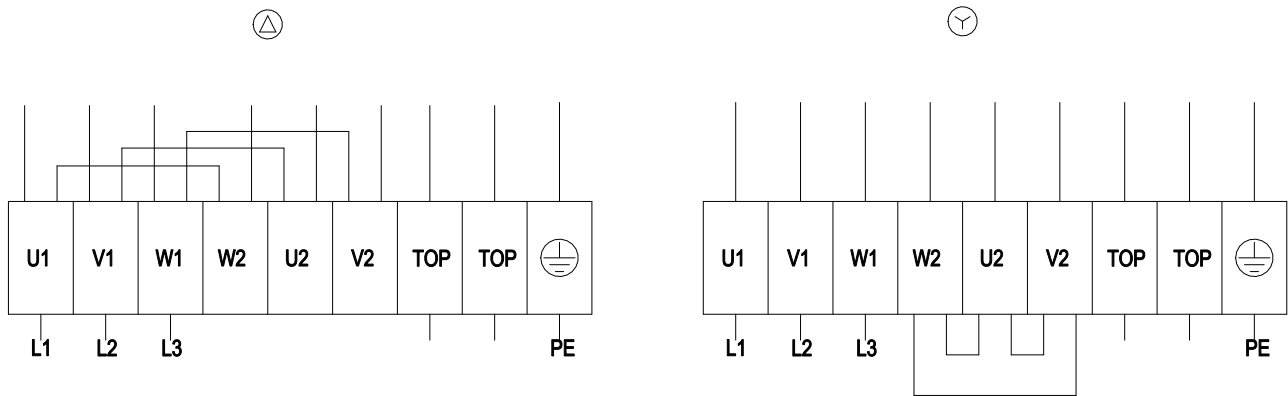

|    |                  |    |                 |     |              |
|----|------------------|----|-----------------|-----|--------------|
| Δ  | Delta connection | Y  | Star connection | L1  | = U1 = black |
| L2 | = V1 = blue      | L3 | = W1 = brown    | W2  | yellow       |
| U2 | green            | V2 | white           | TOP | 2x gray      |
| PE | green/yellow     |    |                 |     |              |

## Curves: Air performance 50 Hz Y

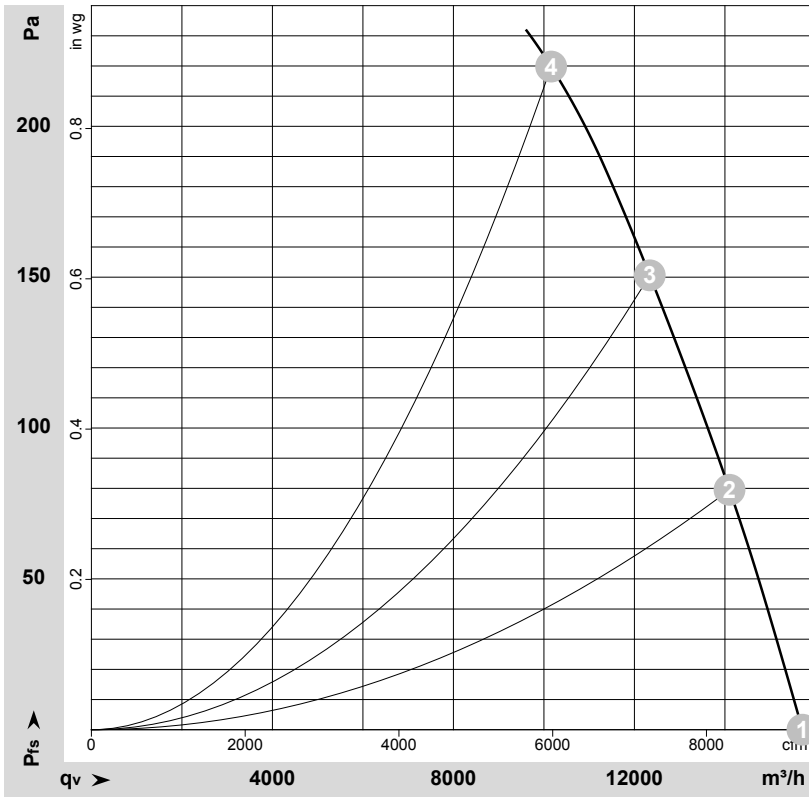

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-121453-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.


## Measured values

|   | Wired | U   | f  | n                 | $P_e$ | I    | $LpA_{in}$ | $LwA_{in}$ | $LwA_{out}$ | $q_v$                 | $p_{fs}$ | $q_v$ | $p_{fs}$ |
|---|-------|-----|----|-------------------|-------|------|------------|------------|-------------|-----------------------|----------|-------|----------|
|   |       | V   | Hz | $\text{min}^{-1}$ | W     | A    | dB(A)      | dB(A)      | dB(A)       | $\text{m}^3/\text{h}$ | Pa       | cfm   | in. wg   |
| 1 | Y     | 400 | 50 | 1445              | 1147  | 3.33 | 71         | 78         | 78          | 15715                 | 0        | 9250  | 0.00     |
| 2 | Y     | 400 | 50 | 1430              | 1367  | 3.50 | 69         | 76         | 76          | 14100                 | 80       | 8300  | 0.32     |
| 3 | Y     | 400 | 50 | 1405              | 1720  | 3.86 | 72         | 78         | 78          | 12340                 | 150      | 7260  | 0.60     |
| 4 | Y     | 400 | 50 | 1405              | 1720  | 3.86 | 75         | 82         | 82          | 10160                 | 220      | 5980  | 0.88     |

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) ·  $P_e$  = Power consumption · I = Current draw ·  $LpA_{in}$  = Sound pressure level intake side ·  $LwA_{in}$  = Sound power level intake side  
 $LwA_{out}$  = Sound power level outlet side ·  $q_v$  = Air flow ·  $p_{fs}$  = Pressure increase



## Curves: Air performance 60 Hz Y

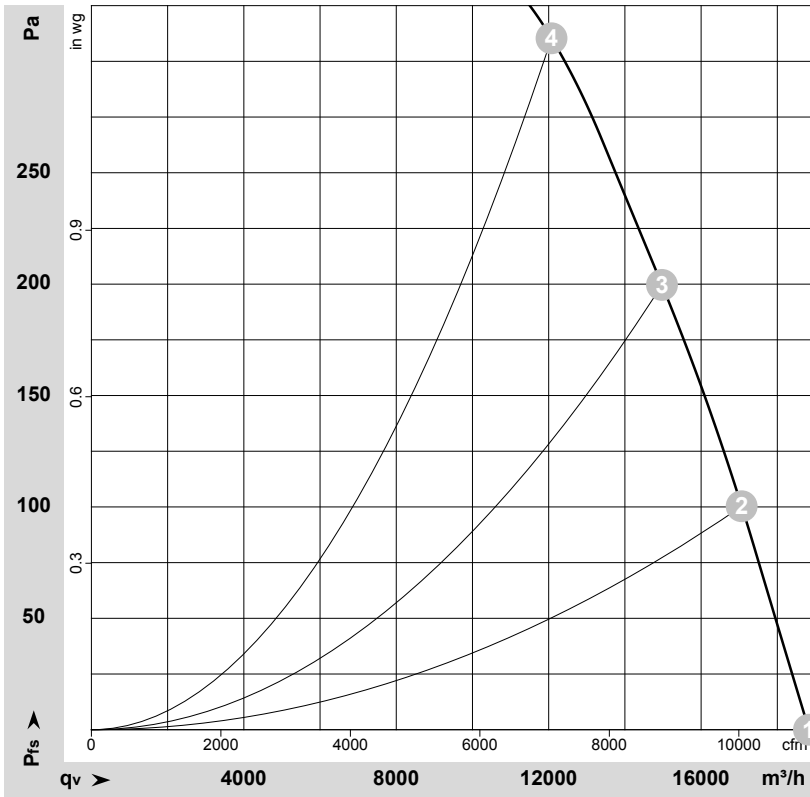

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-121467-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

|   | Wired | U   | f  | n                 | P <sub>e</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | LwA <sub>out</sub> | q <sub>v</sub>    | p <sub>fs</sub> | q <sub>v</sub> | p <sub>fs</sub> |
|---|-------|-----|----|-------------------|----------------|------|-------------------|-------------------|--------------------|-------------------|-----------------|----------------|-----------------|
|   |       | V   | Hz | min <sup>-1</sup> | W              | A    | dB(A)             | dB(A)             | dB(A)              | m <sup>3</sup> /h | Pa              | cfm            | in. wg          |
| 1 | Y     | 480 | 60 | 1715              | 1884           | 3.71 | 75                | 82                | 82                 | 18830             | 0               | 11085          | 0.00            |
| 2 | Y     | 480 | 60 | 1700              | 2224           | 4.03 | 73                | 80                | 80                 | 17065             | 100             | 10045          | 0.40            |
| 3 | Y     | 480 | 60 | 1680              | 2552           | 4.36 | 75                | 82                | 82                 | 14975             | 200             | 8815           | 0.80            |
| 4 | Y     | 480 | 60 | 1660              | 2860           | 4.73 | 80                | 87                | 86                 | 12075             | 310             | 7105           | 1.24            |

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
 LwA<sub>out</sub> = Sound power level outlet side · q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase

