

A6D500-AJ03-01

AC axial fan - HyBlade

sickled blades (S series)



A6D500-AJ03-01 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	A6D500-AJ03-01						
Motor	M6D110-EF						
Phase		3~	3~	3~	3~	3~	3~
Nominal voltage	VAC	400	400	400	400	480	480
Connection		Δ	Y	Δ	Y	Δ	Y
Frequency	Hz	50	50	60	60	60	60
Type of data definition		ml	ml	ml	ml	ml	ml
Valid for approval / standard		-	-	-	-	-	-
Speed (rpm)	min ⁻¹	930	800	1050	800	1100	910
Power input	W	270	190	380	250	415	295
Current draw	A	0.69	0.4	0.75	0.43	0.78	0.45
Max. back pressure	Pa	75	55	90	55	100	70
Min. ambient temperature	°C	-40	-40	-40	-40	-40	-40
Max. ambient temperature	°C	65	65	65	65	65	65
Starting current	A	2.5		2.3		2.8	

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations




Technical features

Mass	7.5 kg
Size	500 mm
Surface of rotor	Coated in black
Material of terminal box	PP plastic
Material of blades	Press-fitted sheet steel blank, sprayed with PP plastic
Number of blades	5
Direction of air flow	"V"
Direction of rotation	Counter-clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"F"
Humidity (F)/environmental protection class (H)	F4-1
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensate discharge holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Electrical leads	Via terminal box
Motor protection	Thermal overload protector (TOP) brought out, basic insulation
Cable exit	Axial
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 61800-5-1
Approval	CCC; VDE; EAC



Product drawing

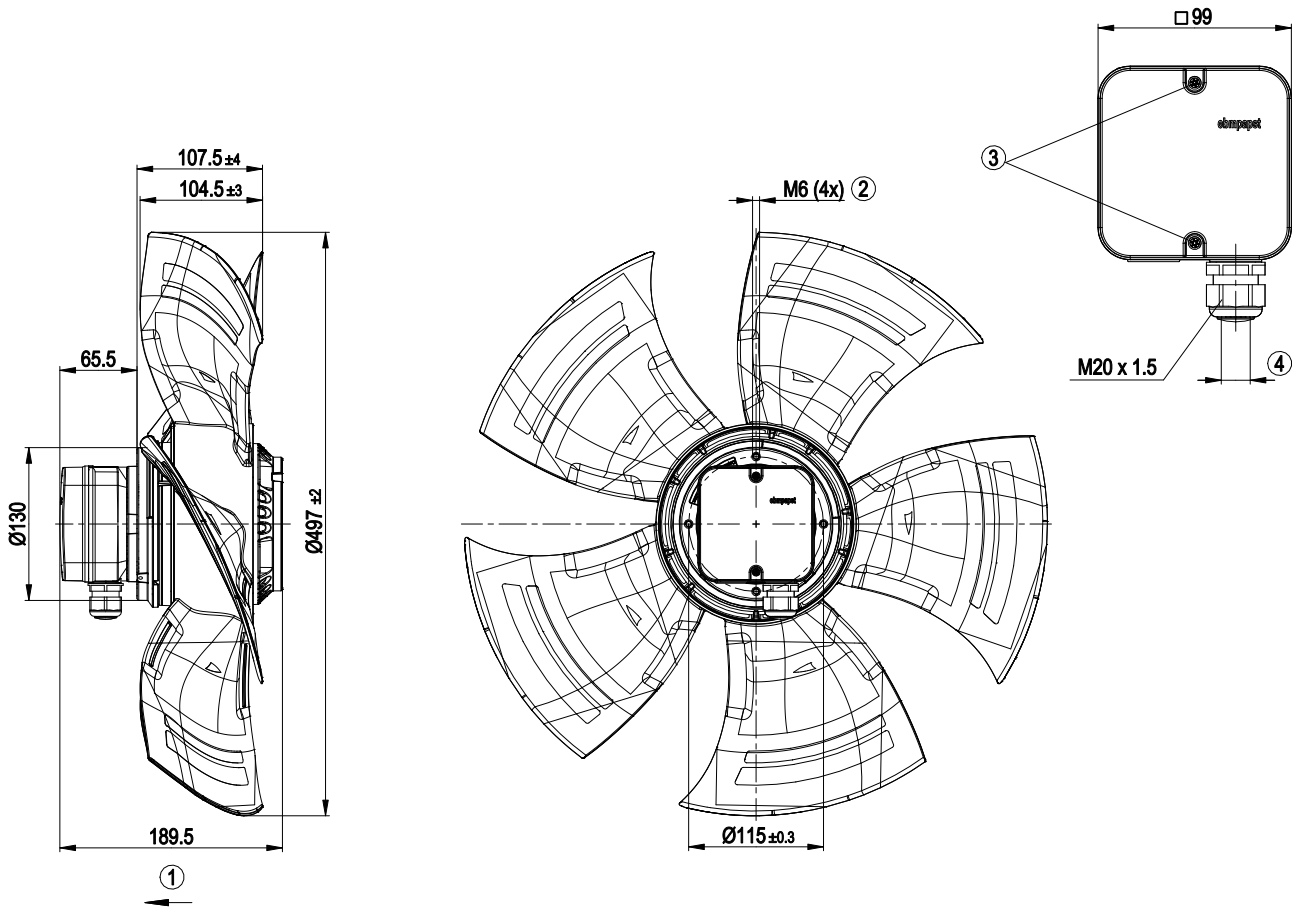

1	Direction of air flow "V"
2	Screw depth max. 12 mm
3	Tightening torque 1.5±0.2 Nm
4	Cable diameter: min. 6 mm, max. 12 mm; tightening torque: 2±0.3 Nm




Connection screen



Δ	Delta connection	Y	Star connection	L1	= V1 = blue
L2	= U1 = black	L3	= W1 = brown	W2	yellow
U2	green	V2	white	TOP	2 x grey
PE	green/yellow				

Charts: Air flow 50 Hz

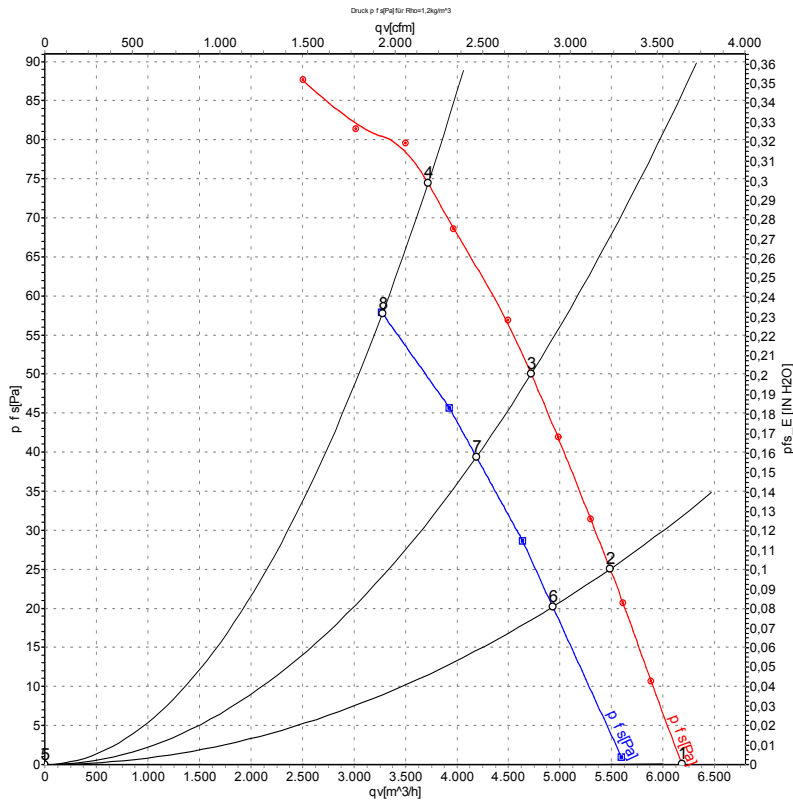

Measurement: LU-105753-1
Measurement: LU-106651-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: L_{wA} measured as per ISO 13347 / L_{pA} measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.


Measured values

	Conn.	U	f	n	P _e	I	L _{pA_{in}}	L _{wA_{in}}	L _{wA_{out}}	q _v	P _f	q _v	P _f
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m ³ /h	Pa	cfm	inH ₂ O
1	Δ	400	50	955	206	0.65	61	67	67	6185	0	3640	0.00
2	Δ	400	50	945	230	0.65	58	64	64	5485	25	3230	0.10
3	Δ	400	50	935	248	0.66	55	62	62	4720	50	2780	0.20
4	Δ	400	50	930	270	0.69	56	63	62	3720	75	2190	0.30
5	Y	400	50	870	145	0.27	59	65	65	5595	0	3295	0.00
6	Y	400	50	850	159	0.29	56	62	62	4930	20	2900	0.08
7	Y	400	50	830	173	0.30	53	59	59	4190	39	2465	0.16
8	Y	400	50	800	190	0.40	52	59	59	3275	55	1930	0.22

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed (rpm) · P_e = Power input · I = Current draw · L_{pA_{in}} = Sound pressure level inlet side · L_{wA_{in}} = Sound power level inlet side
L_{wA_{out}} = Sound power level outlet side · q_v = Air flow · P_f = Pressure increase



Charts: Air flow 60 Hz

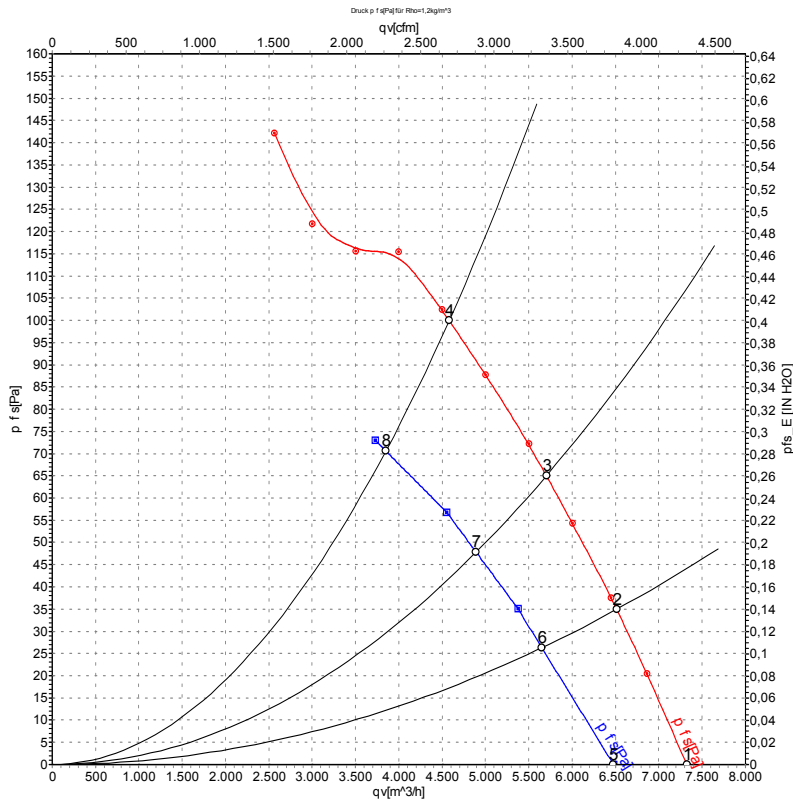

Measurement: LU-106149-1
Measurement: LU-106413-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	Conn.	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m ³ /h	Pa	cfm	inH ₂ O
1	Δ	480	60	1130	314	0.69	64	70	71	7325	0	4310	0.00
2	Δ	480	60	1120	351	0.70	60	67	67	6515	35	3835	0.14
3	Δ	480	60	1110	380	0.72	59	66	65	5705	65	3355	0.26
4	Δ	480	60	1100	415	0.78	59	66	66	4580	100	2695	0.40
5	Y	480	60	1000	235	0.34	61	68	68	6475	0	3810	0.00
6	Y	480	60	965	257	0.37	58	64	64	5650	26	3325	0.10
7	Y	480	60	945	273	0.39	56	62	62	4890	48	2880	0.19
8	Y	480	60	910	295	0.45	55	62	61	3850	70	2265	0.28

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed (rpm) · P_e = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side
LwA_{out} = Sound power level outlet side · q_v = Air flow · p_{fs} = Pressure increase

