

A6D500-AJ05-05 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

## Nominal data

|                               |                   |      |      |      |      |
|-------------------------------|-------------------|------|------|------|------|
| Type                          | A6D500-AJ05-05    |      |      |      |      |
| Motor                         | M6D110-EF         |      |      |      |      |
| Phase                         |                   | 3~   | 3~   | 3~   | 3~   |
| Nominal voltage               | VAC               | 400  | 400  | 480  | 480  |
| Connection                    |                   | Δ    | Y    | Δ    | Y    |
| Frequency                     | Hz                | 50   | 50   | 60   | 60   |
| Type of data definition       |                   | ml   | ml   | ml   | ml   |
| Valid for approval / standard |                   | CE   | CE   | CE   | CE   |
| Speed                         | min <sup>-1</sup> | 920  | 785  | 1090 | 880  |
| Power input                   | W                 | 260  | 190  | 410  | 290  |
| Current draw                  | A                 | 0.63 | 0.32 | 0.72 | 0.41 |
| Max. back pressure            | Pa                | 70   | 50   | 95   | 62   |
| Min. ambient temperature      | °C                | -40  | -40  | -40  | -40  |
| Max. ambient temperature      | °C                | 80   | 80   | 80   | 80   |
| Starting current              | A                 | 2.2  | 0.73 | 2.4  | 0.8  |

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit  
Subject to alterations

## Data according to ErP directive

|                       |        |
|-----------------------|--------|
| Installation category | A      |
| Efficiency category   | Static |
| Variable speed drive  | No     |
| Specific ratio*       | 1.00   |

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$

|                                |                   | Actual | Request 2013 | Request 2015 |
|--------------------------------|-------------------|--------|--------------|--------------|
| Overall efficiency $\eta_{es}$ | %                 | 29.9   | 25.9         | 29.9         |
| Efficiency grade N             |                   | 40     | 36           | 40           |
| Power input $P_e$              | kW                | 0.25   |              |              |
| Air flow $q_v$                 | m <sup>3</sup> /h | 4105   |              |              |
| Pressure increase $p_{fs}$     | Pa                | 64     |              |              |
| Speed n                        | min <sup>-1</sup> | 925    |              |              |


Data definition with optimum efficiency. LU-140967  
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.



## Technical features


|                                                                    |                                                              |
|--------------------------------------------------------------------|--------------------------------------------------------------|
| Mass                                                               | 7.5 kg                                                       |
| Size                                                               | 500 mm                                                       |
| Surface of rotor                                                   | Coated in black                                              |
| Material of terminal box                                           | PP plastic                                                   |
| Material of blades                                                 | Press-fitted sheet steel blank, sprayed with PP plastic      |
| Number of blades                                                   | 5                                                            |
| Direction of air flow                                              | "A"                                                          |
| Direction of rotation                                              | Clockwise, seen on rotor                                     |
| Type of protection                                                 | IP 54                                                        |
| Insulation class                                                   | "F"                                                          |
| Humidity class                                                     | F4-1                                                         |
| Max. permissible ambient motor temp. (transp./ storage)            | +80 °C                                                       |
| Min. permissible ambient motor temp. (transp./storage)             | -40 °C                                                       |
| Mounting position                                                  | Shaft horizontal or rotor on bottom; rotor on top on request |
| Condensate discharge holes                                         | Rotor-side                                                   |
| Operation mode                                                     | S1                                                           |
| Motor bearing                                                      | Ball bearing                                                 |
| Touch current acc. IEC 60990 (measuring network Fig. 4, TN system) | <= 3.5 mA                                                    |
| Electrical leads                                                   | Via terminal box; With plug                                  |
| Motor protection                                                   | Thermal overload protector (TOP) brought out                 |
| Protection class                                                   | I (if protective earth is connected by customer)             |
| Product conforming to standard                                     | EN 61800-5-1; CE                                             |
| Approval                                                           | EAC; VDE                                                     |

## Product drawing

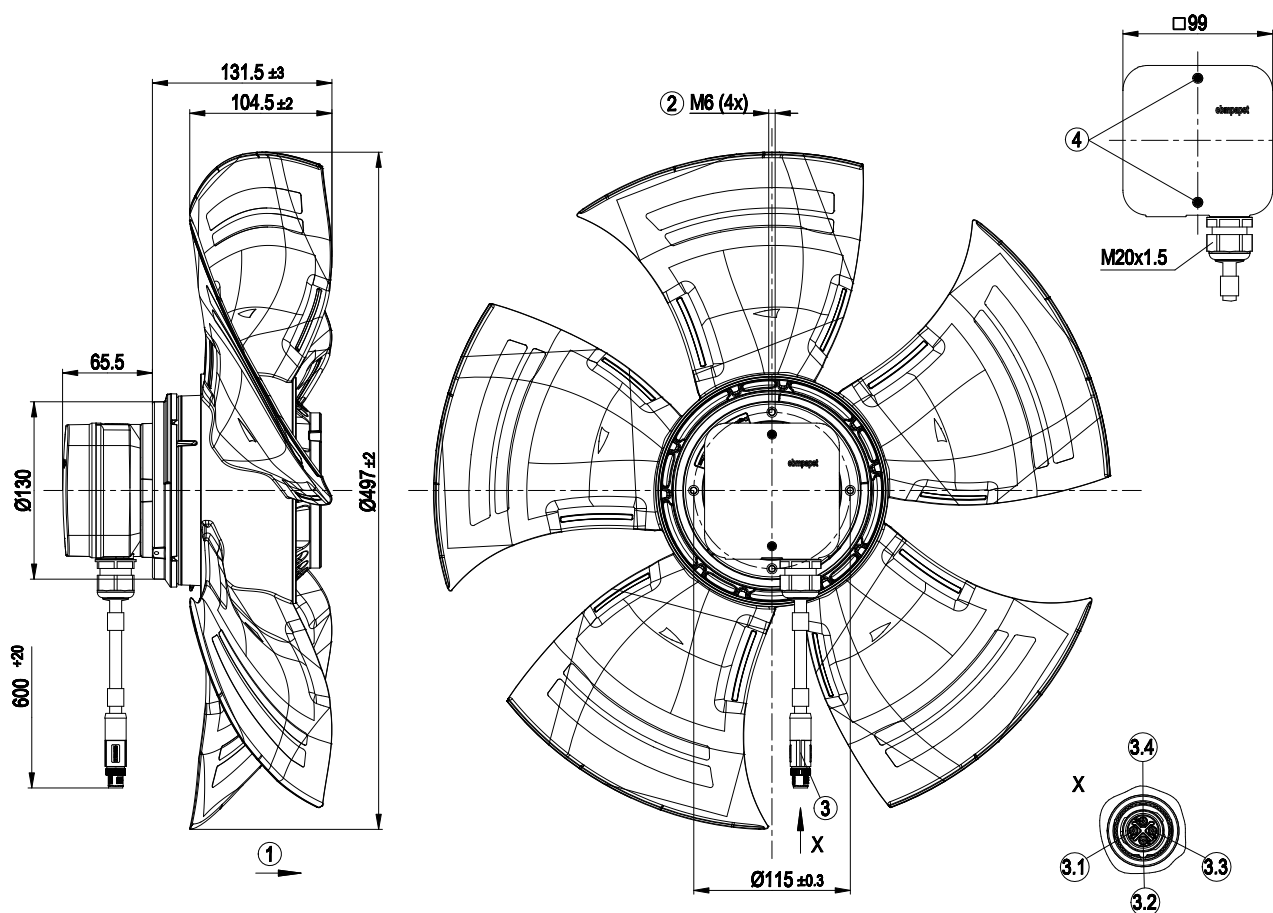

|     |                                                                                           |
|-----|-------------------------------------------------------------------------------------------|
| 1   | Direction of air flow "A"                                                                 |
| 2   | Thread reach max. 12 mm                                                                   |
| 3   | Connection line PUR 4x 1.5 mm <sup>2</sup> , with connector M12 Phoenix, 4-pole (s-coded) |
| 3.1 | L1                                                                                        |
| 3.2 | L2                                                                                        |
| 3.3 | L3                                                                                        |
| 3.4 | PE                                                                                        |
| 4   | Tightening torque 1.5±0.2 Nm                                                              |


Connection screen

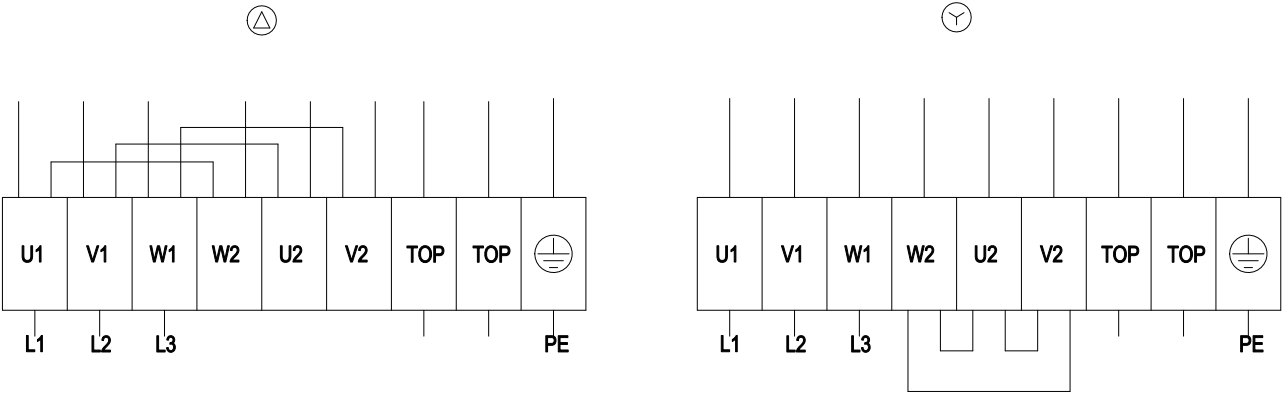

|    |                  |    |                 |     |              |
|----|------------------|----|-----------------|-----|--------------|
| Δ  | Delta connection | Y  | Star connection | L1  | = U1 = black |
| L2 | = V1 = blue      | L3 | = W1 = brown    | W2  | yellow       |
| U2 | green            | V2 | white           | TOP | 2 x grey     |
| PE | green/yellow     |    |                 |     |              |



## Charts: Air flow 50 Hz

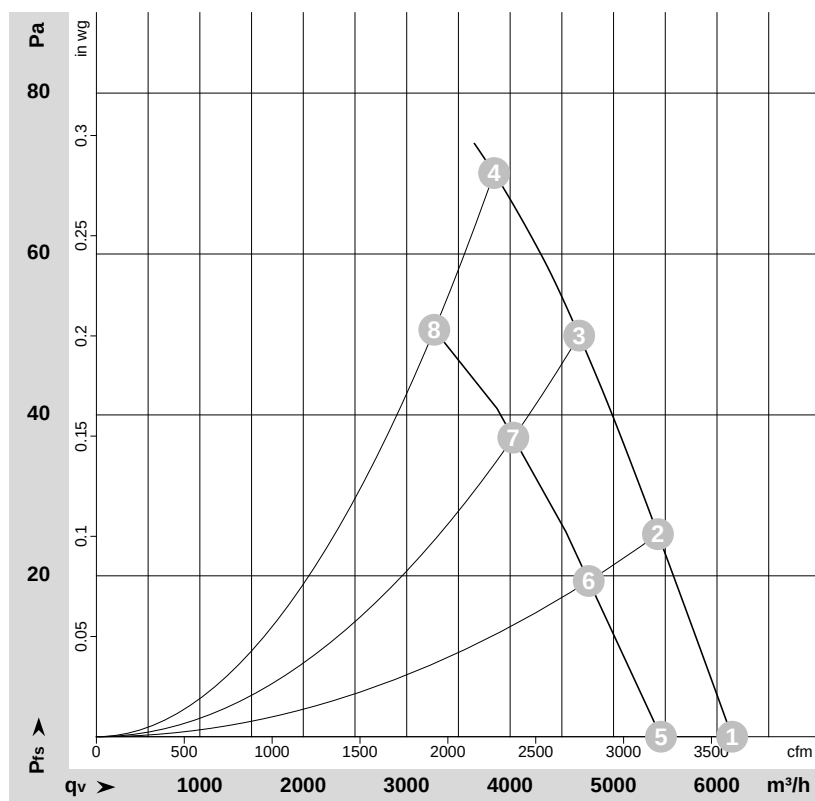

$\rho = 1,15 \text{ kg/m}^3 \pm 2\%$

Measurement: LU-152524

Measurement: LU-167953


Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

|   | Conn. | U   | f  | n                 | P <sub>e</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | LwA <sub>out</sub> | qv   | p <sub>fs</sub> |
|---|-------|-----|----|-------------------|----------------|------|-------------------|-------------------|--------------------|------|-----------------|
|   |       | V   | Hz | min <sup>-1</sup> | W              | A    | dB(A)             | dB(A)             | dB(A)              | m³/h | Pa              |
| 1 | Δ     | 400 | 50 | 945               | 202            | 0.58 | 62                | 68                | 68                 | 6145 | 0               |
| 2 | Δ     | 400 | 50 | 940               | 225            | 0.59 | 59                | 66                | 65                 | 5430 | 25              |
| 3 | Δ     | 400 | 50 | 930               | 245            | 0.60 | 56                | 63                | 63                 | 4670 | 50              |
| 4 | Δ     | 400 | 50 | 920               | 260            | 0.63 | 55                | 62                | 62                 | 3845 | 70              |
| 5 | Y     | 400 | 50 | 845               | 148            | 0.26 | 59                | 66                | 65                 | 5460 | 0               |
| 6 | Y     | 400 | 50 | 820               | 163            | 0.28 | 56                | 63                | 62                 | 4760 | 19              |
| 7 | Y     | 400 | 50 | 800               | 175            | 0.30 | 53                | 60                | 60                 | 4030 | 37              |
| 8 | Y     | 400 | 50 | 785               | 190            | 0.32 | 51                | 58                | 57                 | 3265 | 51              |

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed · P<sub>e</sub> = Power input · I = Current draw · LpA<sub>in</sub> = Sound pressure level inlet side · LwA<sub>in</sub> = Sound power level inlet side  
LwA<sub>out</sub> = Sound power level outlet side · qv = Air flow · p<sub>fs</sub> = Pressure increase

## Charts: Air flow 60 Hz

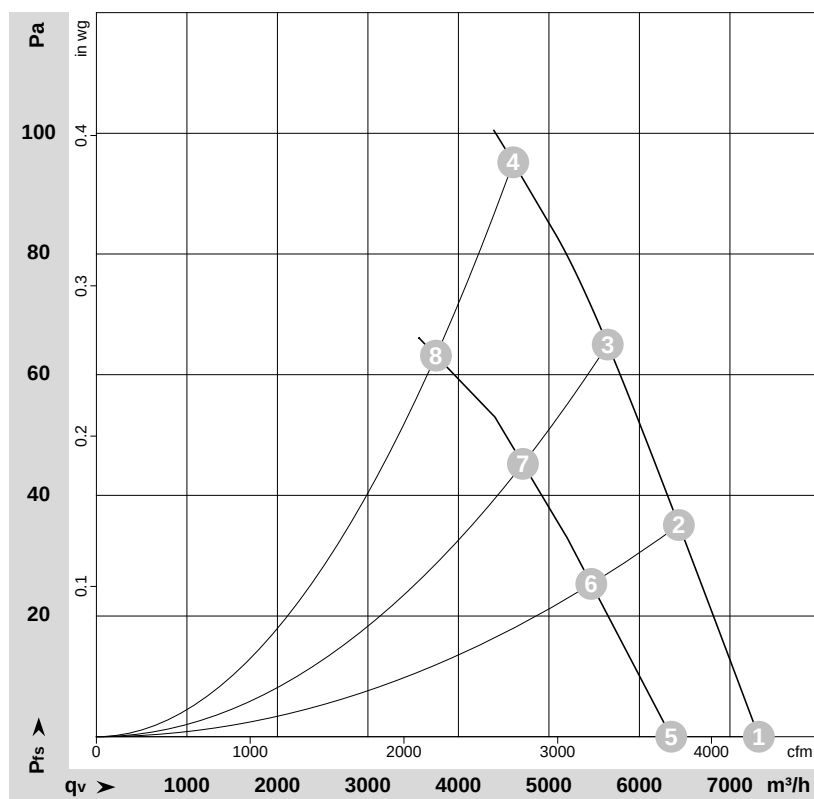

$\rho = 1,15 \text{ kg/m}^3 \pm 2\%$

Measurement: LU-152527

Measurement: LU-167955

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

|   | Conn. | U   | f  | n                 | P <sub>e</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | LwA <sub>out</sub> | qv   | p <sub>fs</sub> |
|---|-------|-----|----|-------------------|----------------|------|-------------------|-------------------|--------------------|------|-----------------|
|   |       | V   | Hz | min <sup>-1</sup> | W              | A    | dB(A)             | dB(A)             | dB(A)              | m³/h | Pa              |
| 1 | Δ     | 480 | 60 | 1120              | 314            | 0.62 | 65                | 72                | 71                 | 7320 | 0               |
| 2 | Δ     | 480 | 60 | 1110              | 350            | 0.65 | 62                | 69                | 69                 | 6435 | 35              |
| 3 | Δ     | 480 | 60 | 1100              | 378            | 0.67 | 60                | 67                | 67                 | 5650 | 65              |
| 4 | Δ     | 480 | 60 | 1090              | 410            | 0.72 | 59                | 66                | 66                 | 4605 | 95              |
| 5 | Y     | 480 | 60 | 975               | 234            | 0.33 | 62                | 69                | 68                 | 6350 | 0               |
| 6 | Y     | 480 | 60 | 940               | 257            | 0.36 | 59                | 65                | 65                 | 5470 | 25              |
| 7 | Y     | 480 | 60 | 915               | 272            | 0.38 | 56                | 63                | 63                 | 4715 | 45              |
| 8 | Y     | 480 | 60 | 880               | 290            | 0.41 | 54                | 61                | 61                 | 3750 | 63              |

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed · P<sub>e</sub> = Power input · I = Current draw · LpA<sub>in</sub> = Sound pressure level inlet side · LwA<sub>in</sub> = Sound power level inlet side  
LwA<sub>out</sub> = Sound power level outlet side · qv = Air flow · p<sub>fs</sub> = Pressure increase