

D1G160-DA33-19 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	D1G160-DA33-19	
Motor	M1G074-CF	
Nominal voltage	VDC	48
Nominal voltage range	VDC	36 .. 57
Frequency	Hz	-
Method of obtaining data		fa
Speed (rpm)	min ⁻¹	1250
Power consumption	W	112
Current draw	A	2.9
Min. back pressure	Pa	100
Min. back pressure	in. wg	0.4
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change




Technical description

Weight	3.96 kg
Size	160 mm
Motor size	74
Rotor surface	Painted black
Impeller material	Sheet steel, galvanized
Housing material	Sheet steel, galvanized
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP42
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H0+
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Technical features	- Tach output - Motor current limitation - Soft start - Control input 0-10 VDC / PWM
Electrical hookup	Connector with cable
Motor protection	Reverse polarity and locked-rotor protection
With cable	Variable
Protection class assignment	III; Requires supply with safety extra-low voltage SELV. This component to be built-in can have several local protection classes. This specification relates to the basic design of this component. The final protection class is based on the intended installation and connection of the components.
Approval	CSA C22.2 No. 77; CCC; UL 1004-1

Qingdao Haier Special Electrics Co.,Ltd

forward-curved, dual-intake
with housing (without flange)

Product drawing

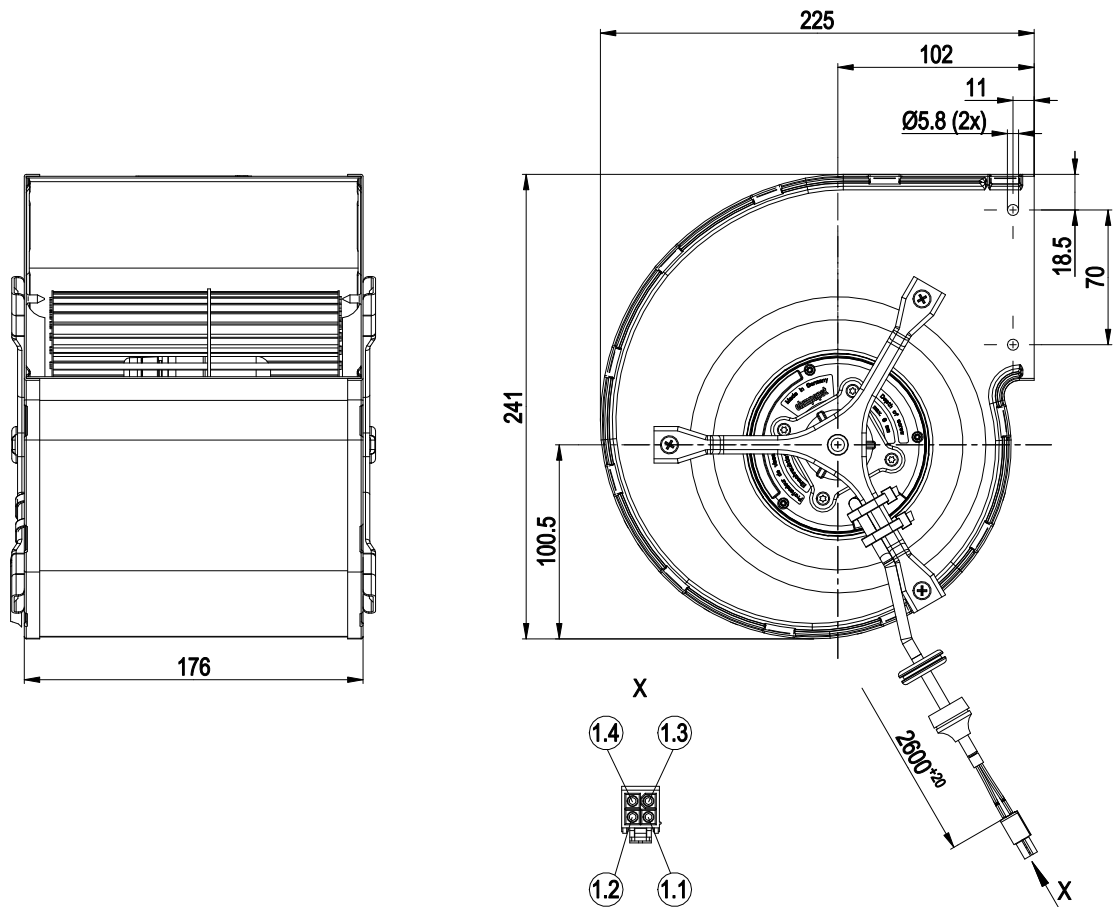

1	Cable PVC AWG20
	4-pole connector housing TE 172167-1, 4x socket TE 170362-1
1.1	GND (blue)
1.2	PWM/LIN (yellow)
1.3	DUE (white)
1.4	UN +48 VDC (red)


EC centrifugal fan

forward-curved, dual-intake
with housing (without flange)


Connection diagram

Customer circuit

full
speed




adjustable
speed




10 V $\rightarrow$ n = max
1 V $\rightarrow$ n = min
<1 V $\rightarrow$ n = 0
safe start
at Unom -30%
from 4 V Ucontr.

speed
adjustable via
potentiometer




speed
adjustable via
PWM 1-10 kHz



100% PWM $\rightarrow$ n = max
10% PWM $\rightarrow$ n = min
<10% PWM $\rightarrow$ n = 0
safe start
at Unom -30%
from 40% PWM


Set value requirement via
ebm-papst temperature
controller



$T < 10^{\circ}\text{C} \rightarrow$ n = 0
 $T > 45^{\circ}\text{C} \rightarrow$ n = max

Connection

Fan/Motor

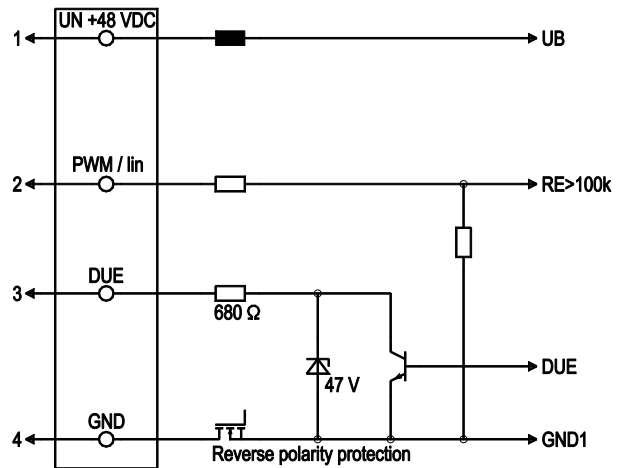


No.	Conn.	Designation	Color	Function/assignment
1	1	Un +48 VDC	red	Power supply 48 VDC, maximum ripple 3.5%
1	2	PWM / lin	yellow	PWM/lin. Control input, 0-10 V
1	3	DUE	white	Tach output, 3 pulses per revolution, Isink max = 10 mA
1	4	GND	blue	Reference ground

EC centrifugal fan

forward-curved, dual-intake
with housing (without flange)

Curves: Air performance

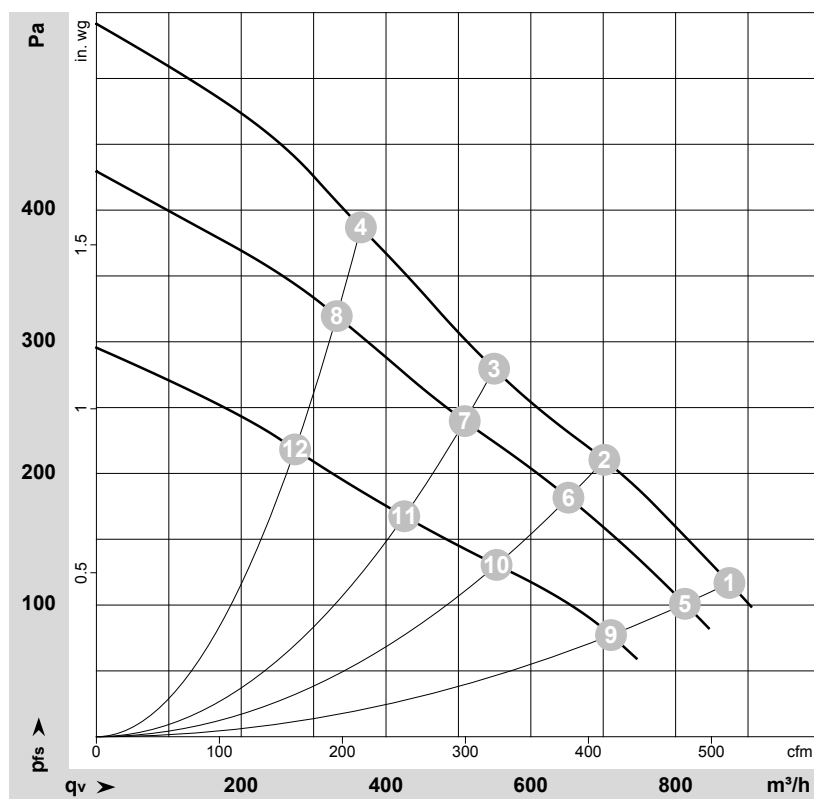

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-51358-1

Measurement: LU-51357-1

Measurement: LU-51359-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	n	P _{ed}	I	q _v	p _{fs}	q _v	p _{fs}
	V	min ⁻¹	W	A	m ³ /h	Pa	cfm	in. wg
1	57	1525	128	2.82	875	117	515	0.47
2	57	1735	118	2.50	700	211	415	0.85
3	57	1925	111	2.31	550	280	325	1.12
4	57	2155	105	2.15	365	387	215	1.55
5	48	1420	102	2.50	815	100	480	0.40
6	48	1610	94	2.28	650	180	385	0.72
7	48	1775	89	2.14	510	240	300	0.96
8	48	1950	78	1.89	330	320	195	1.28
9	36	1255	69	2.16	710	77	420	0.31
10	36	1390	60	1.90	555	130	325	0.52
11	36	1490	53	1.69	425	167	250	0.67
12	36	1620	46	1.49	275	218	160	0.88

U = Voltage · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase

