

AC centrifugal fan

forward-curved, dual-intake
with housing (without flange)

D2D133-AB26-11 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	D2D133-AB26-11		
Motor	M2D068-DF		
Phase		3~	3~
Nominal voltage	VAC	400	400
Wiring		Y	Y
Frequency	Hz	50	60
Method of obtaining data		ml	ml
Valid for approval/standard		CE	CE
Speed (rpm)	min ⁻¹	2150	2250
Power consumption	W	225	265
Current draw	A	0.36	0.41
Min. back pressure	Pa	100	150
Min. back pressure	inH ₂ O	0.4	0.6
Min. ambient temperature	°C	-25	-25
Max. ambient temperature	°C	70	45

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · oe = Customer equipment
Subject to change



AC centrifugal fan

forward-curved, dual-intake
with housing (without flange)

Technical description


Weight	3.7 kg
Fan size	133 mm
Rotor surface	Painted black
Impeller material	Sheet steel, galvanized
Housing material	Sheet steel, galvanized
Motor suspension	Motor vibration-damped on both sides
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP44; installation- and position-dependent
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	F5
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	< 0.75 mA
Motor protection	Thermal overload protector (TOP) with basic insulation
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1; CE



AC centrifugal fan

forward-curved, dual-intake
with housing (without flange)

Product drawing

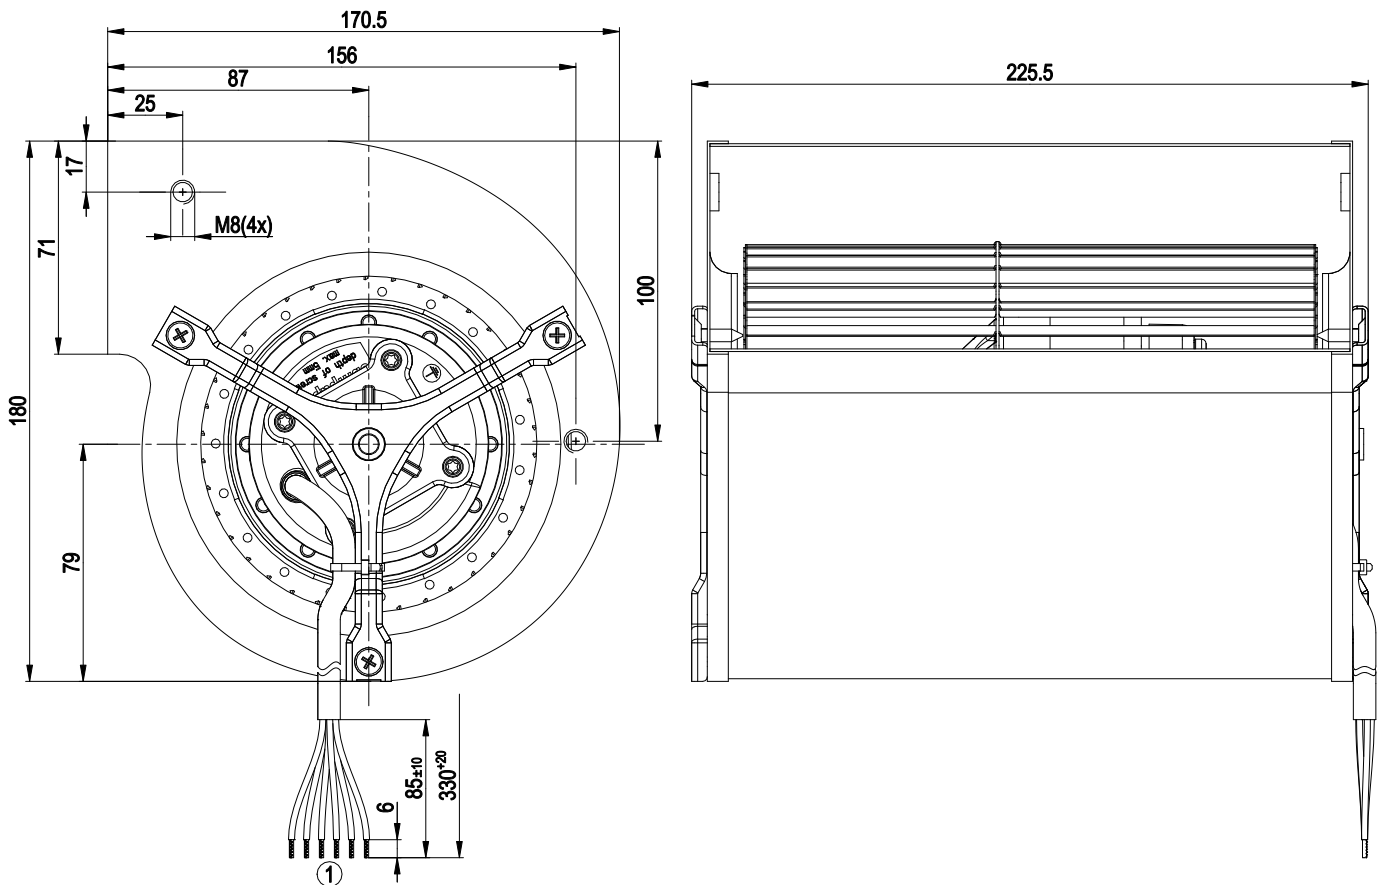


1 Cable halogen-free 6G 0.5 mm², 6x crimped splices

AC centrifugal fan

forward-curved, dual-intake
with housing (without flange)

Connection diagram




L1	= U1 = black	L2	= V1 = blue	L3	= W1 = brown
PE	green/yellow	TOP	2x gray	Y	Star connection



AC centrifugal fan

forward-curved, dual-intake
with housing (without flange)

Curves: Air performance 50 Hz Y

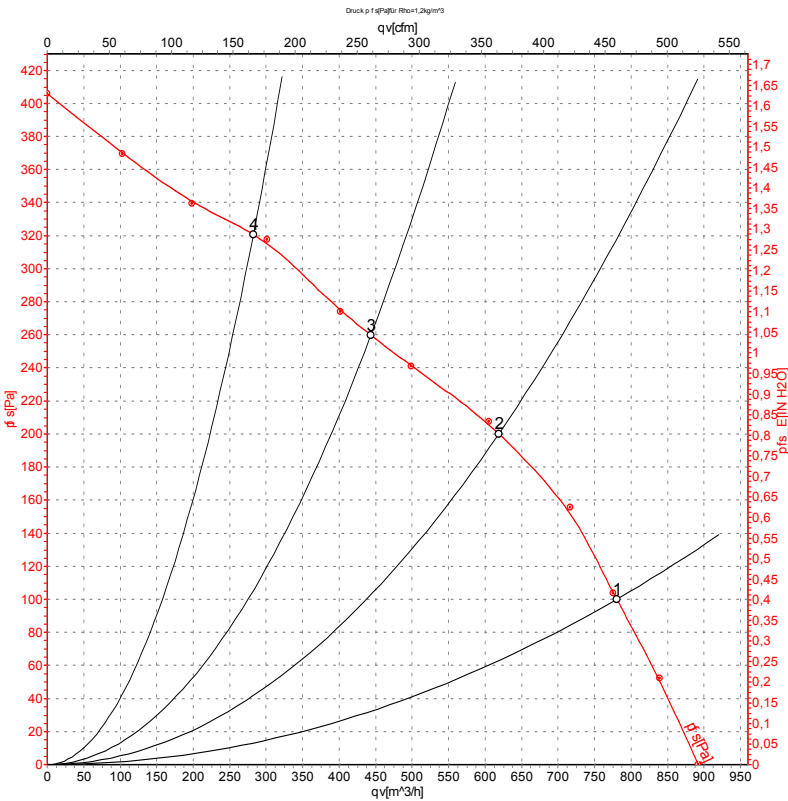

Measurement: LU-68644-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	qv	p _{fs}	qv	p _{fs}
		V	Hz	min ⁻¹	W	A	m³/h	Pa	CFM	inH ₂ O
1	Y	400	50	2150	225	0.36	780	100	460	0.40
2	Y	400	50	2395	177	0.30	620	200	365	0.80
3	Y	400	50	2575	136	0.25	445	260	260	1.04
4	Y	400	50	2725	97	0.21	280	320	165	1.28


Wired = Wiring · U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · qv = Air flow · p_{fs} = Pressure increase



AC centrifugal fan

forward-curved, dual-intake
with housing (without flange)

Curves: Air performance 60 Hz Y

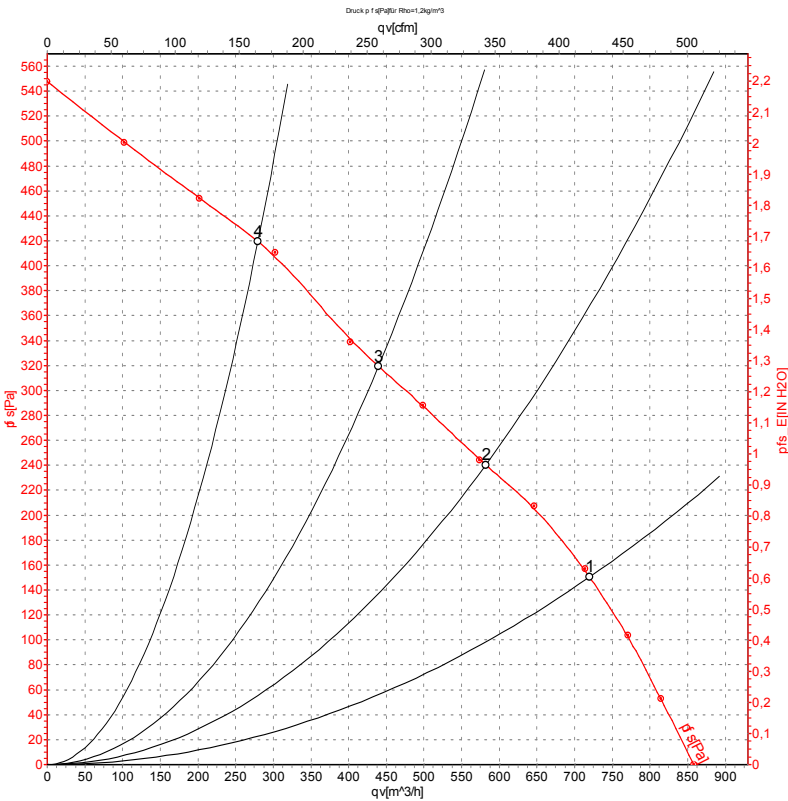

Measurement: LU-68645-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	qv	p _{fs}	qv	p _{fs}
		V	Hz	min ⁻¹	W	A	m³/h	Pa	CFM	inH2O
1	Y	400	60	2250	265	0.41	720	150	425	0.60
2	Y	400	60	2585	217	0.34	580	240	345	0.96
3	Y	400	60	2810	180	0.29	440	320	260	1.28
4	Y	400	60	3095	128	0.22	280	420	165	1.69

Wired = Wiring · U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · qv = Air flow · p_{fs} = Pressure increase

