

AC centrifugal fan

forward-curved, dual-intake

with housing (flange)

D2D133-DB04-22 ebmpapst Datasheet

sales@fansco.com

www.fansco.com



Nominal data

Type	D2D133-DB04-22		
Motor	M2D068-DF		
Phase		3~	3~
Nominal voltage	VAC	400	400
Wiring		Y	Y
Frequency	Hz	50	60
Method of obtaining data		fa	fa
Valid for approval/standard		CE	CE
Speed (rpm)	min ⁻¹	1850	2000
Power consumption	W	320	345
Current draw	A	0.5	0.53
Min. back pressure	Pa	0	100
Min. back pressure	inH ₂ O	0	0.4
Min. ambient temperature	°C	-25	-25
Max. ambient temperature	°C	45	35
Starting current	A	0.92	0.87

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to ErP Directive

		Actual	Req. 2015
01 Overall efficiency η_{es}	%	32.9	32.3
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		44.6	44
05 Variable speed drive		No	

Data obtained at optimum efficiency level.

The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

09 Power consumption P_e	kW	0.14
09 Air flow q_v	m ³ /h	510
09 Pressure increase p_{fs}	Pa	345
10 Speed (rpm) n	min ⁻¹	2590
11 Specific ratio*		1.00

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-61146



AC centrifugal fan

forward-curved, dual-intake

with housing (flange)

Technical description


Weight	4 kg
Fan size	133 mm
Rotor surface	Painted black
Impeller material	Sheet steel, painted black
Housing material	Sheet steel, galvanized
Motor suspension	Motor mounted with brackets on one side
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP44; installation- and position-dependent as per EN 60034-5
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	F2-2
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	< 0.75 mA
Motor protection	Thermal overload protector (TOP) with basic insulation
With cable	Axial
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1; CE



AC centrifugal fan

forward-curved, dual-intake
with housing (flange)

Product drawing

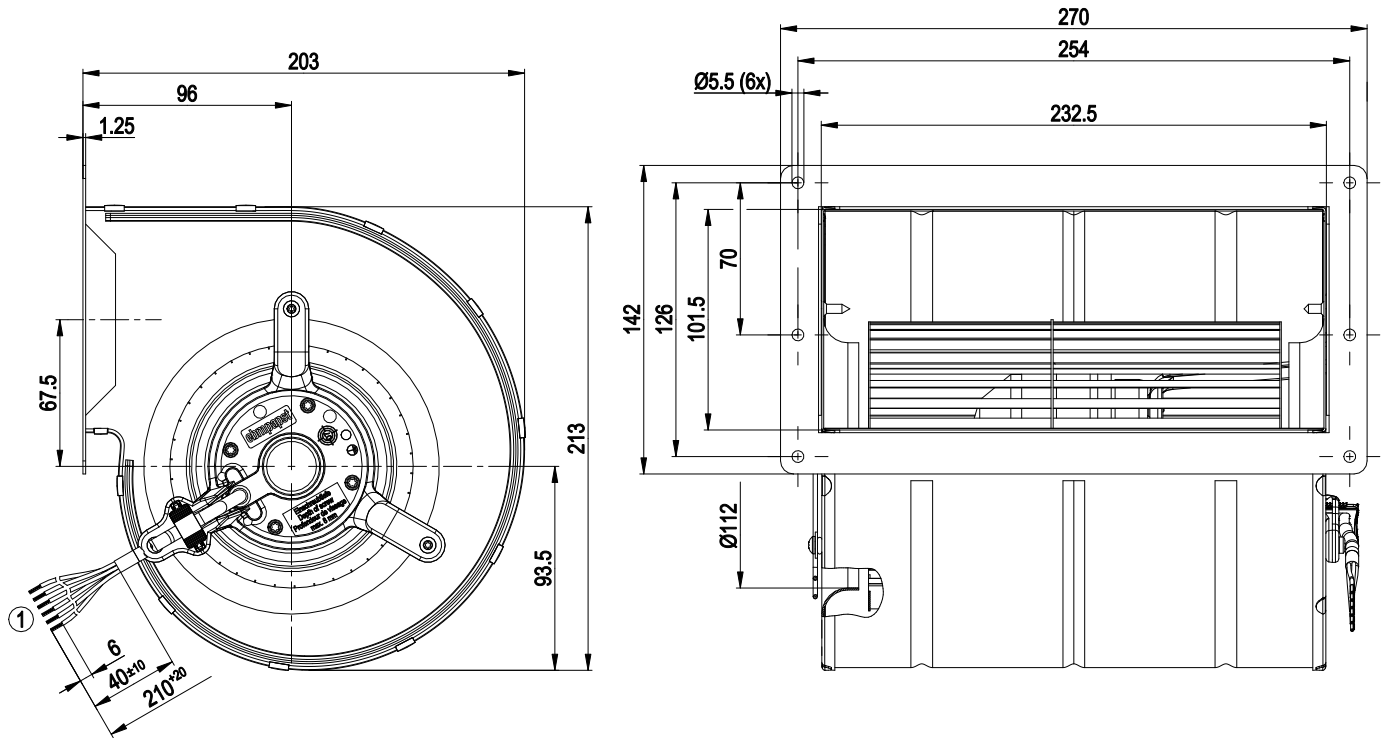


1 Cable halogen-silicone-free 6G 0.5 mm², 6x crimped splices

AC centrifugal fan

forward-curved, dual-intake
with housing (flange)

Connection diagram

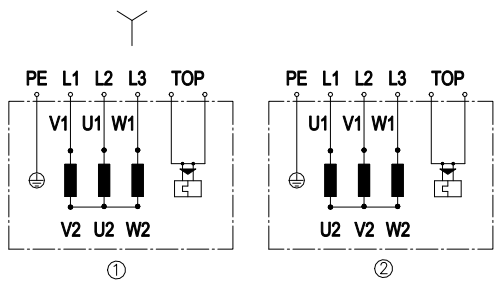

Change of rotation direction by reversing two phases


	Three-phase motor
Y	Star connection
1	Counterclockwise operation
L1	= V1 = blue
L2	= U1 = black
L3	= W1 = brown
2	Clockwise operation
L1	= U1 = black
L2	= V1 = blue
L3	= W1 = brown
PE	Green/yellow
TOP	2x gray



AC centrifugal fan

forward-curved, dual-intake
with housing (flange)

Curves: Air performance 50 Hz

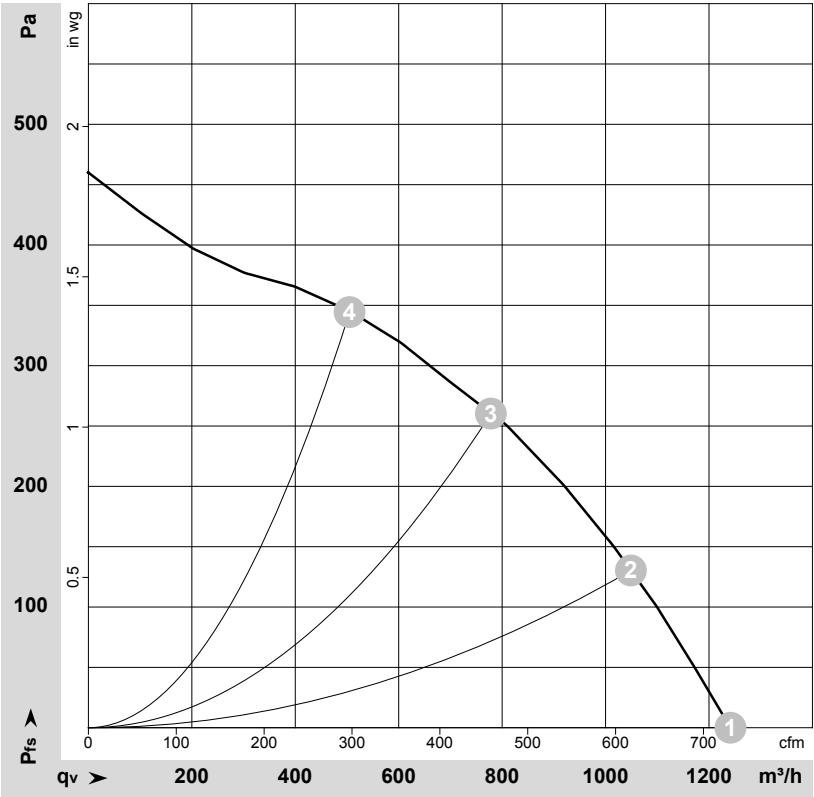

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-61146-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	qv	p _{fs}	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	m ³ /h	Pa	CFM	inH ₂ O
1	400	50	1850	320	0.50	1240	0	730	0.00
2	400	50	2110	266	0.42	1050	130	615	0.52
3	400	50	2370	203	0.34	780	261	460	1.05
4	400	50	2590	147	0.28	505	345	295	1.39


U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · qv = Air flow · p_{fs} = Pressure increase



AC centrifugal fan

forward-curved, dual-intake
with housing (flange)

Curves: Air performance 60 Hz

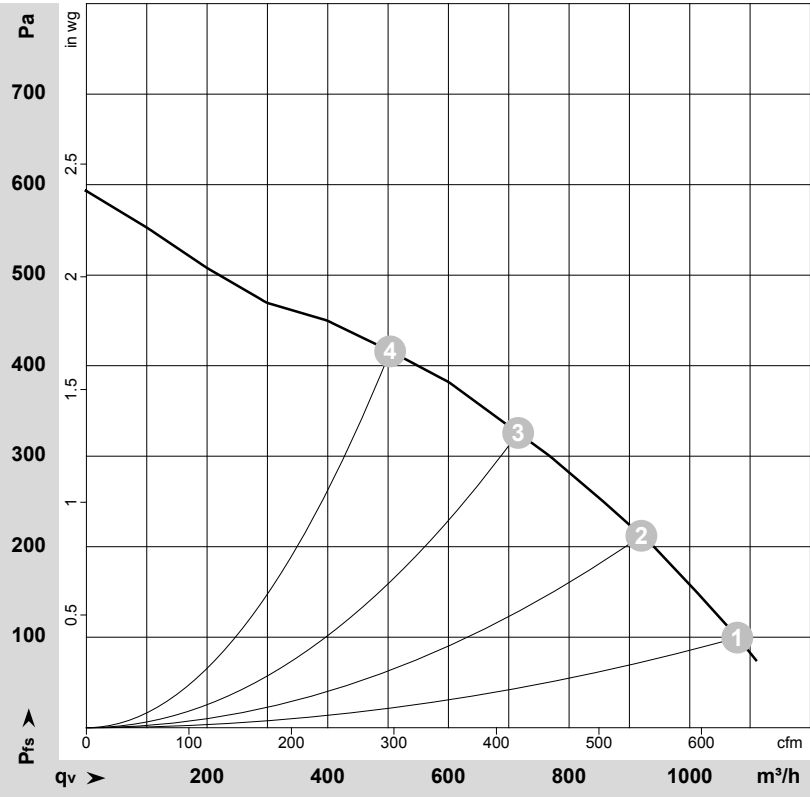

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-61147-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	q _v	p _{st}	q _v	p _{st}
	V	Hz	min ⁻¹	W	A	m³/h	Pa	CFM	inH2O
1	400	60	2000	345	0.53	1080	100	635	0.40
2	400	60	2280	298	0.46	920	212	540	0.85
3	400	60	2575	244	0.38	715	326	420	1.31
4	400	60	2830	196	0.31	505	416	295	1.67

U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · p_{st} = Pressure increase

