

AC centrifugal fan

forward-curved, dual-intake
with housing (without flange)

D2E133-AU40-A1 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	D2E133-AU40-A1		
Motor	M2E068-CF		
Phase		1~	1~
Nominal voltage	VAC	230	230
Frequency	Hz	50	60
Method of obtaining data		ml	ml
Valid for approval/standard		CE	CE
Speed (rpm)	min ⁻¹	1750	2000
Power consumption	W	125	135
Current draw	A	0.56	0.6
Capacitor	μF	2	2
Capacitor voltage	VDB	450	400
Capacitor standard		S0 (CE)	S0 (CE)
Min. back pressure	Pa	100	150
Min. back pressure	inH ₂ O	0.4	0.6
Min. ambient temperature	°C	-25	-25
Max. ambient temperature	°C	45	40

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



AC centrifugal fan

forward-curved, dual-intake
with housing (without flange)

Technical description


Weight	2.7 kg
Fan size	133 mm
Rotor surface	Unpainted
Impeller material	PA plastic
Housing material	Sheet steel, galvanized
Motor suspension	Motor vibration-damped on both sides
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP44; installation- and position-dependent
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H0 - dry environment
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	< 0.75 mA
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Axial
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1; CE



AC centrifugal fan

forward-curved, dual-intake
with housing (without flange)

Product drawing

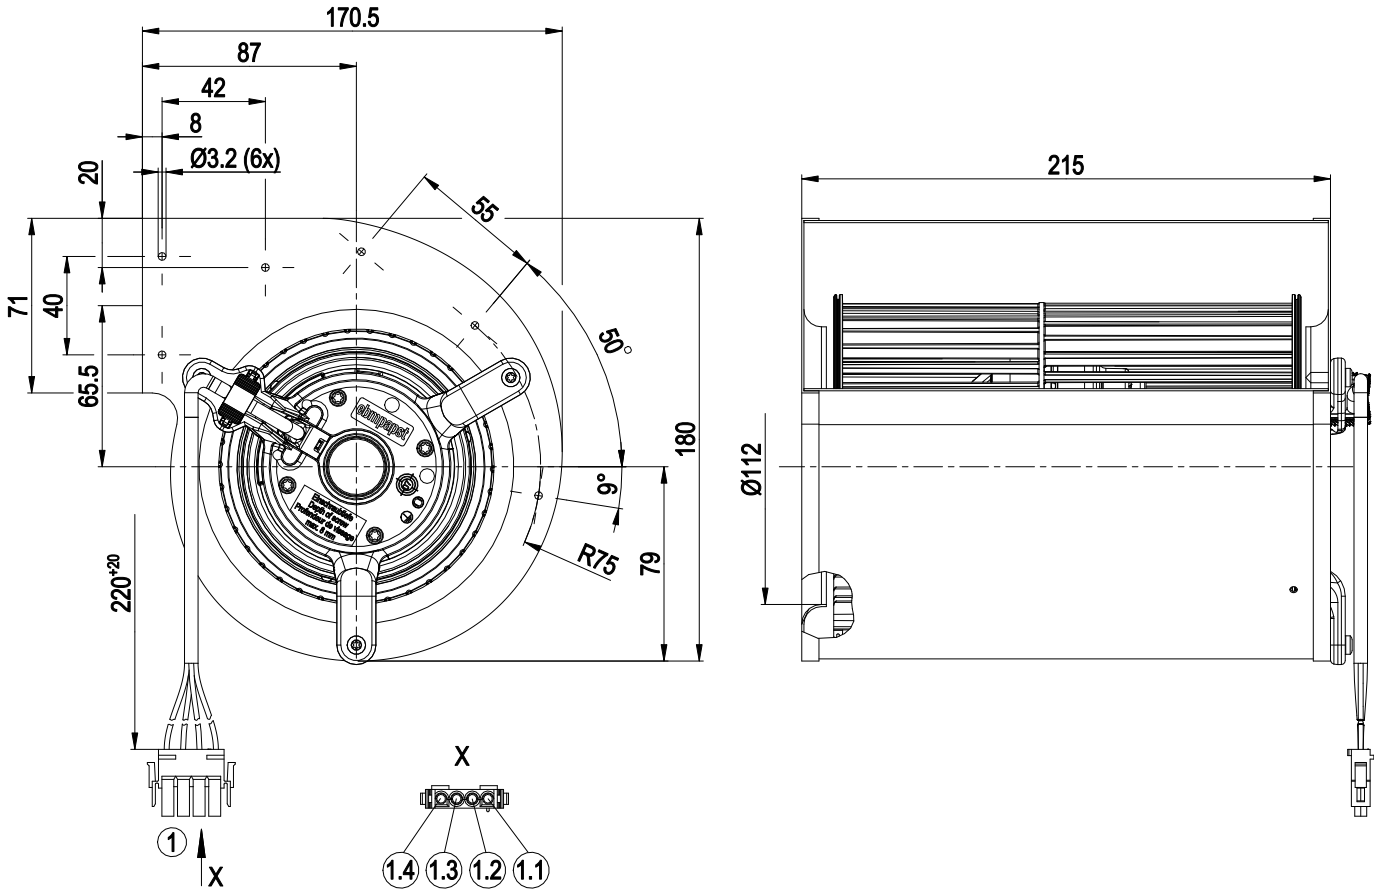


1	Cable PVC 4G 0.5 mm², 4-pole connector housing tyco 926298-7, 4x socket tyco 926884-1
1.1	L (blue)
1.2	Z (brown)
1.3	N (black)
1.4	PE (green/yellow)



AC centrifugal fan

forward-curved, dual-intake
with housing (without flange)

Connection diagram




U1	blue	Z	brown	U2	black
PE	green/yellow				



AC centrifugal fan

forward-curved, dual-intake
with housing (without flange)

Curves: Air performance 50 Hz

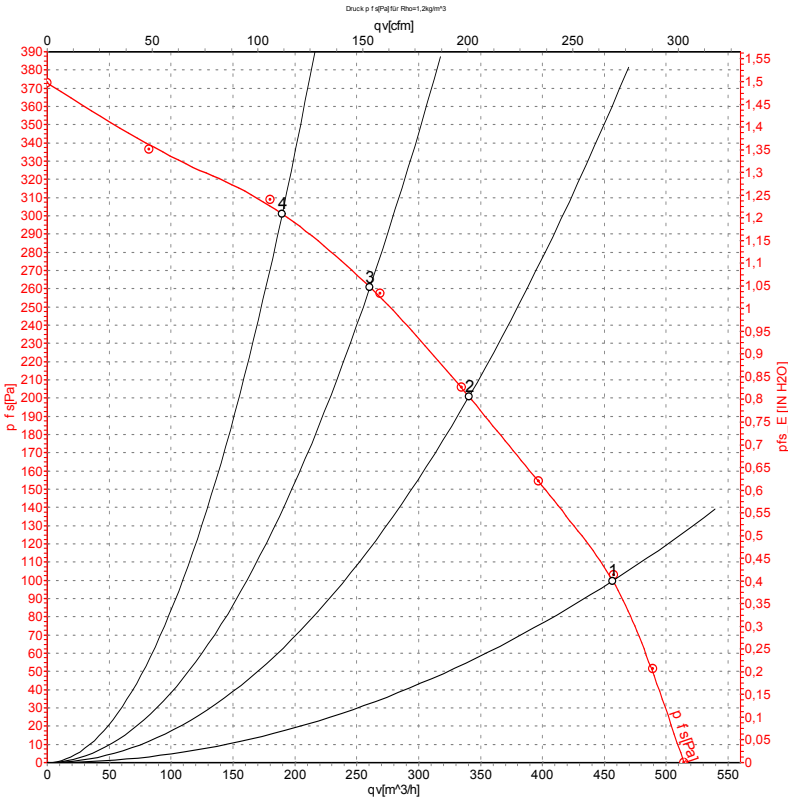

Measurement: LU-43701-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.


Measured values

	U	f	n	P _e	I	q _v	p _{1s}	q _v	p _{1s}
	V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	inH ₂ O
1	230	50	1750	125	0.56	455	100	270	0.40
2	230	50	2240	107	0.46	340	200	200	0.80
3	230	50	2460	95	0.41	260	260	155	1.04
4	230	50	2610	83	0.36	190	300	110	1.20

U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · p_{1s} = Pressure increase



Curves: Air performance 60 Hz

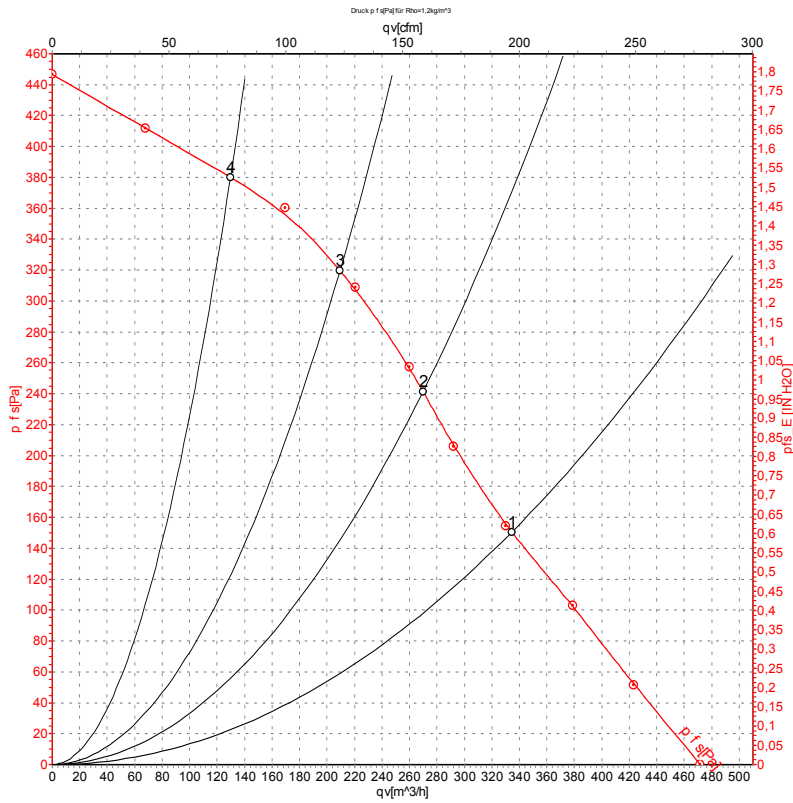

Measurement: LU-43702-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	q _V	p _{fs}	q _V	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	inH ₂ O
1	230	60	2000	135	0.60	335	150	195	0.60
2	230	60	2365	128	0.56	270	240	160	0.96
3	230	60	2670	121	0.53	210	320	125	1.28
4	230	60	2885	115	0.50	130	380	75	1.53

U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_V = Air flow · p_{fs} = Pressure increase