

EC centrifugal fan

forward-curved, dual-intake

with housing (flange)

D3G133-CF17-23 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	D3G133-CF17-23	
Motor	M3G055-CF	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		ml
Status		prelim.
Speed (rpm)	min ⁻¹	2200
Power consumption	W	115
Current draw	A	1.0
Min. back pressure	Pa	160
Min. back pressure	in. wg	0.64
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	35

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change




Technical description

Weight	2.8 kg
Size	133 mm
Motor size	55
Rotor surface	Thick-film passivated
Impeller material	Sheet steel, galvanized
Housing material	Sheet steel, galvanized
Motor suspension	Motor mounted with brackets on one side
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H0 - dry environment
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Cooling hole/opening	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 10 mA - Fault output (open collector) - Power limiter - Motor current limitation - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Overvoltage detection - Thermal overload protection for electronics/motor - Line undervoltage detection
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Connector with cable
Motor protection	Electronic motor protection
With cable	Lateral
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1; CE

EC centrifugal fan

forward-curved, dual-intake
with housing (flange)

Product drawing

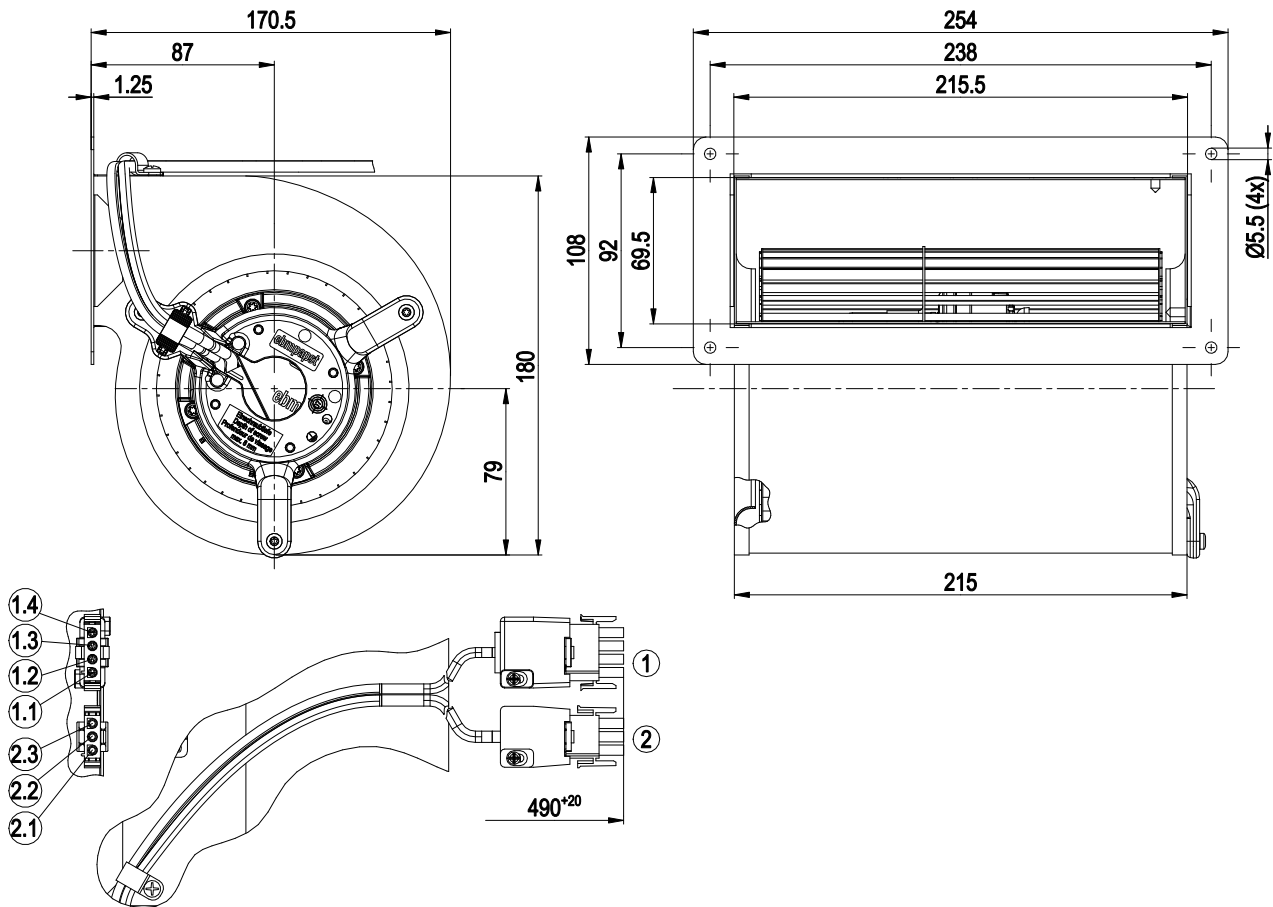

1	Cable halogen-free, 4x 0.25 mm ²
	4-pole connector housing TE 350779-5, 4x plug pin TE 926885-1
1.1	+10 V (red)
1.2	Fan good / fan bad (white)
1.3	0-10 V/PWM (yellow)
1.4	GND (blue)
2	Cable halogen-free, 3G 0.5 mm ²
	3-pole connector housing TE 2178473-3, 3x plug pin TE 926885-1
2.1	L (brown)
2.2	PE (green/yellow)
2.3	N (blue)




EC centrifugal fan

forward-curved, dual-intake

with housing (flange)

Connection diagram

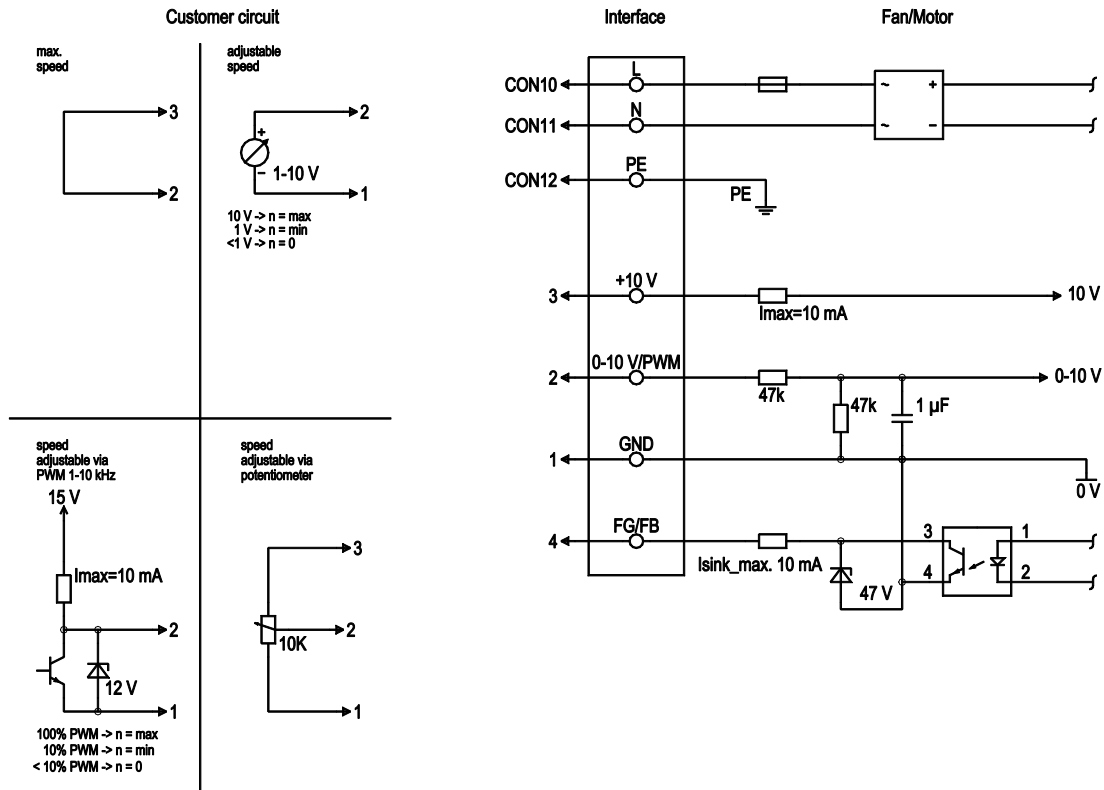


No.	Conn.	Designation	Color	Function/assignment
	CON10	L	brown	Supply connection, power supply, phase, see nameplate for voltage range
	CON11	N	blue	Supply connection, power supply, neutral conductor, see nameplate for voltage range
	CON12	PE	green/yellow	Ground connection
	2	0- 10V PWM	yellow	0-10 V / PWM control input, R _i =100 kΩ, SELV
	4	FG/FB	white	Fan good / fan bad: open collector, fan good = low, electrically isolated, I _{sink max} = 10 mA, SELV
	3	+10 V	red	Fixed voltage output 10 VDC +/-3%, I _{max.} 10 mA, short-circuit-proof, power supply for ext. devices (e.g. potentiometers), SELV
	1	GND	blue	Reference ground for control interface, SELV

EC centrifugal fan

forward-curved, dual-intake
with housing (flange)

Curves: Air performance 50 Hz

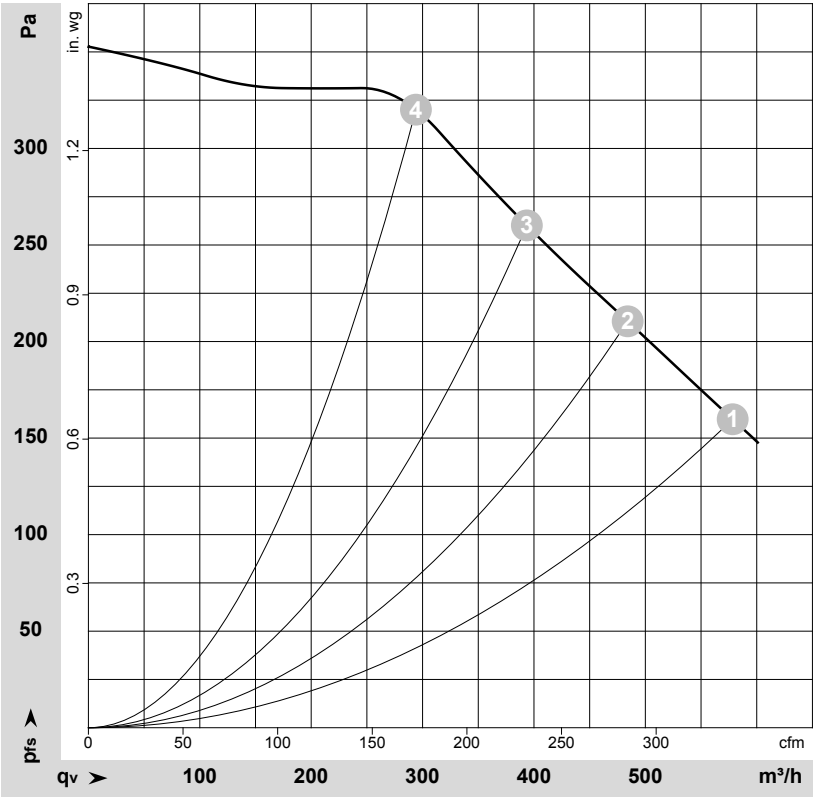

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-188877-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m ³ /h	Pa	cfm	in. wg
1	1~	230	50	2200	115	1.00	59	70	580	160	340	0.64
2	1~	230	50	2400	115	1.00	60	71	485	210	285	0.84
3	1~	230	50	2605	108	0.90	61	71	395	260	230	1.04
4	1~	230	50	2785	90	0.77	61	71	295	320	175	1.28

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
q_v = Air flow · p_{fs} = Pressure increase

