

EC centrifugal fan

forward-curved, dual-intake

with housing (flange)

D3G133-DD10-07 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	D3G133-DD10-07	
Motor	M3G074-CF	
Nominal voltage	VDC	110
Nominal voltage range	VDC	93 .. 127
Method of obtaining data		cs
Speed (rpm)	min ⁻¹	2580
Power consumption	W	145
Current draw	A	1.32
Min. back pressure	Pa	320
Min. back pressure	inH ₂ O	1.28
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	50

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to ErP Directive

		Actual	Req. 2015
01 Overall efficiency η_{es}	%	44.6	34
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		54.6	44
05 Variable speed drive		Yes	

Data obtained at optimum efficiency level.

The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

09 Power consumption P_e	kW	0.26
09 Air flow q_v	m ³ /h	755
09 Pressure increase p_{fs}	Pa	500
10 Speed (rpm) n	min ⁻¹	3215
11 Specific ratio*		1.01

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-36649



EC centrifugal fan

forward-curved, dual-intake
with housing (flange)

Technical description


Weight	3.7 kg
Fan size	133 mm
Rotor surface	Painted black
Impeller material	Sheet steel, galvanized
Housing material	Sheet steel, galvanized
Motor suspension	Motor mounted on brackets for one-sided vibration damping
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP42; installation- and position-dependent
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	F5
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Motor protection	Thermal overload protector (TOP) internally connected
Protection class	I (with customer connection of protective earth)



EC centrifugal fan

forward-curved, dual-intake
with housing (flange)

Product drawing

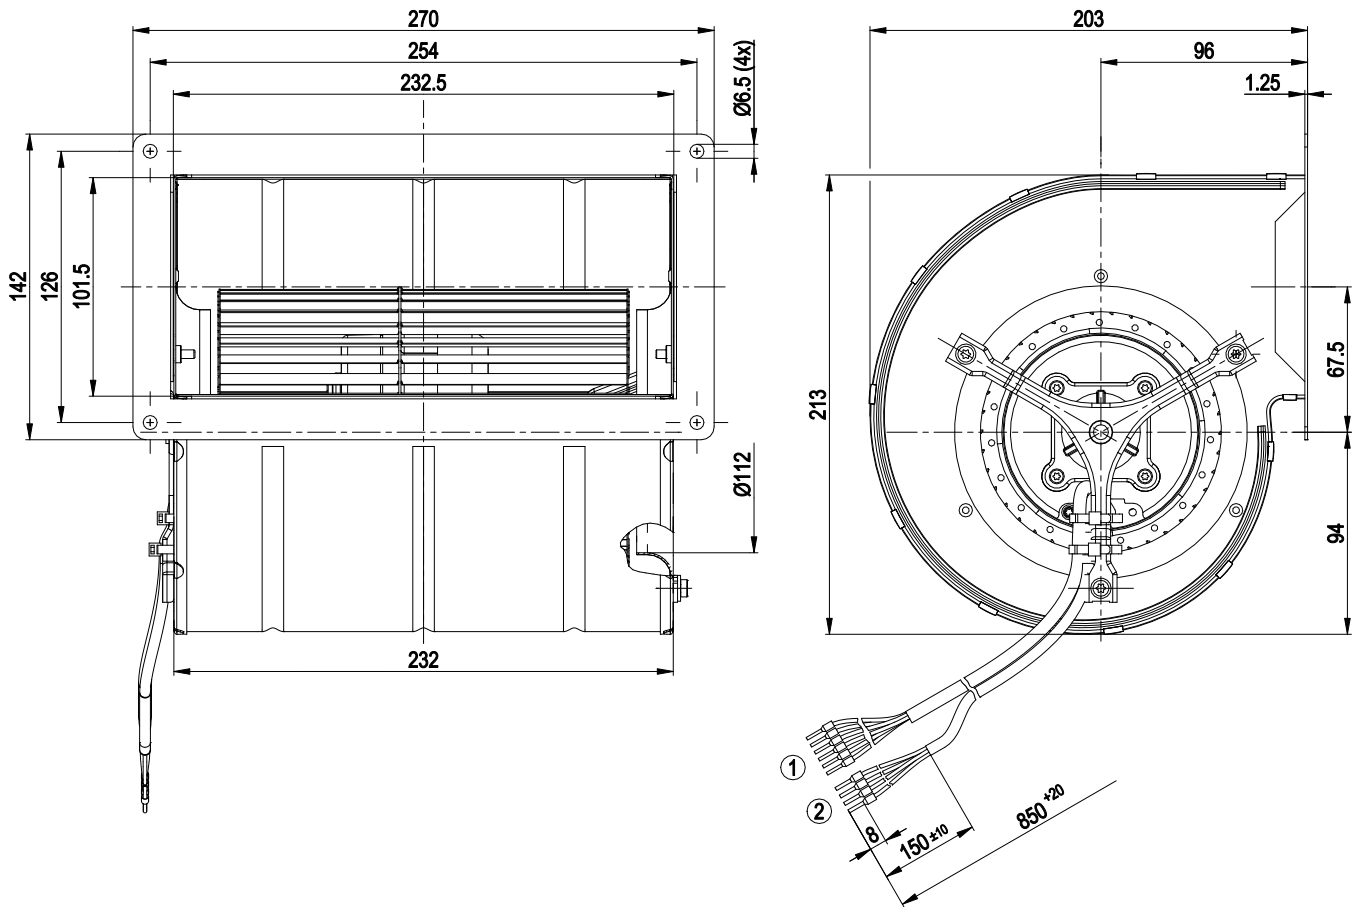


- | | |
|---|--|
| 1 | Cable halogen-free XLPE/XLPO 6G 0.5 mm ² , 6x crimped splices |
| 2 | Cable halogen-free XLPE/XLPO 4G 0.75 mm ² , 4x crimped ferrules |

EC centrifugal fan

forward-curved, dual-intake
with housing (flange)

Connection diagram

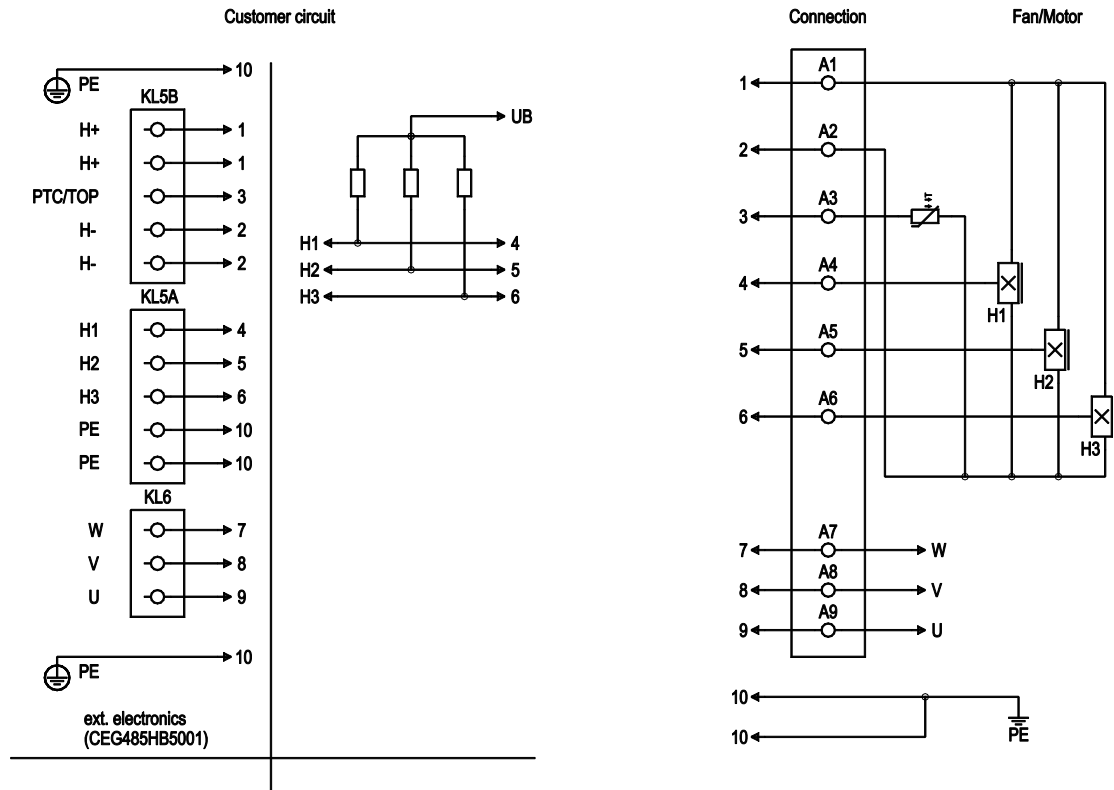


No.	Conn.	Designation	Function/assignment
KL5B	1	A1	+ (red)
KL5B	2	A2	- (blue)
KL5B	3	A3	PTC (black)
KL5A	4	A4	Hall 1 (gray) collector open, R to UB 4.5-24 V
KL5A	5	A5	Hall 2 (brown) collector open, R to UB 4.5-24 V
KL5A	6	A6	Hall 3 (yellow) collector open, R to UB 4.5-24 V
KL6	7	A7	W (brown)
KL6	8	A8	V (blue)
KL6	9	A9	U (black)
	10	10	PE (green/yellow)

EC centrifugal fan

forward-curved, dual-intake
with housing (flange)

Curves: Air performance

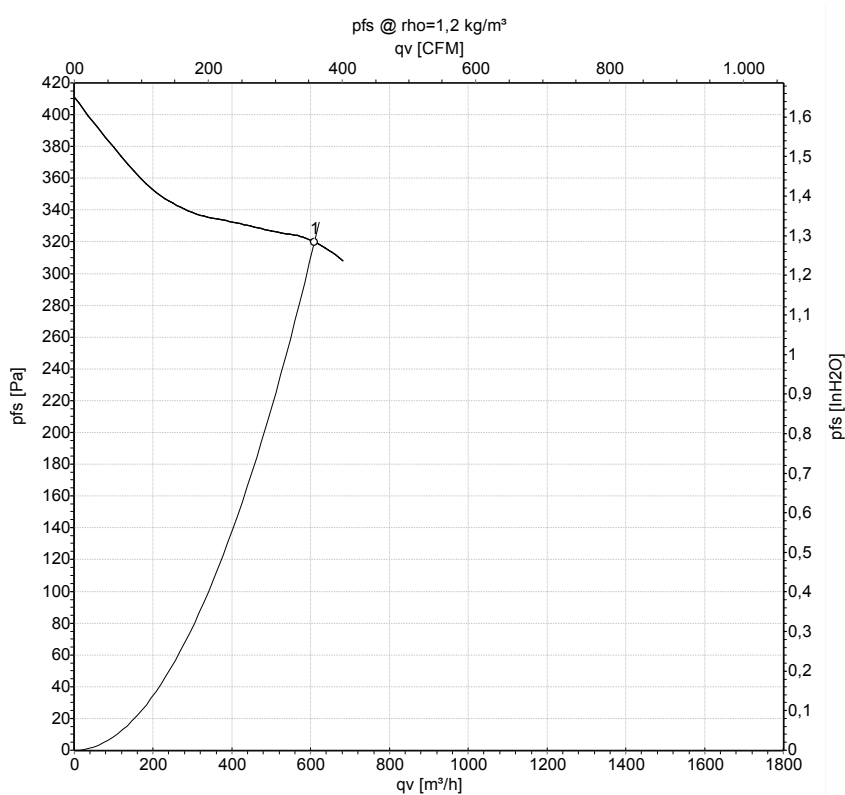

Measurement: LU-36013-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	n	P _{ed}	I	qv	p _{fs}	qv	p _{fs}
	V	min ⁻¹	W	A	m ³ /h	Pa	CFM	inH ₂ O
1	110	2580	145	1.32	610	320	360	1.28

U = Power supply · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · qv = Air flow · p_{fs} = Pressure increase

