

EC centrifugal fan

forward curved, dual inlet

with housing (flange)

D3G146-AG61-11 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Limited partnership · Headquarters Muldingen
County court Stuttgart · HRA 590344General partner Elektrobau Muldingen GmbH · Headquarters Muldingen
County court Stuttgart · HRB 590142

Nominal data

| | | |
|---------------------------|-----------------------|------------|
| Type | D3G146-AG61-11 | |
| Motor | M3G074-CF | |
| Phase | | 1~ |
| Nominal voltage | VAC | 230 |
| Nominal voltage range | VAC | 200 .. 277 |
| Frequency | Hz | 50/60 |
| Type of data definition | | ml |
| Speed (rpm) | min ⁻¹ | 2000 |
| Power input | W | 176 |
| Current draw | A | 1.3 |
| Min. ambient temperature | °C | -25 |
| Max. ambient temperature | °C | 60 |
| Min. temp. of flow medium | °C | -25 |
| Max. temp. of flow medium | °C | 60 |

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations

EC centrifugal fan

forward curved, dual inlet
with housing (flange)

Technical features


| | |
|---|---|
| Mass | 3.1 kg |
| Size | 146 mm |
| Surface of rotor | Galvanised |
| Material of impeller | Sheet steel, hot-galvanised |
| Direction of rotation | Counter-clockwise, seen on rotor |
| Type of protection | IP 44; Depending on installation and position |
| Insulation class | "B" |
| Humidity (F)/environmental protection class (H) | F3-1 |
| Max. permissible ambient motor temp. (transp./ storage) | + 80 °C |
| Min. permissible ambient motor temp. (transp./storage) | - 40 °C |
| Mounting position | Any |
| Condensate discharge holes | None |
| Operation mode | S1 |
| Motor bearing | Ball bearing |
| Technical features | <ul style="list-style-type: none"> - Motor current limit - Soft start - Control input 0-10 VDC / PWM - Over-temperature protected electronics / motor |
| EMC interference immunity | Acc. to EN 61000-6-2 |
| EMC harmonics | Acc. to EN 61000-3-2/3 |
| EMC interference emission | Acc. to EN 61000-6-3 (household environment) |
| Touch current acc. IEC 60990 (measuring network Fig. 4, TN system) | <= 3.5 mA |
| Electrical leads | With plug |
| Motor protection | Thermal overload protector (TOP) wired internally |
| Cable exit | Variable |
| Protection class | I (if protective earth is connected by customer) |
| Product conforming to standard | EN 60335-1; CE |



EC centrifugal fan

forward curved, dual inlet
with housing (flange)

Product drawing

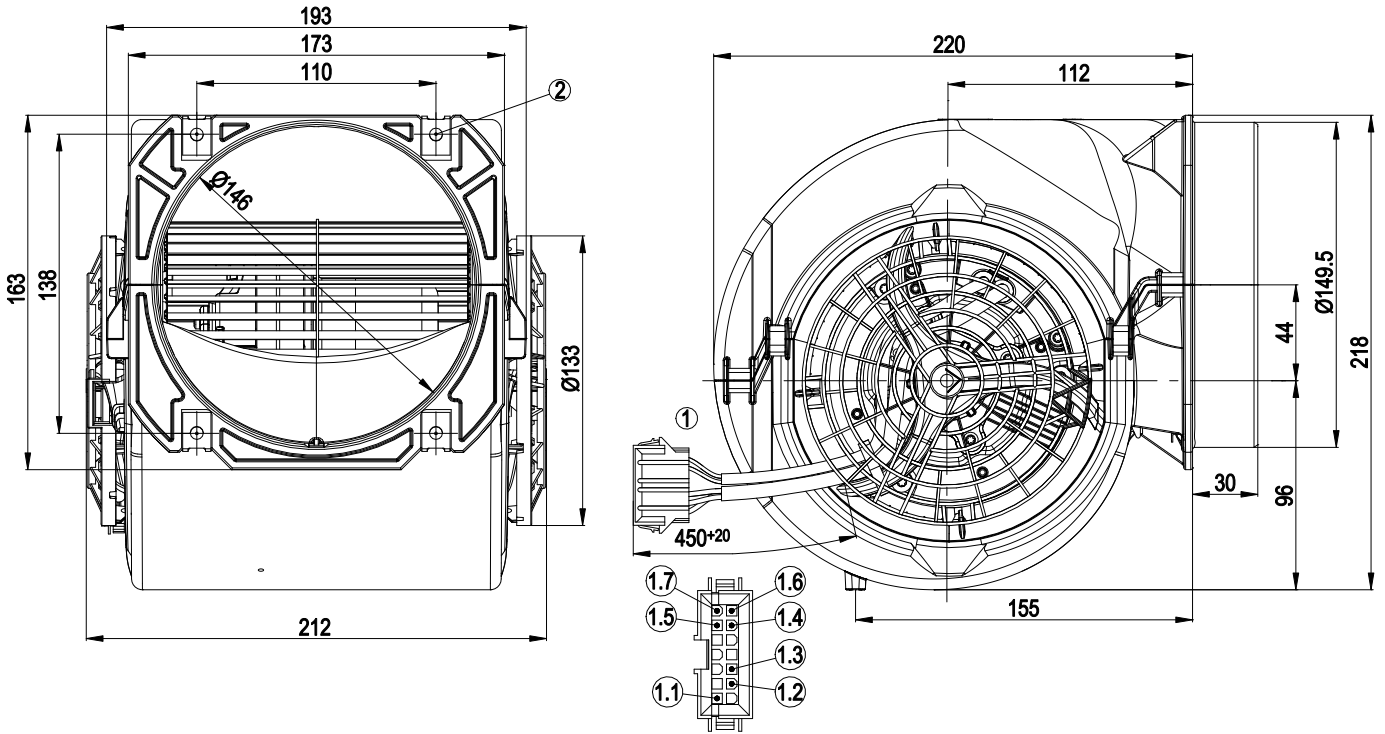


| | |
|-----|--|
| 1 | Connection line AWG18, 3 x crimped core-end sleeves |
| 1.1 | N (blue) |
| 1.2 | L (black) |
| 1.3 | PE (green / yellow) |
| 1.4 | Tach (white) |
| 1.5 | PWM (yellow) |
| 1.6 | + 10V DC (red) |
| 1.7 | GND (blue) |
| 2 | 4 x sheet metal nut for thread EN ISO 1478-ST4.8 (min. screw length 14.5 mm plus thickness of mounting material) |



EC centrifugal fan

forward curved, dual inlet
with housing (flange)

Connection screen

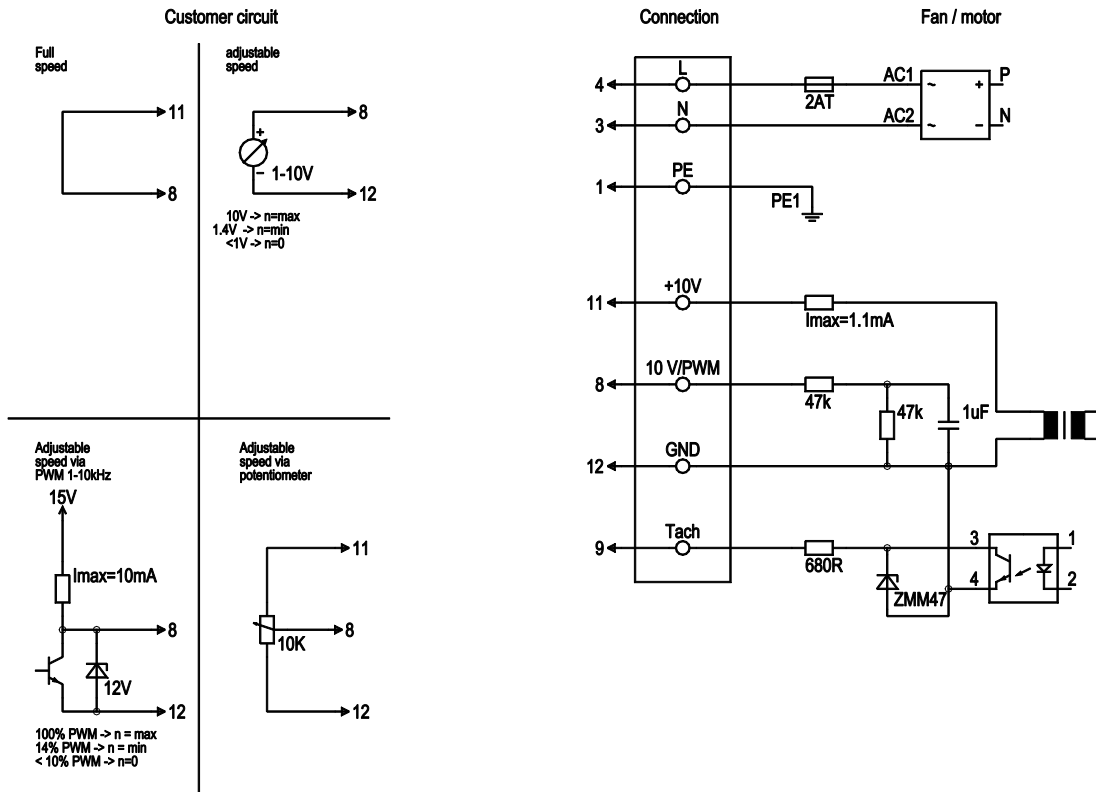

| No. | Conn. | Designation | Colour | Function / assignment |
|-----|-------|------------------|--------------|--|
| | 4 | L | black | Power supply 230 VAC, 50-60 Hz, see type plate for voltage range |
| | 3 | N | blue | Neutral conductor |
| | 1 | PE | green/yellow | Protective earth |
| | 8 | 0-10 V PWM | yellow | Control input 0 - 10 V or PWM, electrically isolated |
| | 9 | Tach | white | Tach output: open collector, 1 pulse per revolution, electrically isolated |
| | 11 | 10V / max 1.1 mA | red | Voltage output 10 V / max. 1.1 mA, electrically isolated |
| | 12 | GND | blue | GND - Connection for control interface |




EC centrifugal fan

forward curved, dual inlet

with housing (flange)

Charts: Air flow 50 Hz

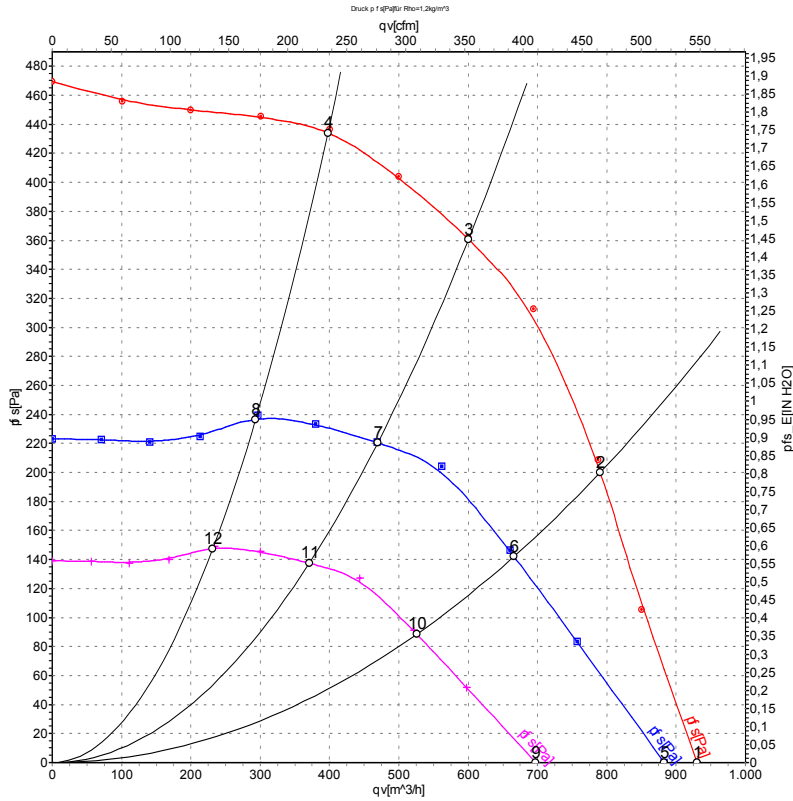

Measurement: LU-117305-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebmpapst. Suction-side noise levels: L_{WA} measured as per ISO 13347 / L_{pA} measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

| | U | f | n | P _{ed} | I | q _v | P _{fs} | q _v | P _{fs} |
|----|-----|----|-------------------|-----------------|------|-------------------|-----------------|----------------|-----------------|
| | V | Hz | min ⁻¹ | W | A | m ³ /h | Pa | cfm | inH2O |
| 1 | 230 | 50 | 2000 | 176 | 1.30 | 930 | 0 | 545 | 0.00 |
| 2 | 230 | 50 | 2260 | 173 | 1.26 | 790 | 200 | 465 | 0.80 |
| 3 | 230 | 50 | 2430 | 145 | 1.07 | 600 | 360 | 355 | 1.45 |
| 4 | 230 | 50 | 2570 | 110 | 0.82 | 395 | 435 | 235 | 1.75 |
| 5 | 230 | 50 | 1900 | 150 | 1.08 | 885 | 0 | 520 | 0.00 |
| 6 | 230 | 50 | 1900 | 103 | 0.75 | 665 | 143 | 390 | 0.57 |
| 7 | 230 | 50 | 1900 | 69 | 0.51 | 470 | 221 | 275 | 0.89 |
| 8 | 230 | 50 | 1900 | 45 | 0.33 | 295 | 239 | 170 | 0.96 |
| 9 | 230 | 50 | 1500 | 74 | 0.53 | 695 | 0 | 410 | 0.00 |
| 10 | 230 | 50 | 1500 | 51 | 0.37 | 525 | 89 | 310 | 0.36 |
| 11 | 230 | 50 | 1500 | 34 | 0.25 | 370 | 138 | 220 | 0.55 |
| 12 | 230 | 50 | 1500 | 22 | 0.16 | 230 | 149 | 135 | 0.60 |

U = Supply voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power input · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase

