

EC centrifugal fan

forward-curved
with housing (flange)

D3G146-HQ13-35 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	D3G146-HQ13-35	
Motor	M3G055-DF	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	2320
Power consumption	W	227
Current draw	A	1.75
Min. back pressure	Pa	0
Min. back pressure	inH ₂ O	0
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	50

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to ErP Directive

		Actual	Req. 2015
01 Overall efficiency η_{es}	%	47.9	33
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		58.9	44
05 Variable speed drive		Yes	

Data obtained at optimum efficiency level.
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

09 Power consumption P_{ed}	kW	0.18
09 Air flow q_v	m ³ /h	645
09 Pressure increase p_{fs}	Pa	447
10 Speed (rpm) n	min ⁻¹	2595
11 Specific ratio*		1.01

* Specific ratio = $1 + p_s / 100\,000\text{ Pa}$

LU-133567




Technical description

Weight	2.4 kg
Fan size	146 mm
Rotor surface	Galvanized
Electronics housing material	PP plastic
Impeller material	PP plastic
Housing material	PP plastic
Motor suspension	Motor vibration-damped on both sides
Direction of rotation	Counterclockwise, viewed toward rotor
Insulation class	"F"
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 1.1 mA - Tach output - Motor current limitation - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Thermal overload protection for motor
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC interference emission	According to EN 61000-6-4 (industrial environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Via terminal box; With plug
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1; EN 60335-2-31
Approval	VDE

EC centrifugal fan

forward-curved
with housing (flange)

Product drawing

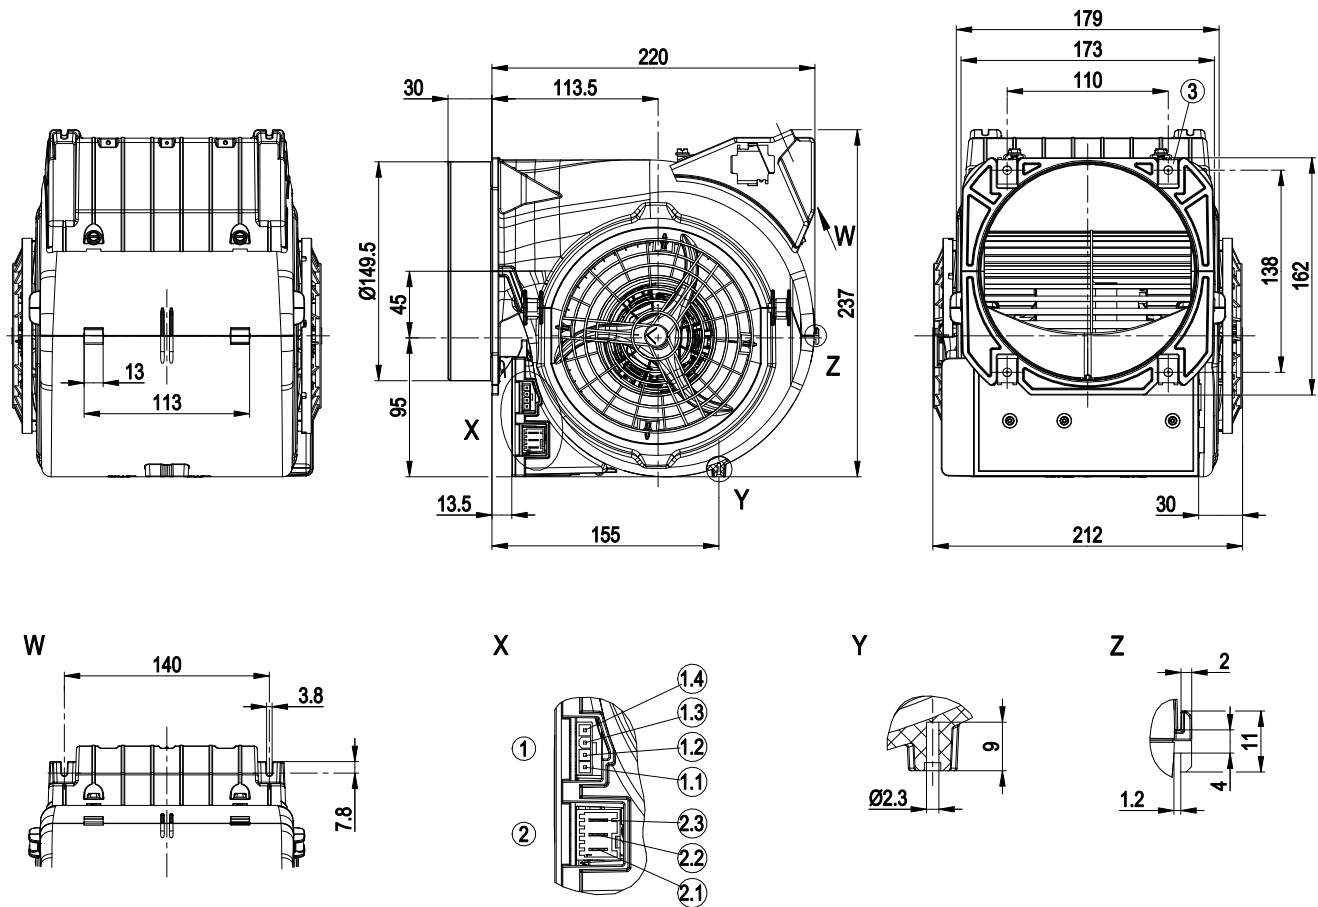


1	Header Stocko MSLO 7708-004-003-960 pluggable with Stocko EH 705-004-003-960 + RBB 8230.120 Ms
1.1	10V
1.2	Tach
1.3	0-10 V / PWM
1.4	GND
2	Macromodul connector Stocko MSLO 9404-003-00A-960 pluggable with Stocko MFMP 9761-003-50A-960
2.1	L
2.2	N
2.3	PE
3	4x sheet metal nut for thread EN ISO 1478-ST4.8



EC centrifugal fan


forward-curved
with housing (flange)

Connection diagram

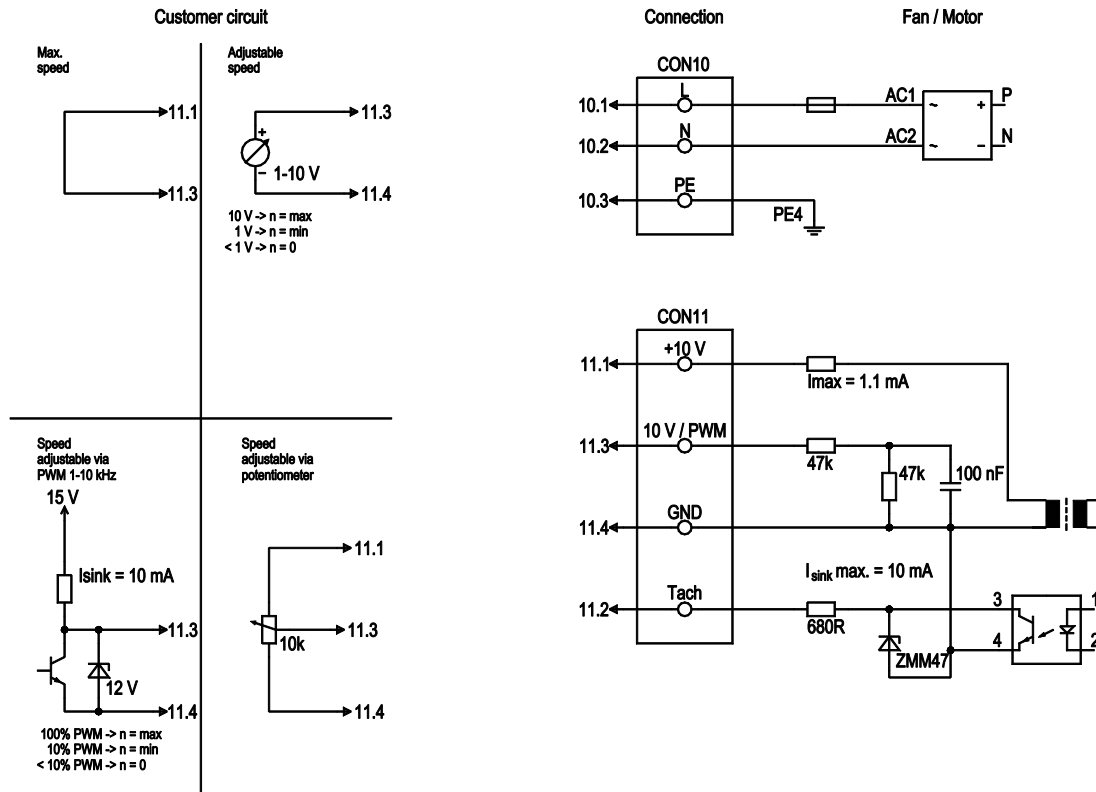

No.	Conn.	Designation	Color	Function/assignment
CON10	10.1	L	black	Power supply 230 VAC, 50-60 Hz, see nameplate for voltage range
CON10	10.2	N	blue	Neutral conductor
CON10	10.3	PE	green/yellow	Protective earth
CON11	11.1	10 V/max. 1.1mA	red	Voltage output 10 V / 1.1 mA, electrically isolated, not short-circuit-proof
CON11	11.2	Tacho	white	Tach output: Open collector, 1 pulse per revolution, electrically isolated, Isink max = 10 mA
CON11	11.3	0-10 V PWM	yellow	Control input 0-10 V or PWM, electrically isolated
CON11	11.4	GND	blue	GND connection for control interface

Curves: Air performance 50 Hz

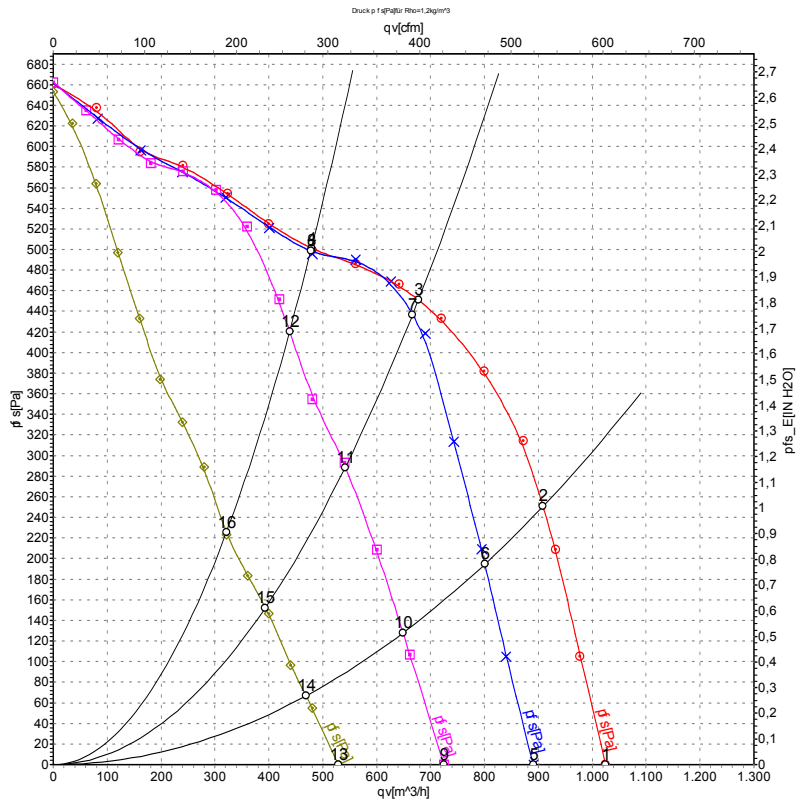

Measurement: LU-133567-1
 Measurement: LU-133570-1
 Measurement: LU-133571-1
 Measurement: LU-133572-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _{ed}	I	qv	p _{is}	qv	p _{is}
	V	Hz	min ⁻¹	W	A	m³/h	Pa	CFM	inH ₂ O
1	230	50	1800	187	1.44	1025	0	605	0.00
2	230	50	2320	227	1.75	910	250	535	1.00
3	230	50	2555	195	1.50	675	450	400	1.81
4	230	50	2760	160	1.27	480	500	280	2.01
5	230	50	1570	120	0.98	890	0	525	0.00
6	230	50	1955	151	1.20	800	196	470	0.79
7	230	50	2520	188	1.46	665	438	395	1.76
8	230	50	2750	160	1.27	480	497	280	2.00
9	230	50	1275	64	0.57	725	0	425	0.00
10	230	50	1585	80	0.67	650	128	380	0.51
11	230	50	2065	99	0.83	540	291	320	1.17
12	230	50	2530	121	0.99	440	421	260	1.69
13	230	50	945	28	0.27	530	0	310	0.00
14	230	50	1170	33	0.31	470	67	275	0.27
15	230	50	1520	43	0.38	395	153	230	0.61
16	230	50	1845	50	0.44	320	223	190	0.90

U = Power supply · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · qv = Air flow · p_{is} = Pressure increase