

AC centrifugal fan

forward-curved, dual-intake
with housing (flange), Automotive

D4D133-DB36-19 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	D4D133-DB36-19		
Motor	M4D068-CF		
Phase		3~	3~
Nominal voltage	VAC	230	400
Frequency	Hz	50	50
Method of obtaining data		fa	fa
Valid for approval/standard		CE	CE
Speed (rpm)	min ⁻¹	1120	1120
Power consumption	W	68	68
Current draw	A	0.21	0.12
Min. back pressure	Pa	0	0
Min. back pressure	in. wg	0	0
Min. ambient temperature	°C	-25	-25
Max. ambient temperature	°C	100	100

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



AC centrifugal fan

forward-curved, dual-intake
with housing (flange), Automotive

Technical description


Weight	3.4 kg
Size	133 mm
Motor size	68
Rotor surface	Painted black
Impeller material	Sheet steel, galvanized
Housing material	Sheet steel, galvanized
Motor suspension	Motor mounted with brackets on one side
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP44
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H3
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on bottom
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	< 0.75 mA
Motor protection	Thermal overload protector (TOP) with basic insulation
With cable	Axial
Protection class	I (with customer connection of protective earth)
Conformity with standards	CE



AC centrifugal fan

forward-curved, dual-intake
with housing (flange), Automotive

Curves: Air performance 50 Hz

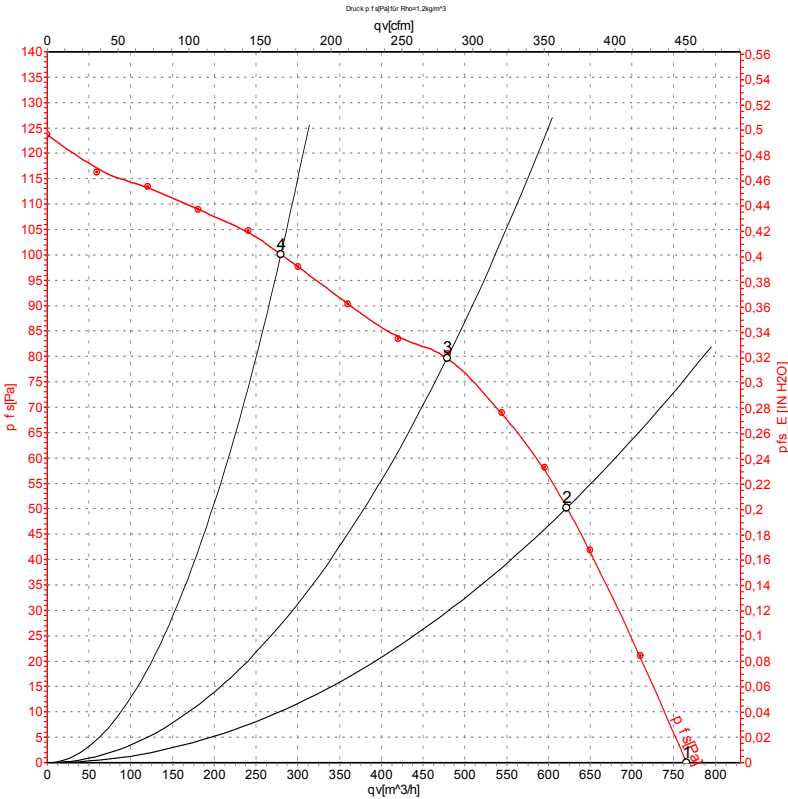

Measurement: LU-109294-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	q _v	P _{fs}	q _v	P _{fs}
		V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	in. wg
1	Y	400	50	1120	68	0.12	765	0	450	0.00
2	Y	400	50	1245	53	0.09	620	50	365	0.20
3	Y	400	50	1320	42	0.08	480	80	280	0.32
4	Y	400	50	1395	29	0.07	280	100	165	0.40

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · P_{fs} = Pressure increase

