

AC centrifugal fan

forward-curved, dual-intake

with housing (flange)

D4D160-DC38-09 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	D4D160-DC38-09		
Motor	M4D068-CF		
Phase		3~	3~
Nominal voltage	VAC	400	400
Wiring		Y	Y
Frequency	Hz	50	60
Method of obtaining data		ml	ml
Valid for approval/standard		CE	CE
Speed (rpm)	min ⁻¹	1280	1380
Power consumption	W	58	80
Current draw	A	0.11	0.13
Min. back pressure	Pa	120	140
Min. back pressure	in. wg	0.48	0.56
Min. ambient temperature	°C	-25	-25
Max. ambient temperature	°C	100	95

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · oe = Customer equipment
Subject to change



AC centrifugal fan

forward-curved, dual-intake
with housing (flange)

Technical description


Weight	3.9 kg
Size	160 mm
Motor size	68
Rotor surface	Painted black
Impeller material	Sheet steel, painted black
Housing material	Sheet steel, painted black
Support structure material	Sheet steel, galvanized and painted black
Motor suspension	Motor mounted on brackets for one-sided vibration damping
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP44; installation- and position-dependent
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	F5; H2
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	< 0.75 mA
Motor protection	Thermal overload protector (TOP) with basic insulation
With cable	Axial
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1; CE
Approval	UL 1004-1; CSA C22.2 No. 100



AC centrifugal fan

forward-curved, dual-intake
with housing (flange)

Product drawing

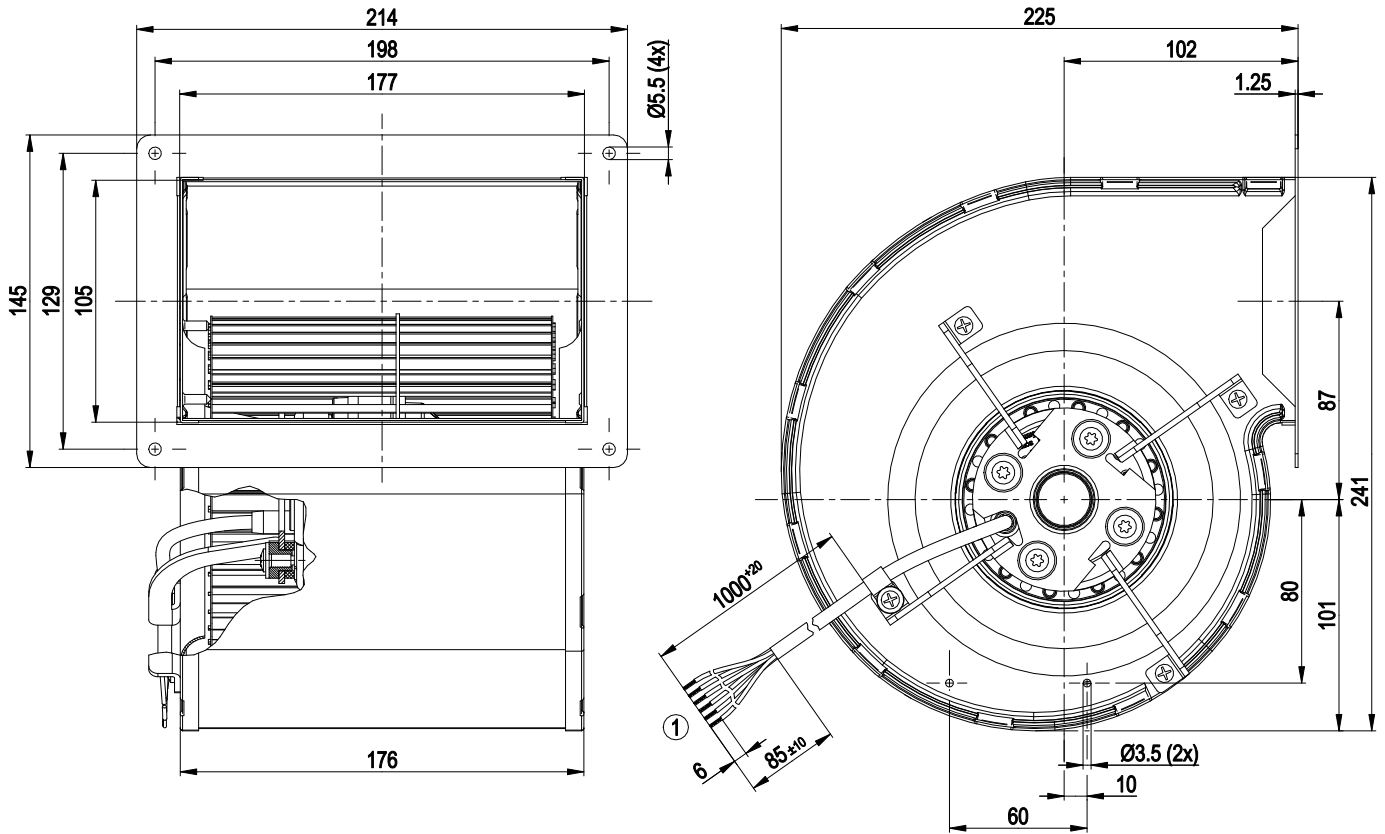


Cable silicone 6G 0.5 mm², 6x crimped splices

AC centrifugal fan

forward-curved, dual-intake
with housing (flange)

Connection diagram

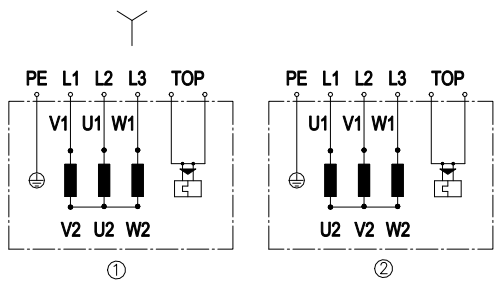

Change of rotation direction by reversing two phases


	Three-phase motor
Y	Star connection
1	Counterclockwise operation
L1	= V1 = black
L2	= U1 = black
L3	= W1 = black
2	Clockwise operation
L1	= U1 = black
L2	= V1 = black
L3	= W1 = black
PE	green/yellow
TOP	2x black



AC centrifugal fan

forward-curved, dual-intake
with housing (flange)

Curves: Air performance 50 Hz

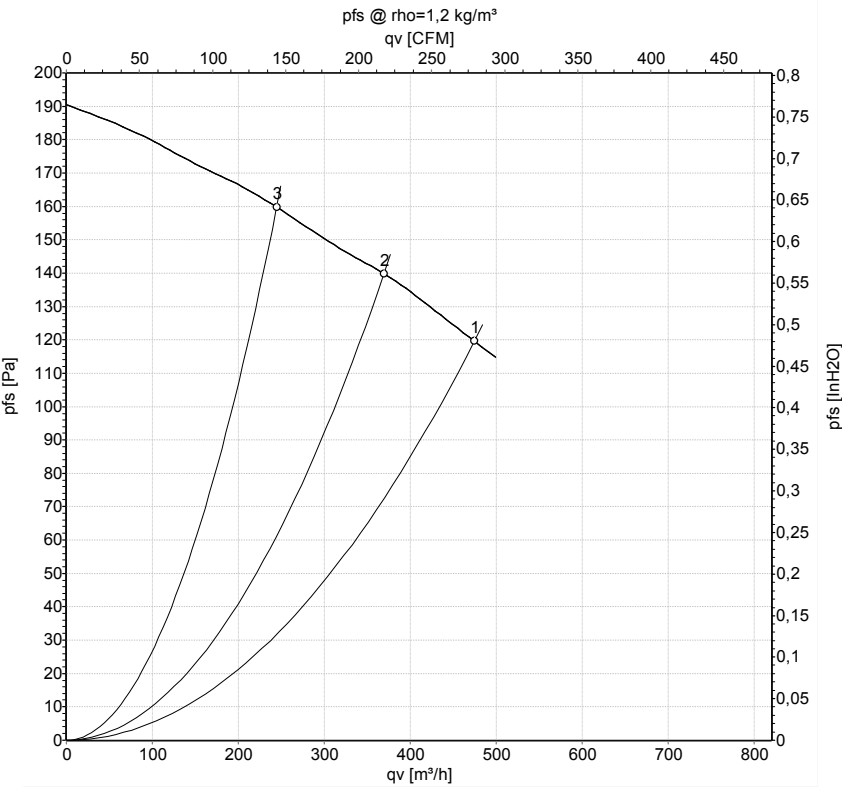

Measurement: LU-58205-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	in. wg
1	Y	400	50	1280	58	0.11	475	120	280	0.48
2	Y	400	50	1330	51	0.11	370	140	215	0.56
3	Y	400	50	1380	42	0.10	245	160	145	0.64


Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase



AC centrifugal fan

forward-curved, dual-intake
with housing (flange)

Curves: Air performance 60 Hz

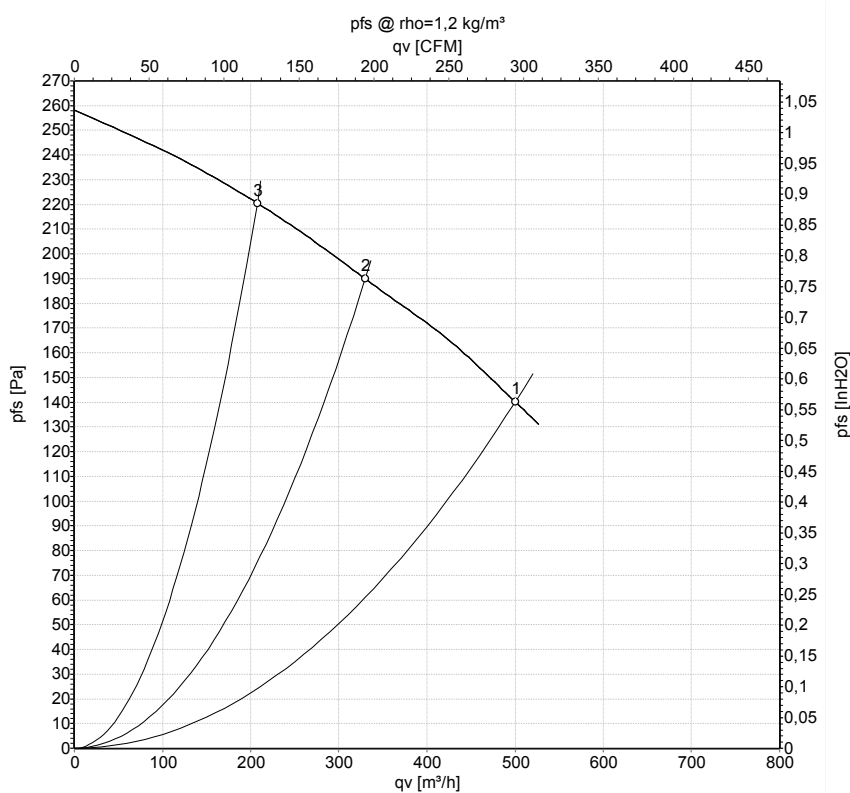

Measurement: LU-58204-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	m ³ /h	Pa	cfm	in. wg
1	Y	400	60	1380	80	0.13	500	140	295	0.56
2	Y	400	60	1520	61	0.11	330	190	195	0.76
3	Y	400	60	1590	50	0.10	205	220	120	0.88

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase

