

# AC centrifugal fan

forward curved, dual inlet

with housing (flange)

D4E200-BA05-53 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen  
County court Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen  
County court Stuttgart · HRB 590142

## Nominal data

Type	D4E200-BA05-53	
Motor	M4E068-LA	
Phase		1~
Nominal voltage	VAC	240
Frequency	Hz	50
Type of data definition		fa
Valid for approval / standard		CE
Speed (rpm)	min <sup>-1</sup>	1040
Power input	W	400
Current draw	A	1.68
Motor capacitor	µF	8
Capacitor voltage	VDB	400
Capacitor standard		S0 (CE)
Min. back pressure	Pa	0
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	65
Starting current	A	2.41

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit  
Subject to alterations

## Data according to ErP directive

	Actual	Request 2015
01 Overall efficiency $\eta_{es}$	%	33.5
02 Measurement category	A	
03 Efficiency category	Static	
04 Efficiency grade N	44	44
05 Variable speed drive	No	

Data definition with optimum efficiency.  
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.

09 Power input $P_e$	kW	0.22
09 Air flow $q_v$	m <sup>3</sup> /h	1205
09 Pressure increase $p_{fs}$	Pa	224
10 Speed (rpm) $n$	min <sup>-1</sup>	1315
11 Specific ratio*		1.00

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$

LU-161528



# AC centrifugal fan

forward curved, dual inlet  
with housing (flange)

## Technical features


Mass	10.8 kg
Size	200 mm
Material of impeller	Sheet steel, galvanised
Housing material	Sheet steel, galvanised
Motor suspension	Motor mounted anti-vibration on both sides
Direction of rotation	Counter-clockwise, seen on rotor
Type of protection	IP 54; Depending on installation and position
Insulation class	"F"
Humidity (F)/environmental protection class (H)	F3-1
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Any
Condensate discharge holes	None
Operation mode	S1
Motor bearing	Ball bearing
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	< 0.75 mA
Motor protection	Thermal overload protector (TOP) brought out, basic insulation
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60335-1; CE



# AC centrifugal fan


forward curved, dual inlet  
with housing (flange)

## Product drawing

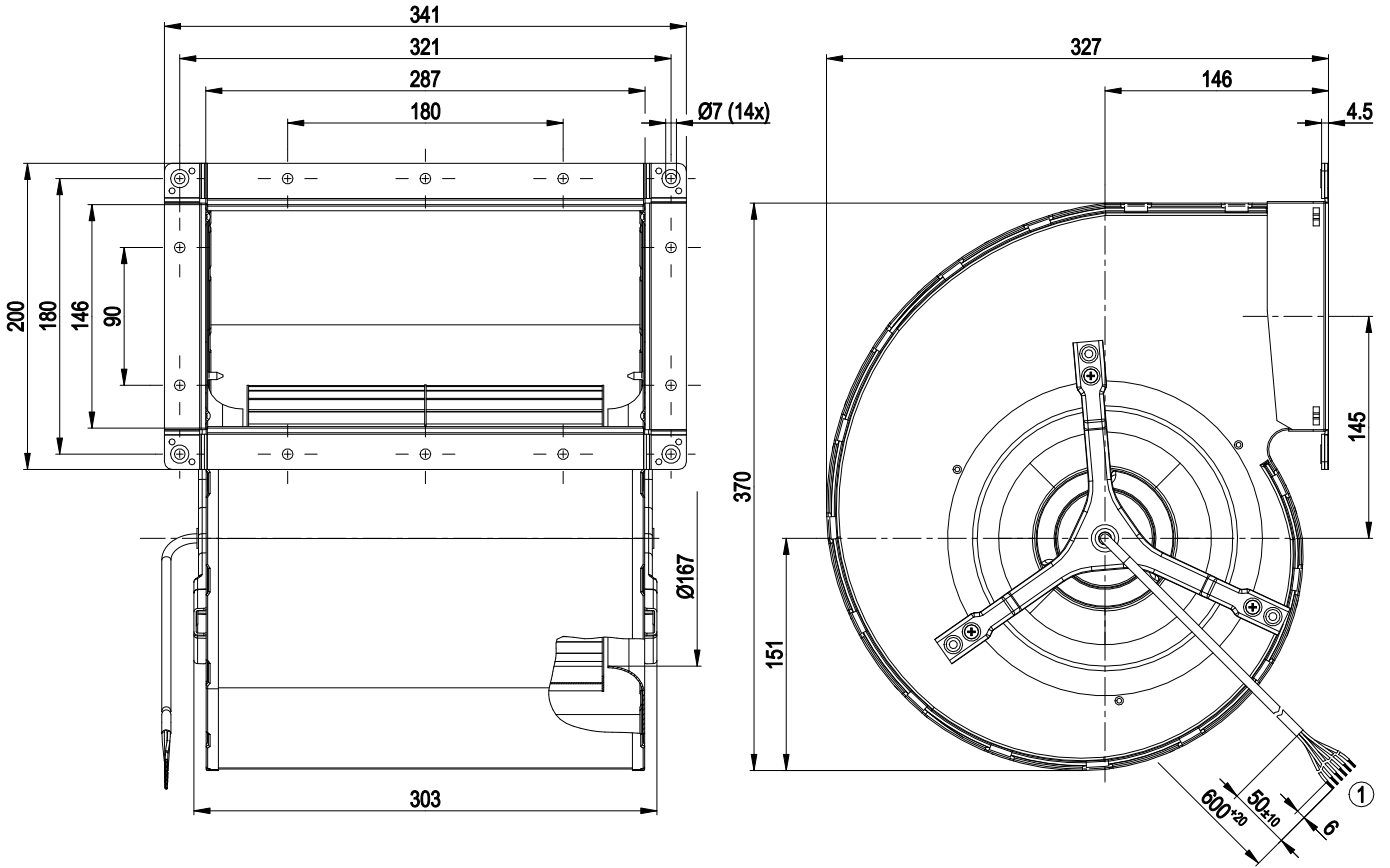

1 Connection line ETFE AWG20, 6x lead tips crimped

## Connection screen

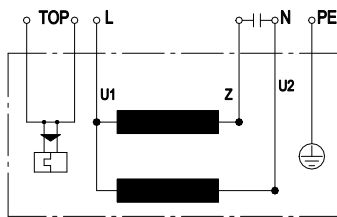


U1	Blue	Z	brown	U2	black
PE	green/yellow	TOP	2 x grey		



# AC centrifugal fan

forward curved, dual inlet  
with housing (flange)

## Charts: Air flow 50 Hz

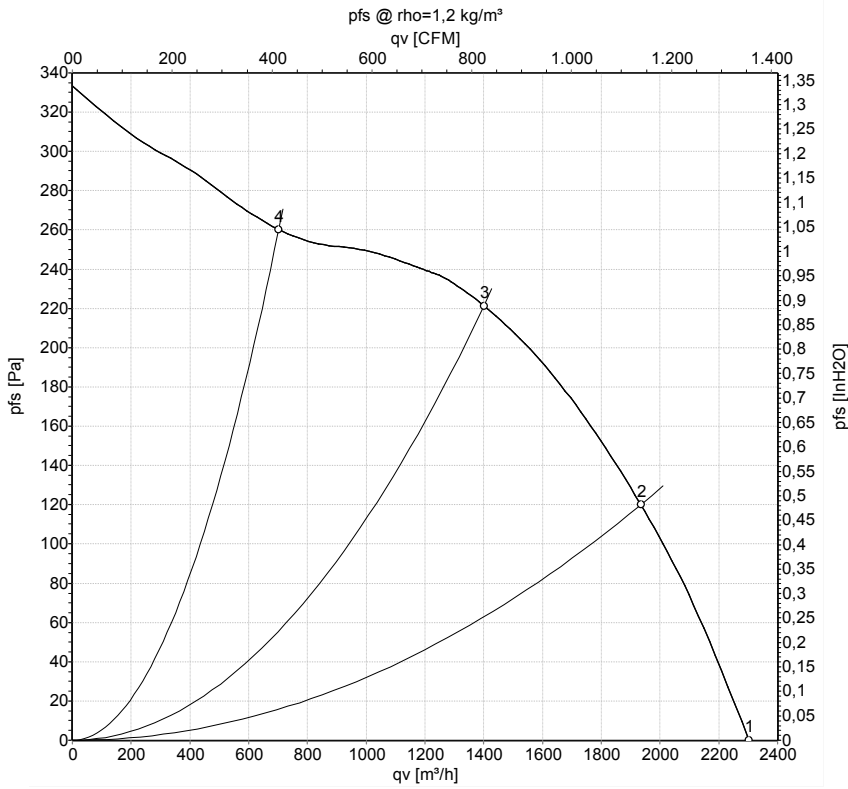

Measurement: LU-161784-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

	U	f	n	P <sub>e</sub>	I	q <sub>v</sub>	P <sub>fs</sub>	q <sub>v</sub>	P <sub>fs</sub>
	V	Hz	min <sup>-1</sup>	W	A	m <sup>3</sup> /h	Pa	cfm	inH <sub>2</sub> O
1	240	50	1040	400	1.68	2305	0	1355	0.00
2	240	50	1190	320	1.34	1935	120	1140	0.48
3	240	50	1305	254	1.07	1400	220	825	0.88
4	240	50	1385	191	0.82	700	260	415	1.04

U = Supply voltage · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power input · I = Current draw · q<sub>v</sub> = Air flow · P<sub>fs</sub> = Pressure increase

