

AC centrifugal fan

forward-curved, dual-intake

with housing (large flange)

D4E225-CC13-44 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	D4E225-CC13-44	
Motor	M4E074-LA	
Phase		1~
Nominal voltage	VAC	115
Frequency	Hz	60
Method of obtaining data		ml
Valid for approval/standard		CE
Speed (rpm)	min ⁻¹	1270
Power consumption	W	675
Current draw	A	5.77
Capacitor	μF	40
Capacitor voltage	VDB	220
Capacitor standard		S2 (CE)
Min. back pressure	Pa	300
Min. back pressure	inH ₂ O	1.2
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	30

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



AC centrifugal fan

forward-curved, dual-intake
with housing (large flange)

Technical description


Weight	13 kg
Fan size	225 mm
Rotor surface	Painted black
Impeller material	Sheet steel, galvanized
Housing material	Sheet steel, galvanized
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP22
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	F2-1
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	< 0.75 mA
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Axial
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1; CE
Approval	CSA C22.2 No. 100; UL 1004-1; CCC



AC centrifugal fan


forward-curved, dual-intake
with housing (large flange)

Product drawing

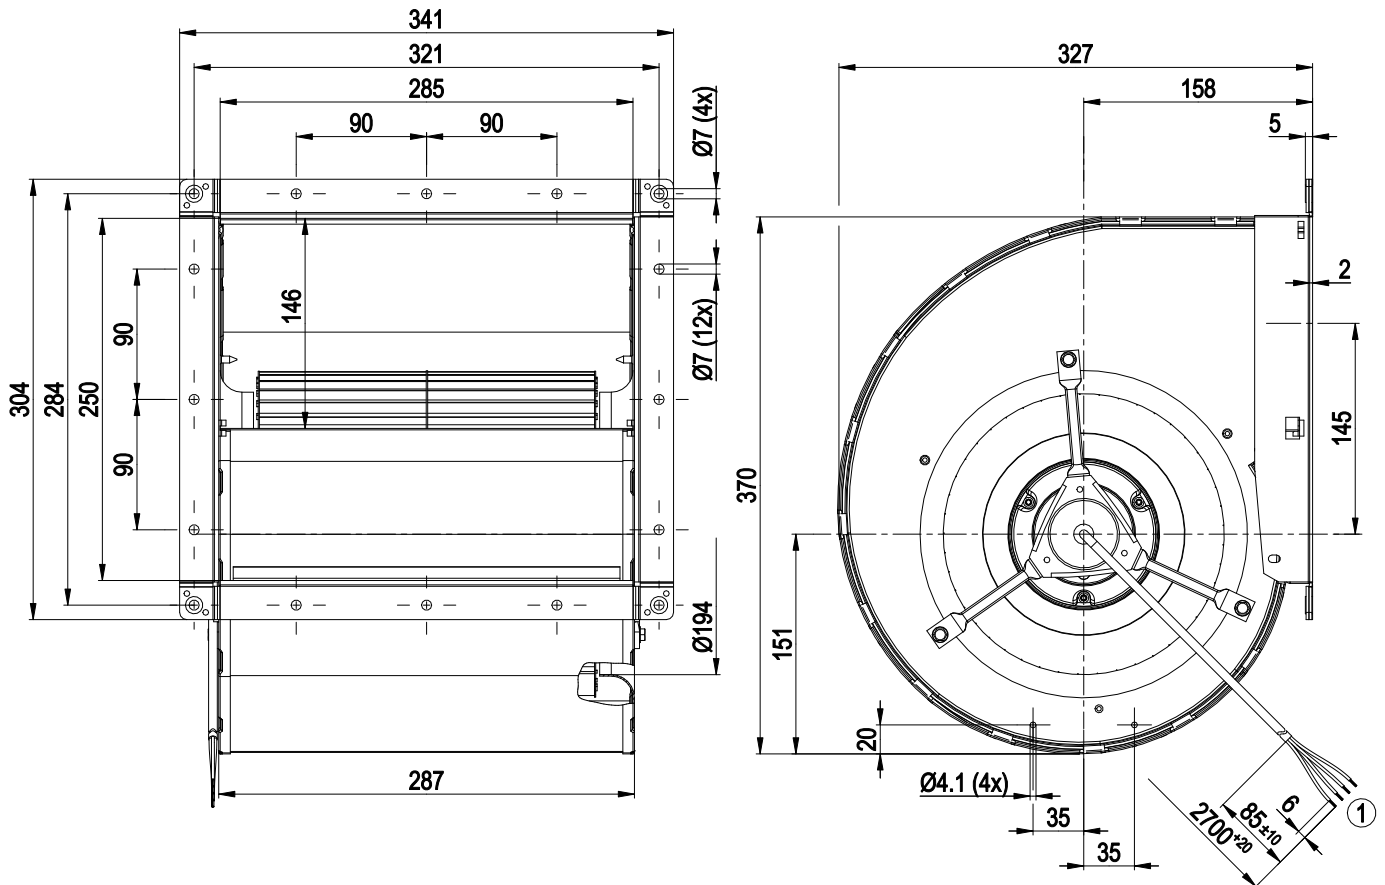

1	Cable PVC 4G AWG20, 4x crimped splices
---	--

Connection diagram

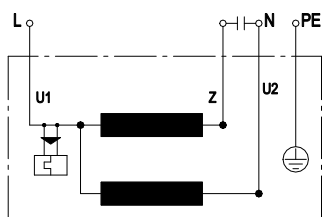


U1	blue	Z	brown	U2	black
PE	green/yellow				

AC centrifugal fan

forward-curved, dual-intake
with housing (large flange)

Curves: Air performance 60 Hz

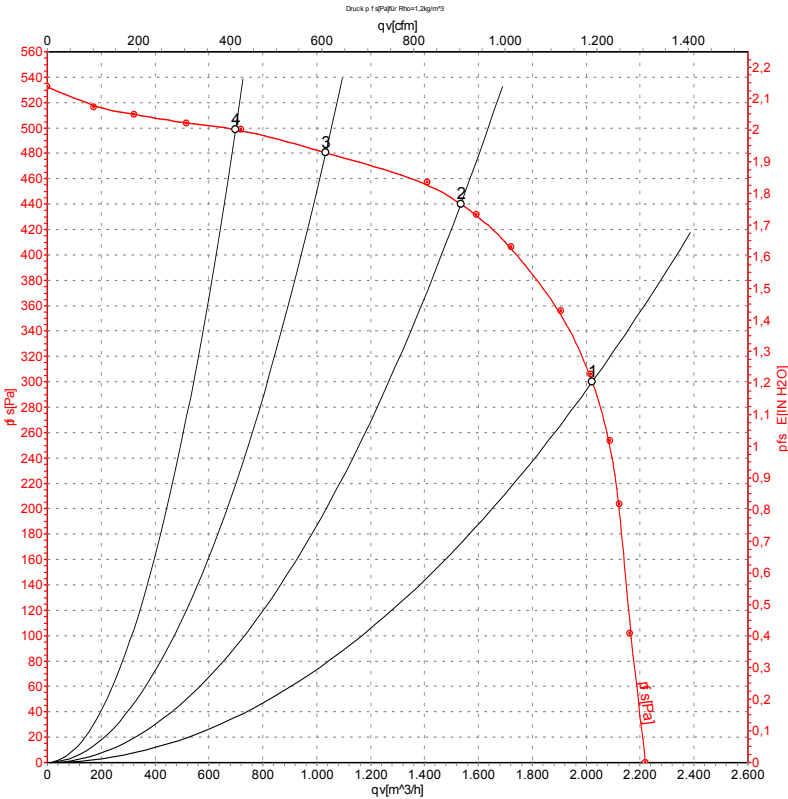

Measurement: LU-38009-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	q _v	P _{is}	q _v	P _{is}
	V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	inH ₂ O
1	115	60	1270	660	5.77	2020	300	1190	1.20
2	115	60	1520	529	4.58	1535	440	905	1.77
3	115	60	1620	444	3.87	1035	480	610	1.93
4	115	60	1660	393	3.48	700	500	410	2.01

U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · P_{is} = Pressure increase

