

**Product Data Sheet**

**9295414531**  
VKS0154XULCS  
DV6248 U

**ebmpapst**

The engineer's choice

DV6248U (9295414531) ebmpapst Datasheet  
sales@fansco.com  
www.fansco.com



DV6248 U

INDEX

**1 General ..... 3**

**2 Mechanics ..... 3**

2.1 General..... 3

2.2 Connections..... 3

**3 Operating Data ..... 4**

3.1 Electrical Operating Data ..... 4

3.2 Electrical Features ..... 5

3.3 Aerodynamics ..... 6

3.4 Sound Data..... 7

**4 Environment..... 7**

4.1 General..... 7

4.2 Climatic Requirements ..... 7

**5 Safety..... 9**

5.1 Electrical Safety ..... 9

5.2 Approval Tests ..... 9

**6 Reliability..... 9**

6.1 General..... 9

1 General

|                                     |                        |  |
|-------------------------------------|------------------------|--|
| Fan type                            | Mixed-flow fan         |  |
| Rotating direction looking at rotor | Counterclockwise       |  |
| Airflow direction                   | Air outlet over struts |  |
| Bearing system                      | Ball bearing           |  |
| Mounting position - shaft           | Any                    |  |


2 Mechanics

2.1 General

|   |   |  |
|---|---|--|
| Depth   | 51,0 mm   |  |
| Diameter  | 172,0 mm  |  |
| Mass  | 0,895 kg  |  |
| Housing material                                      | Metal   |  |
| Impeller material                                     | Plastic   |  |
| Max. torque when mounted across both mounting flanges | Wire outlet corner: 180 Ncm<br>Remaining corners: 180 Ncm               |  |
| Screw size  | ISO 4762 - M4 degreased, without an additional brace and without washer |  |

2.2 Connections

|                       |             |  |
|-----------------------|-------------|--|
| Electrical connection | Wires       |  |
| Lead wire length      | L = 365 mm  |  |
| Tolerance             | + - 10,0 mm |  |
| Tube length           | S = 15 mm   |  |
| Tolerance             | + - 3,0 mm  |  |

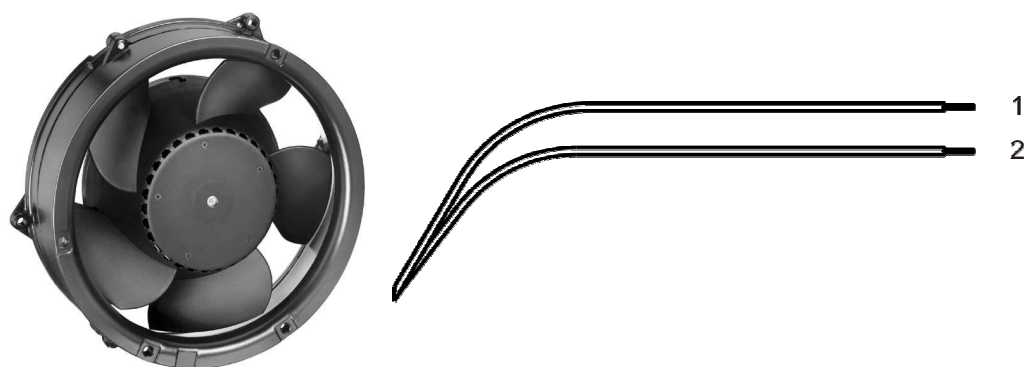

| Wire | Color | Operation | Wire size | Insulation diameter |
|------|-------|-----------|-----------|---------------------|
| 1    | red   | + UB      | AWG 22    | 1,7 mm              |
| 2    | blue  | - GND     | AWG 22    | 1,7 mm              |

### 3 Operating Data

#### 3.1 Electrical Operating Data

Measurement conditions: Normal air density = 1,2 kg/m<sup>3</sup>; Temperature 23°C +/- 3°C; Motor axis horizontal; warm-up time before measuring 5 minutes (unless otherwise specified). In the intake and outlet area should not be any solid obstruction within 0,5 m.

$\Delta p = 0$ : corresp. to free air flow (see chapter aerodynamics)

I: corresp. to arithm. mean current value

No inrush current means: Inrush current is mainly affected by length and kind of connecting line 39 uF

| Features                     | Condition      | Symbol | Values      |             |             |
|------------------------------|----------------|--------|-------------|-------------|-------------|
| Voltage range                |                | U      | 28 V        |             | 60,0 V      |
| Nominal voltage              |                | $U_N$  |             | 48,0 V      |             |
| Power consumption            | $\Delta p = 0$ | P      | 14 W        | 37 W        | 56 W        |
| Tolerance                    | 0010           |        | +/- 20 %    | +/- 15,0 %  | +/- 15,0 %  |
| Current consumption          | $\Delta p = 0$ | I      | 500 mA      | 770 mA      | 900 mA      |
| Tolerance                    | 0010           |        | +/- 20,0 %  | +/- 15,0 %  | +/- 15,0 %  |
| Speed                        | $\Delta p = 0$ | n      | 2.750 1/min | 4.300 1/min | 4.710 1/min |
| Tolerance                    | 0010           |        | +/- 10 %    | +/- 7,5 %   | +/- 7,5 %   |
| Starting current consumption |                |        |             | 3.500 mA    |             |

## 3.2 Electrical Features

|                                |                                     |  |
|--------------------------------|-------------------------------------|--|
| Electronic function            | None                                |  |
| Reversed polarity protection   | Rectifying diode                    |  |
| Max. residual current at $U_N$ | $I_F < 10 \text{ mA}$               |  |
| Locked rotor protection        | Auto restart                        |  |
| Locked rotor current at $U_N$  | $I_{\text{block}}$ approx. 2.800 mA |  |
| Clock signal at locked rotor   | $t_3 / t_4$ typical: 1,4 s / 5,3 s  |  |




3.3 Aerodynamics

Measurement conditions: Measured with a double chamber intake rig acc. to DIN EN ISO 5801. Normal air density = 1,2 kg/m<sup>3</sup>; Temperature 23°C +/- 3°C; In the intake and outlet area should not be any solid obstruction within 0,5 m. Motor shaft horizontal. The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions.

a.) Operation condition:

4.300 1/min at free air flow

|   |                         |  |
|---|-------------------------|--|
| Max. free-air flow ( $\Delta p = 0 / \dot{V} = \text{max.}$ )   | 530,0 m <sup>3</sup> /h |  |
| Max. static pressure ( $\Delta p = \text{max.} / \dot{V} = 0$ ) | 415 Pa                  |  |

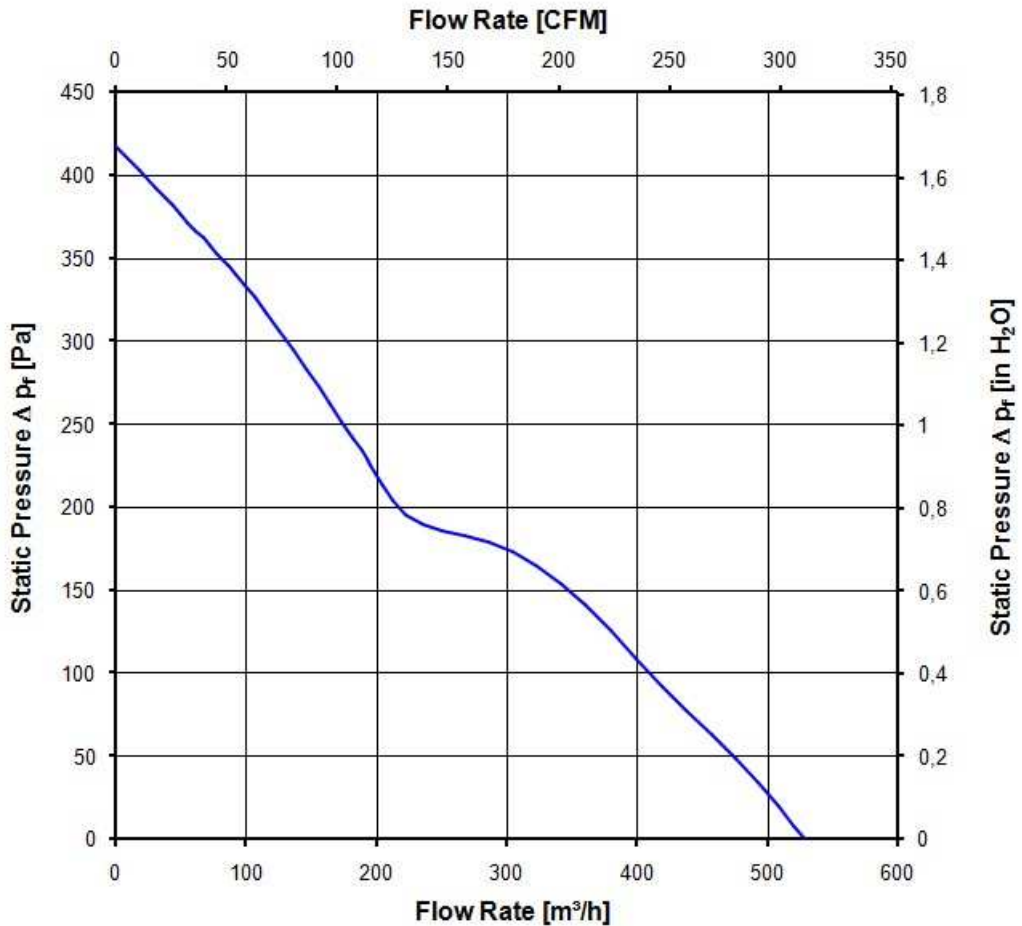

### 3.4 Sound Data

Measurement conditions: Sound pressure level: 1 meter distance between microphone and the air intake.  
Sound power level: Acc. to DIN 45635 part 38 (ISO 10302)  
Measured in a semianchoic chamber with a background noise level of  $L_p(A) < 5 \text{ dB(A)}$   
For further measurement conditions see chapter aerodynamics.

a.) Operation condition:

|   |                                  |  |
|---|----------------------------------|--|
| 4.300 1/min at free air flow                                    |                                  |  |
| Optimal operating point   | 370,0 m <sup>3</sup> /h @ 120 Pa |  |
| Sound power level at the optimal operating point                | 7,3 bel(A)                       |  |
| Sound pressure level at free air flow, measured in rubber bands | 65,0 dB(A)                       |  |

## 4 Environment

### 4.1 General

|  |        |  |
|--|--------|--|
| Min. permitted ambient temperature TU min. | -20 °C |  |
| Max. permitted ambient temperature TU max. | 75 °C  |  |
| Min. permitted storage temperature TL min. | -40 °C |  |
| Max. permitted storage temperature TL max. | 80 °C  |  |

### 4.2 Climatic Requirements

|                                |   |  |
|--------------------------------|---|--|
| IP-protection type (certified) | IP 68 (for fan only, not for connector if applicable) **)   |  |
| Humidity requirements          | humid temperature, cyclic; according to DIN EN 60068-2-38, 10 cycle and condensation water check; according to DIN EN ISO 6270-2, 14 days |  |
| Salt fog requirements          | None  |  |

Permitted application area:

The product is for the use in partial sheltered rooms or open, roofed areas. Direct exposure to water is allowed provided that this does not prevent the normal operation. Saline ambient conditions must be avoided.

Pollution degree 3 (according DIN EN 60664-1)

It occurs conductive pollution or dry non-conductive pollution which becomes conductive due to condensation.

\*\*) The specification of the IP protection refers to the conditions mentioned in certification of the fan. The above mentioned short description of the protection scope is not final. For detailed information of the respective protection scope and definitions, see certification as well as DIN EN 60529 (protection by housings) and ISO 20653 (for vehicles) with the letter K.

#### **Short description of the IP-protection type:**

Solid particle Protection: Dust tight.

Protection against deliberate contact: Protected against contact to hazardous parts with a wire.

Protection against water: The fan test according to IP68 (Based on IEC 60529), is conducted in non-operating mode. The fan is tested by a complete immersion in water for a period of 2h at a water-level of 1,2m. Electrical connections are not immersed since they are customer specific.

Please require severity levels and specification parameters from the responsible development departments.

## 5 Safety

### 5.1 Electrical Safety

|  |                  |  |
|--|------------------|--|
| Dielectric strength<br>DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700)<br>A.) Type test<br>Measuring conditions: After 48h of storage at 95% R.H. and 25°C.<br>No arcing or breakdown is allowed!<br>All connections together to ground. | 500 VAC / 1 Min. |  |
| B.) Routine test<br>Measuring conditions: At indoor climate.<br>No arcing or breakdown is allowed!<br>All connections together to ground.  | 850 VDC / 1 Sec. |  |
| Isolation resistance<br>Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min.   | RI > 10 MOhm     |  |
| Clearance / creepage distance  | 1,0 mm / 1,2 mm  |  |
| Protection class   | III              |  |

### 5.2 Approval Tests

|     |   |   |
|-----|---|---|
| CE  | EC Declaration of Conformity  | Yes   |
| EAC | Eurasian Conformity   | Yes   |
| UL  | Underwriters Laboratories   | Yes / UL audited by CSA according to UL507, Electric Fans                     |
| VDE | Association for Electrical, Electronic and Information Technologies | Yes / Approval acc. to EN 60950 (VDE 0805) - Information technology equipment |
| CSA | Canadian Standards Association                                      | Yes / C22.2 No. 113 Fans and Ventilators                                      |
| CCC | China Compulsory Certification                                      | Yes / GB 12350 Safety Requirements for small Power Motors                     |

## 6 Reliability

### 6.1 General

|                                   |          |  |
|-----------------------------------|----------|--|
| Life expectancy L10 at TU = 40 °C | 90.000 h |  |
| Life expectancy L10 at TU max.    | 40.000 h |  |

