

EC centrifugal fan

forward-curved, single-intake
with housing (flange)

G1G170-AB31-38 ebmpapst Datasheet
sales@fansco.com
www.fansco.com



Nominal data

Type	G1G170-AB31-38	
Motor	M1G074-CF	
Phase		1~
Nominal voltage	VAC	230
Frequency	Hz	50
Speed (rpm)	min ⁻¹	6530
Power consumption	W	410
Current draw	A	1.8
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to ErP Directive

		Actual	Req. 2015
01 Overall efficiency η_{es}	%	57.1	46.4
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		71.7	61
05 Variable speed drive		Yes	

Data obtained at optimum efficiency level.
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

09 Power consumption P_{ed}	kW	0.41
09 Air flow q_v	m³/h	380
09 Pressure increase p_{fs}	Pa	2001
10 Speed (rpm) n	min ⁻¹	6530
11 Specific ratio*		1.02

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-56469



EC centrifugal fan

forward-curved, single-intake
with housing (flange)

Technical description


Weight	4.6 kg
Fan size	170 mm
Impeller material	Sheet aluminum
Housing material	Die-cast aluminum
Motor suspension	Motor mounted on support plate for one-sided vibration damping
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP20; installation- and position-dependent
Insulation class	"B"
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Cooling hole/opening	On rotor side
Mode	S1
Motor bearing	Ball bearing made of stainless steel
Technical features	- Tach output - Motor current limitation - Emergency operation - PFC, active - PWM control input - Control interface with SELV potential safely disconnected from the mains - Thermal overload protection for motor
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	With plug
Motor protection	Thermal overload protector (TOP) internally connected
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1
Approval	CSA C22.2 No. 113; UL 507; VDE



EC centrifugal fan

forward-curved, single-intake
with housing (flange)

Product drawing

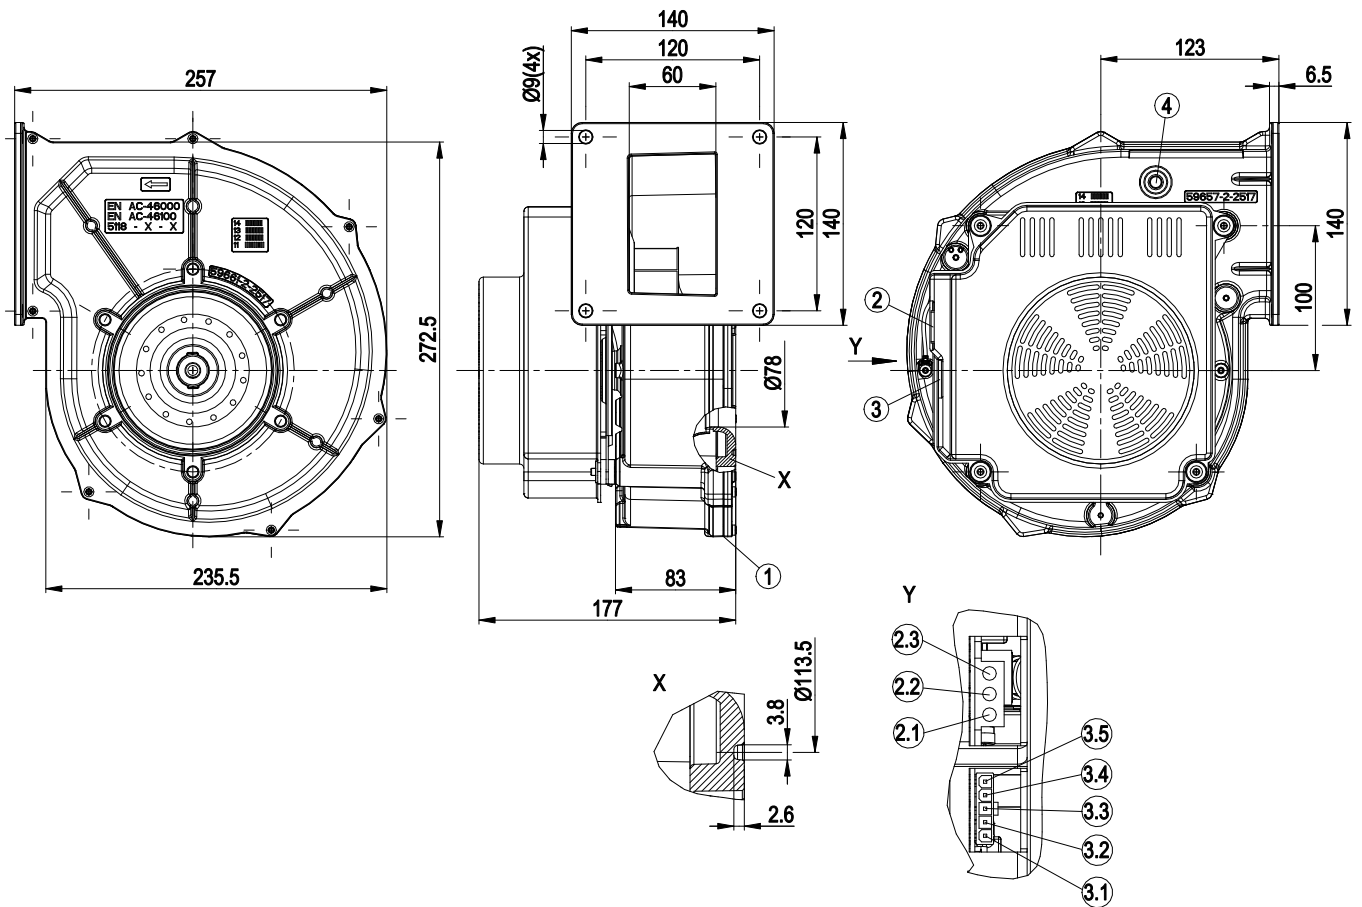


1	Housing side parts sealed with NBR round cord (pentane-resistant)
2	3-pole header, mating connector (not included in scope of delivery): Tyco no. 350 766-1; socket: Tyco no. 926 884-1
2.1	L
2.2	N
2.3	PE
3	5-pole header; mating connector (not included in scope of delivery): Molex no. 39-01-4050; socket: Molex no. 39-00-0059
3.1	UB
3.2	DUE
3.3	not used (NB)
3.4	PWM input
3.5	GND (-)
4	Pressure tap possible

EC centrifugal fan

forward-curved, single-intake
with housing (flange)

Connection diagram

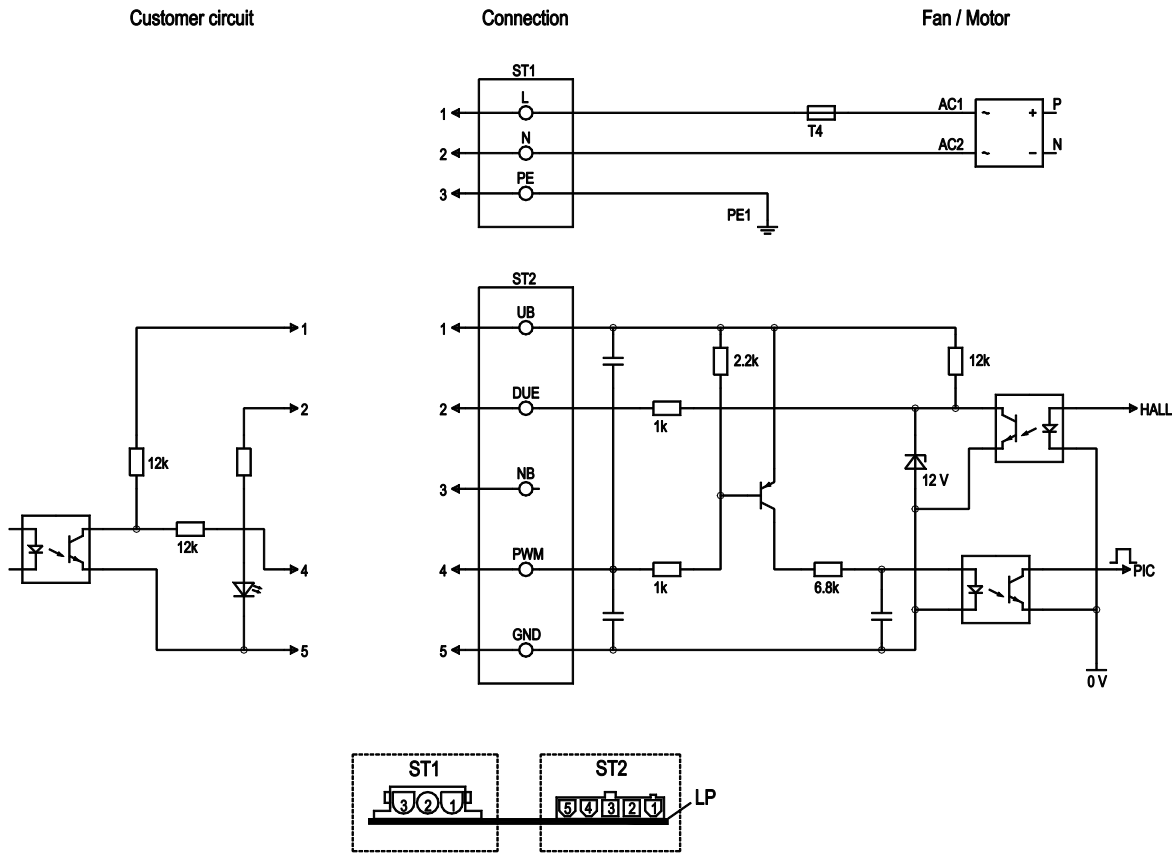


No.	Conn.	Designation	Function/assignment
ST1	1, 2, 3	L, N, PE	Power supply 230 VAC, 50-60 Hz, neutral conductor, protective earth
ST2	1	UB	external voltage 24-45 VDC
ST2	2	Tach	DUE connection, monitoring output, 3 pulses per revolution, I _{source} 1mA
ST2	3	N.C.	not used
ST2	4	PWM	PWM - 2-6 kHz control input, PWM on n = 100%, PWM low n = 0%
ST2	5	GND	GND connection for control interface



EC centrifugal fan

forward-curved, single-intake
with housing (flange)

Curves: Air performance 50 Hz

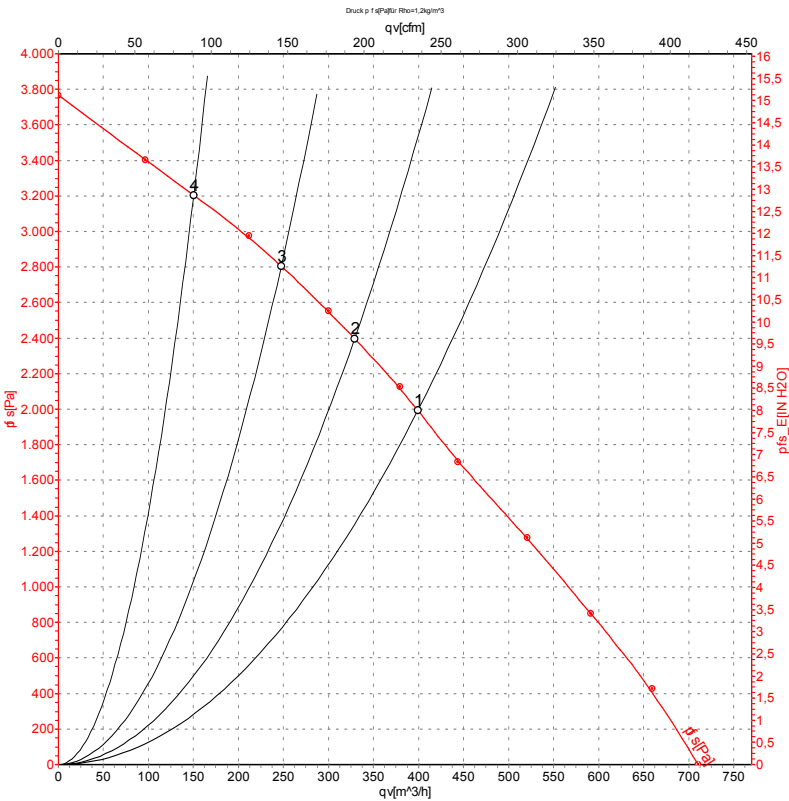

Measurement: LU-56469-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _{ed}	I	qv	p _{fs}	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa	CFM	inH2O
1	230	50	6530	410	1.80	380	2000	225	8.03
2	230	50	6665	400	1.75	330	2400	195	9.64
3	230	50	6915	370	1.62	250	2800	145	11.24
4	230	50	7250	326	1.44	150	3200	90	12.85

U = Power supply · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · qv = Air flow · p_{fs} = Pressure increase

