

G2G085-AB02-05

EC centrifugal fan

forward-curved, single-intake
with housing (flange)



G2G085-AB02-05 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	G2G085-AB02-05	
Motor	M2G045-BF	
Nominal voltage	VDC	24
Nominal voltage range	VDC	18 .. 30
Method of obtaining data		fa
Speed (rpm)	min ⁻¹	2300
Power consumption	W	12
Min. back pressure	Pa	0
Min. back pressure	inH ₂ O	0
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	65

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



EC centrifugal fan

forward-curved, single-intake
with housing (flange)

Technical description


Weight	0.84 kg
Fan size	85 mm
Rotor surface	Thick-film passivated
Impeller material	Sheet steel, galvanized
Housing material	Die-cast aluminum
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP22
Insulation class	"B"
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Motor protection	Reverse polarity and locked-rotor protection
With cable	Axial
Conformity with standards	EN 60950-1
Approval	E1



EC centrifugal fan


forward-curved, single-intake
with housing (flange)

Product drawing

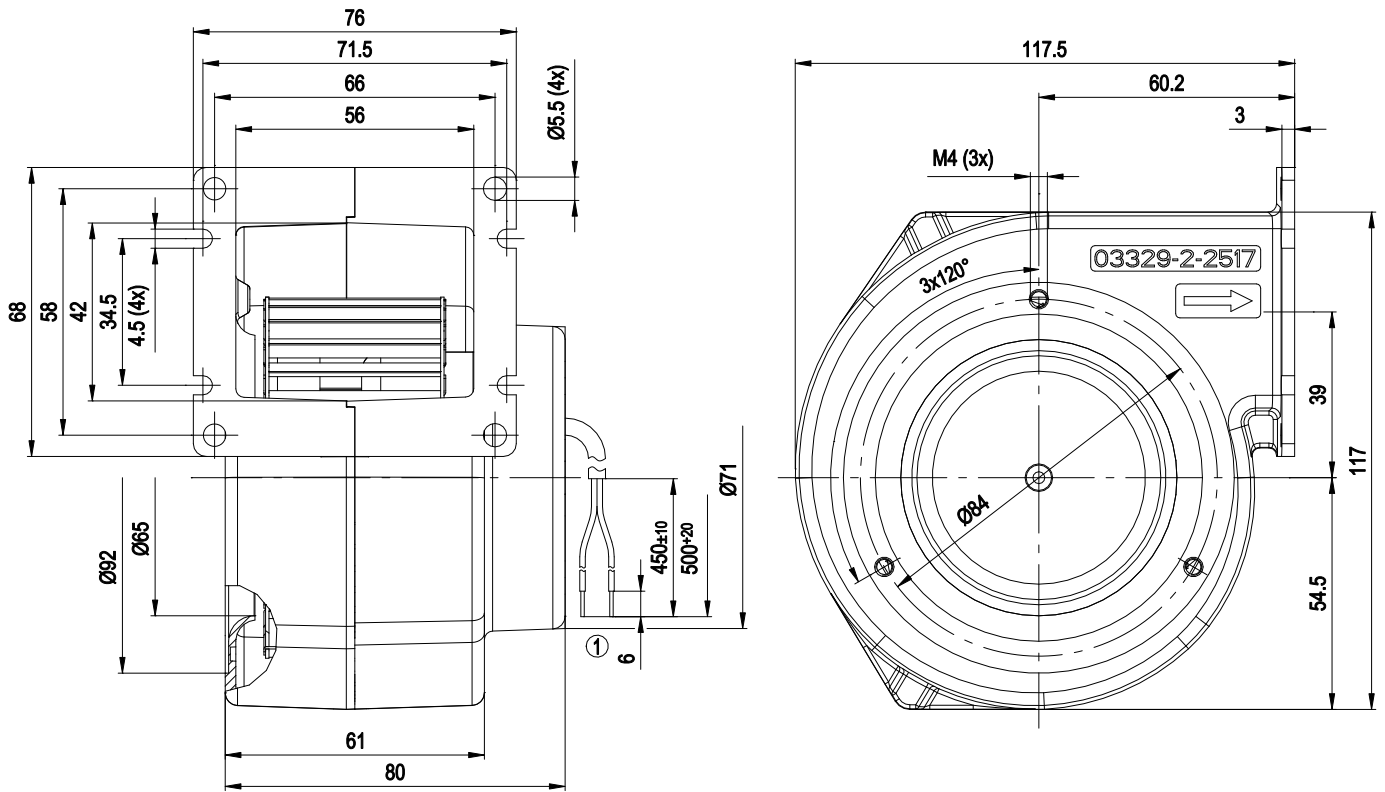


1 Cable PVC 2x FLRY 0.5-B, 2x crimped splices

Connection diagram

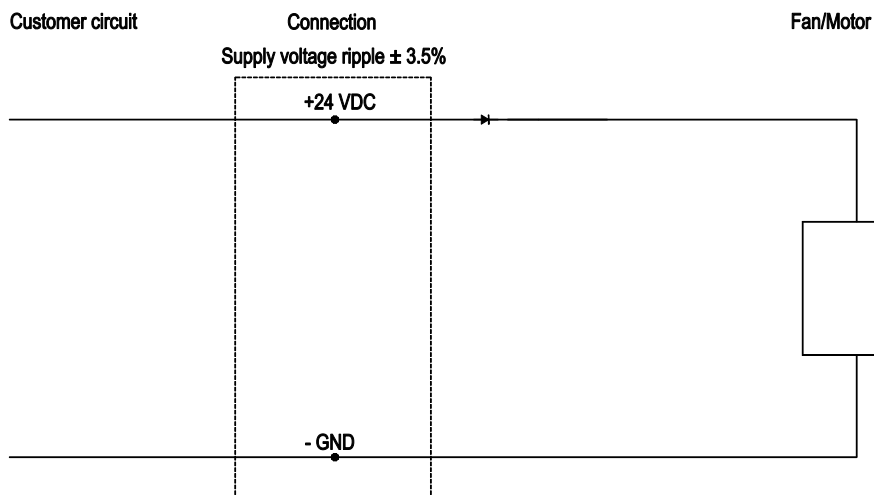

Curves: Air performance

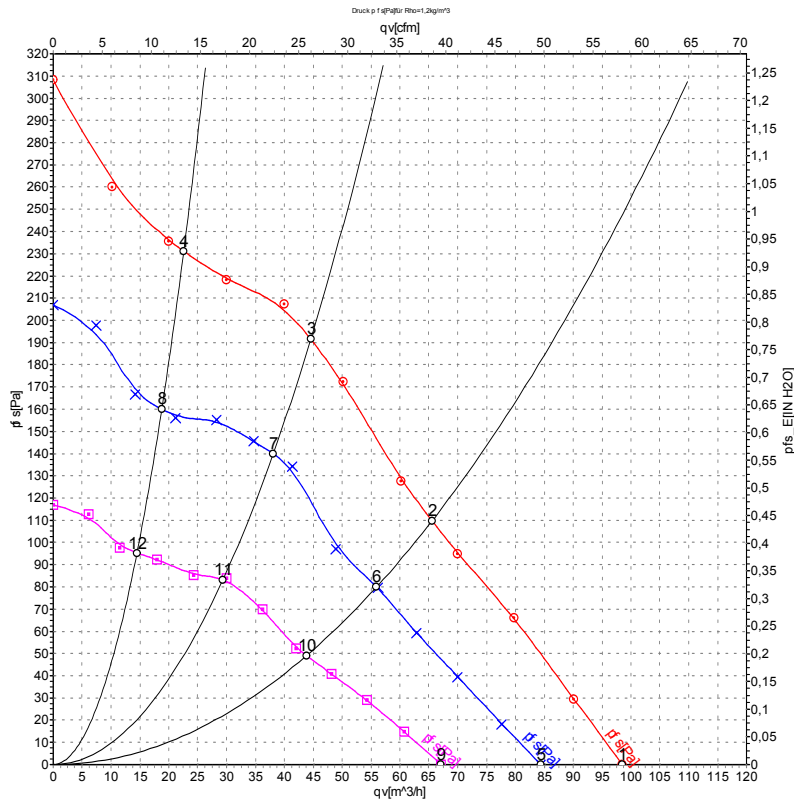

Measurement: LU-126372-1
 Measurement: LU-126371-1
 Measurement: LU-126374-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	n	P _{ed}	I	qv	p _{fs}	qv	p _{fs}
	V	min ⁻¹	W	A	m ³ /h	Pa	CFM	inH ₂ O
1	30	2910	19	0.69	100	0	60	0.00
2	30	3355	15	0.53	65	110	40	0.44
3	30	3655	12	0.43	45	192	25	0.77
4	30	3985	10.0	0.35	25	231	15	0.93
5	24	2520	12	0.52	85	0	50	0.00
6	24	2875	9.0	0.39	55	80	35	0.32
7	24	3105	7.5	0.32	40	140	20	0.56
8	24	3320	6.3	0.27	20	160	10	0.64
9	18	2040	6.0	0.35	65	0	40	0.00
10	18	2280	4.7	0.27	45	49	25	0.20
11	18	2460	3.8	0.22	30	84	15	0.34
12	18	2580	3.2	0.20	15	95	10	0.38

U = Power supply · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · qv = Air flow · p_{fs} = Pressure increase