

G2S150-AB56-42

AC centrifugal fan

backward-curved
with housing (without flange)

G2S150-AB56-42 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	G2S150-AB56-42	
Motor	M2S052-CA	
Phase		1~
Nominal voltage	VAC	230
Frequency	Hz	60
Method of obtaining data		fa
Valid for approval/standard		CE
Speed (rpm)	min ⁻¹	1800
Power consumption	W	57
Current draw	A	0.32
Min. back pressure	Pa	0
Min. back pressure	inH ₂ O	0
Max. ambient temperature	°C	45

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



G2S150-AB56-42

AC centrifugal fan

backward-curved
with housing (without flange)

Technical description


Weight	1.2 kg
Fan size	150 mm
Rotor surface	Partly cast in aluminum
Impeller material	Sheet steel, rust- and acid-resistant
Housing material	Die-cast aluminum
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP20
Insulation class	"F"
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	< 0.75 mA
Motor protection	Thermal overload protector (TOP) internally connected
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1; CE
Approval	CSA C22.2 No. 100; UL 1004-1



AC centrifugal fan


backward-curved
with housing (without flange)

Product drawing

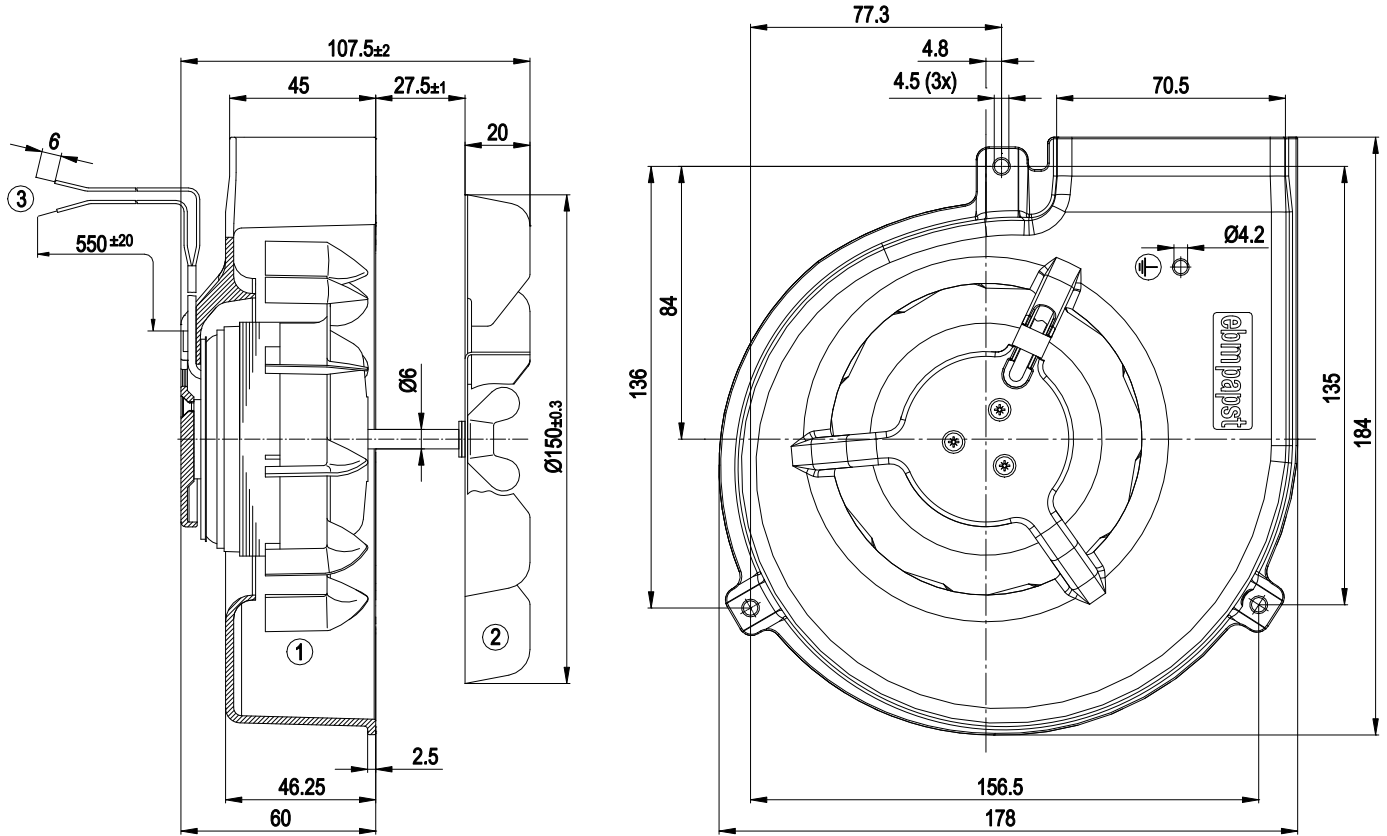

1	Centrifugal fan impeller (sheet steel, galvanized)
2	Centrifugal fan impeller (sheet steel, rust- and acid-resistant)
3	Cable FEP AWG20, 6 mm stripped


Connection diagram



L	= black
N	= black
TOP	= thermal overload protector



Curves: Air performance 60 Hz

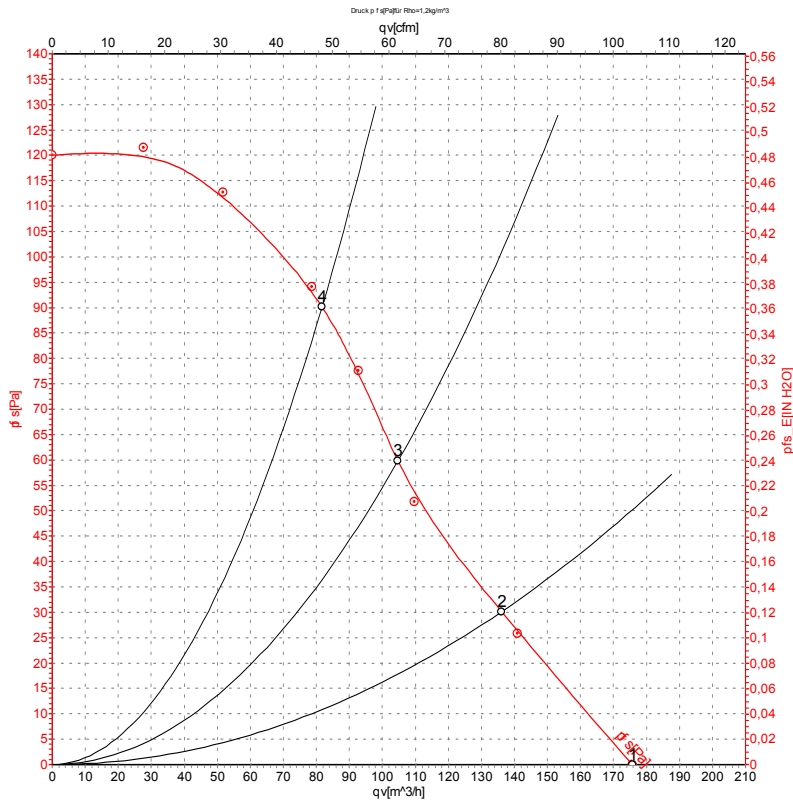

Measurement: LU-48195-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	qv	p _{fs}	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	m ³ /h	Pa	CFM	inH ₂ O
1	230	60	1800	57	0.32	175	0	105	0.00
2	230	60	1780	57	0.32	135	30	80	0.12
3	230	60	1815	56	0.31	105	60	60	0.24
4	230	60	1950	55	0.31	80	90	50	0.36

U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · qv = Air flow · p_{fs} = Pressure increase

