

G3G108-BB01-03

EC centrifugal fan

forward-curved, single-intake
with housing (flange)

G3G108-BB01-03 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	G3G108-BB01-03	
Motor	M3G055-BD	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		fa
Speed (rpm)	min ⁻¹	2850
Power consumption	W	55
Current draw	A	0.48
Min. back pressure	Pa	0
Min. back pressure	in. wg	0
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



EC centrifugal fan

forward-curved, single-intake
with housing (flange)

Technical description


Weight	1.9 kg
Fan size	108 mm
Rotor surface	Thick-film passivated
Impeller material	Sheet steel, galvanized
Housing material	Die-cast aluminum
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing
Technical features	<ul style="list-style-type: none"> - Output 10 VDC, max. 10 mA - Tach output - Power limiter - Motor current limitation - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Overvoltage detection - Thermal overload protection for electronics/motor - Line undervoltage detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-3 (household environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Electronic motor protection
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1; CE



EC centrifugal fan

forward-curved, single-intake
with housing (flange)

Product drawing

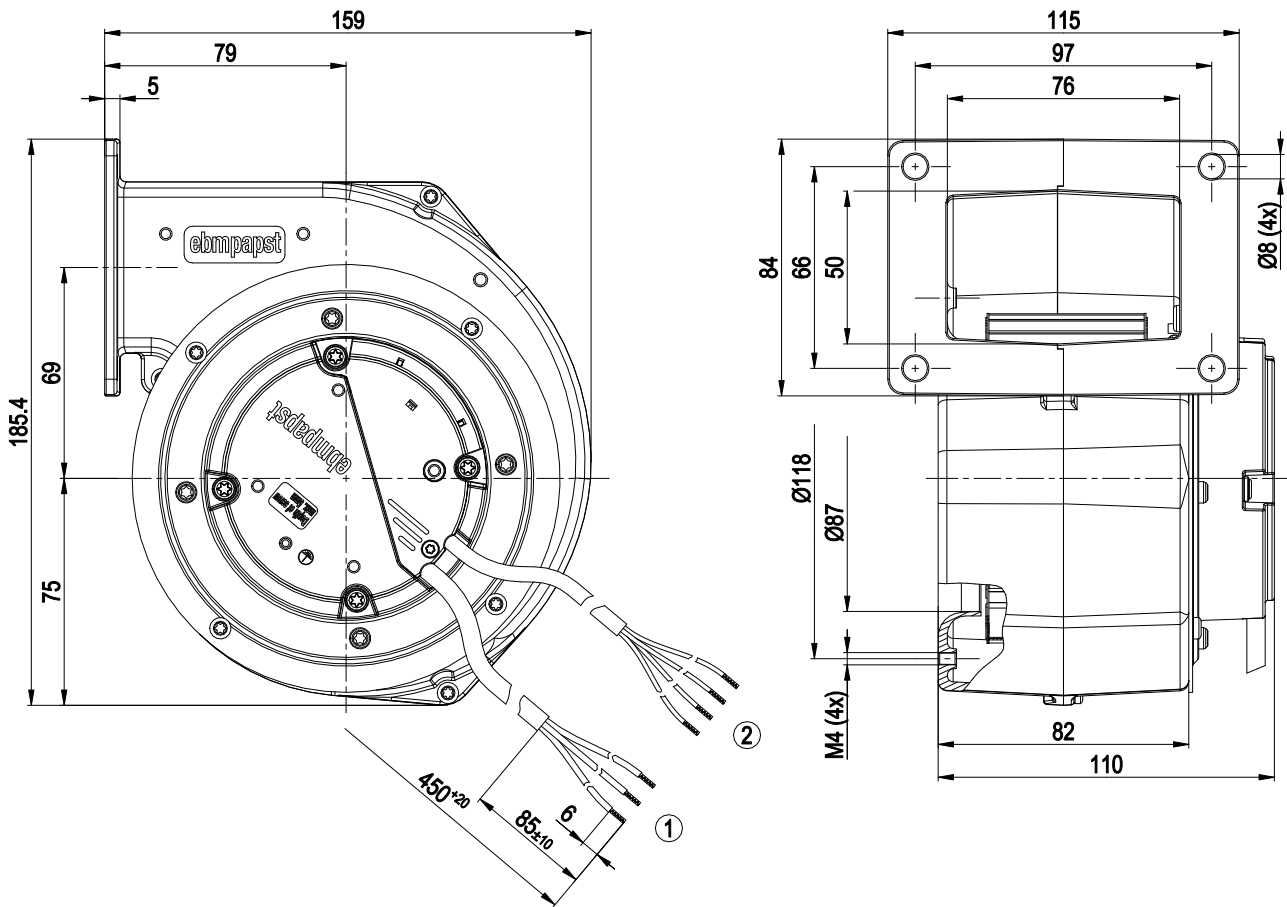

- | | |
|---|--|
| 1 | Cable PVC 3G 0.5 mm ² , 3x crimped splices |
| 2 | Cable PVC 4x 0.25 mm ² , 4x crimped splices |




EC centrifugal fan

forward-curved, single-intake

with housing (flange)

Connection diagram

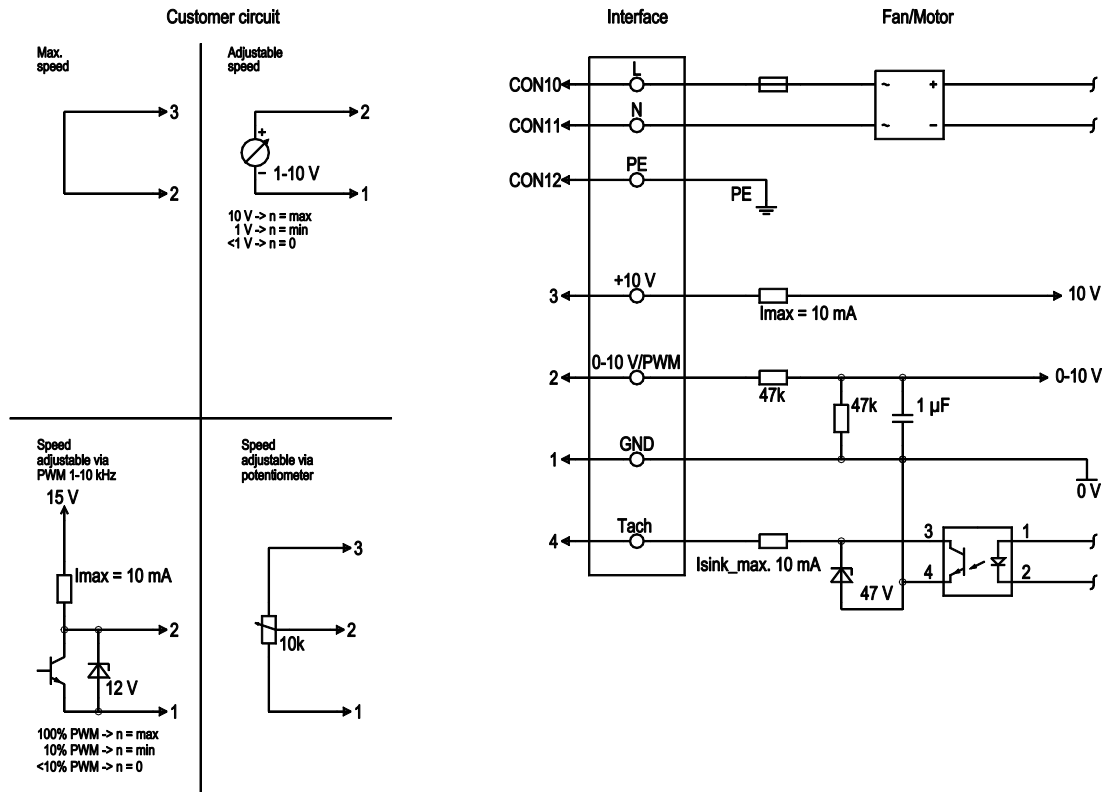


No.	Conn.	Designation	Color	Function/assignment
	CON10	L	brown	Supply connection, power supply, phase, see nameplate for voltage range
	CON11	N	blue	Supply connection, power supply, neutral conductor, see nameplate for voltage range
	CON12	PE	green/yellow	Ground connection
	2	0- 10V PWM	yellow	0-10 V / PWM control input, R _i =100 kΩ, SELV
	4	Tach	white	Tach output, open collector, 1 pulse per revolution, I _{sink max} = 10 mA, SELV
	3	+10 V	red	Fixed voltage output 10 VDC +/-3 %, I _{max} . 10 mA, short-circuit-proof, power supply for ext. devices (e.g. pot), SELV
	1	GND	blue	Reference ground for control interface, SELV



EC centrifugal fan

forward-curved, single-intake
with housing (flange)

Curves: Air performance 50 Hz

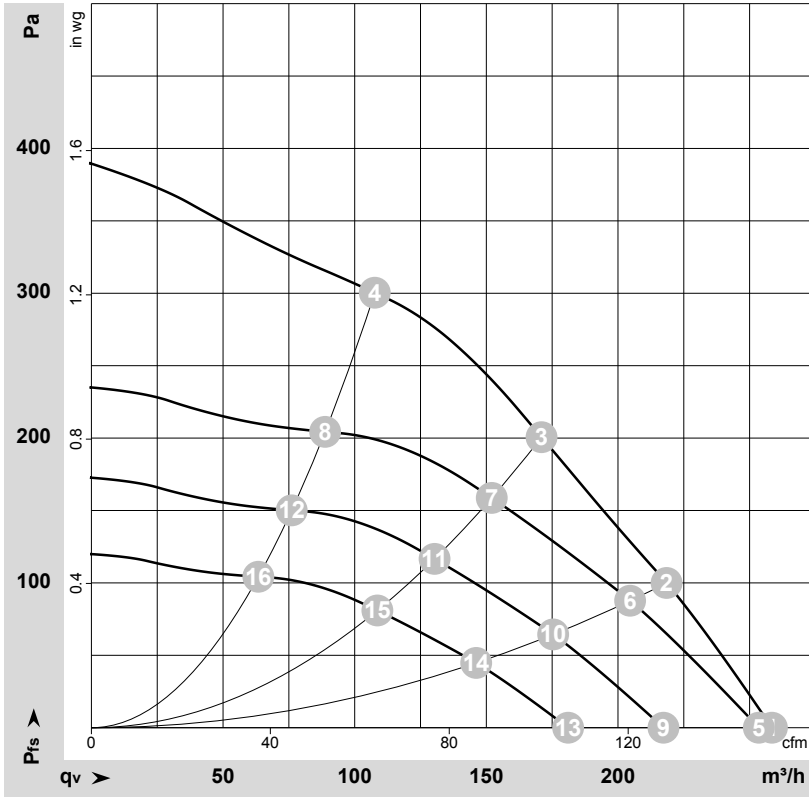

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-177609-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	q _v	P _{fs}	q _v	P _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m ³ /h	Pa	cfm	in. wg
1	230	50	2850	55	0.48	65	71	260	0	150	0.00
2	230	50	2990	48	0.43	63	69	220	100	130	0.40
3	230	50	3145	39	0.36	62	68	170	200	100	0.80
4	230	50	3395	30	0.28	61	68	110	300	65	1.20
5	230	50	2800	51	0.45	64	70	255	0	150	0.00
6	230	50	2800	39	0.35	62	68	205	88	120	0.35
7	230	50	2800	28	0.25	59	65	150	159	90	0.64
8	230	50	2800	17	0.16	56	63	90	204	50	0.82
9	230	50	2400	32	0.29	60	67	215	0	130	0.00
10	230	50	2400	25	0.22	58	64	175	65	105	0.26
11	230	50	2400	17	0.16	55	61	130	117	75	0.47
12	230	50	2400	11	0.10	52	59	75	150	45	0.60
13	230	50	2000	19	0.17	56	62	180	0	105	0.00
14	230	50	2000	14	0.13	53	59	145	45	85	0.18
15	230	50	2000	10.0	0.09	50	57	110	81	65	0.33
16	230	50	2000	6.0	0.06	47	54	65	104	35	0.42

U = Power supply · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
q_v = Air flow · p_{fs} = Pressure increase

