

EC centrifugal fan

forward-curved, single-intake
with housing (flange)

G3G146-HK07-24 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	G3G146-HK07-24	
Motor	M3G055-DF	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		fa
Speed (rpm)	min ⁻¹	2255
Power consumption	W	163
Current draw	A	1.3
Min. back pressure	Pa	0
Min. back pressure	in. wg	0
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (EN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	45.2	32.3	09 Power consumption P_{ed}	kW	0.13
02 Measurement category		A		09 Air flow q_v	m³/h	350
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	564
04 Efficiency grade N		56.9	44	10 Speed (rpm) n	min ⁻¹	3050
05 Variable speed drive		Yes		11 Specific ratio*		1.01

Data obtained at optimum efficiency level.
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

* Specific ratio = $1 + p_s / 100\,000\text{ Pa}$ LU-139323



EC centrifugal fan

forward-curved, single-intake
with housing (flange)

Technical description


Weight	2.8 kg
Size	146 mm
Motor size	55
Rotor surface	Thick-film passivated
Impeller material	Sheet steel, galvanized
Housing material	Sheet steel, galvanized
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Hybrid bearing
Technical features	- Output 10 VDC, max. 10 mA - Fault output (open collector) - Power limiter - Motor current limitation - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Overvoltage detection - Thermal overload protection for electronics/motor - Line undervoltage detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC interference emission	According to EN 61000-6-4 (industrial environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Connector with cable
Motor protection	Electronic motor protection
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1; CE



EC centrifugal fan

forward-curved, single-intake
with housing (flange)

Product drawing

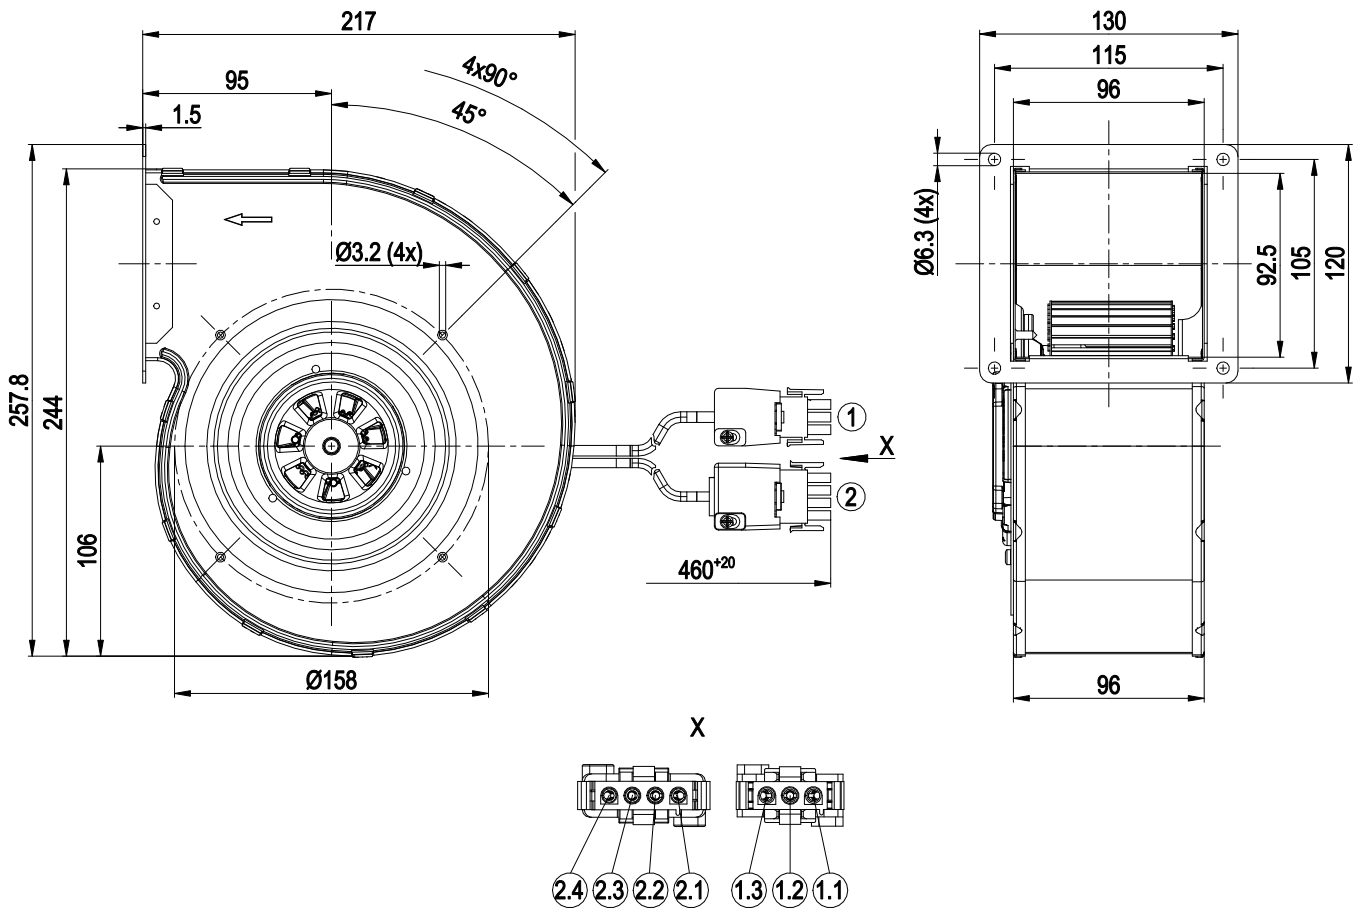


1	Cable halogen-free, 3G 0.5 mm ²
	3-pole connector housing TE 2178473-3, 3x plug pin TE 926885-1, strain relief TE 641945-1
1.1	L (brown)
1.2	PE (green/yellow)
1.3	N (blue)
2	Cable halogen-free, 4x 0.25 mm ²
	4-pole connector housing TE 350779-5, 4x plug pin TE 926885-1, strain relief TE 641776-1
2.1	+10 V (red)
2.2	Fan good / fan bad (white)
2.3	0-10 V/PWM (yellow)
2.4	GND (blue)

EC centrifugal fan

forward-curved, single-intake
with housing (flange)

Connection diagram

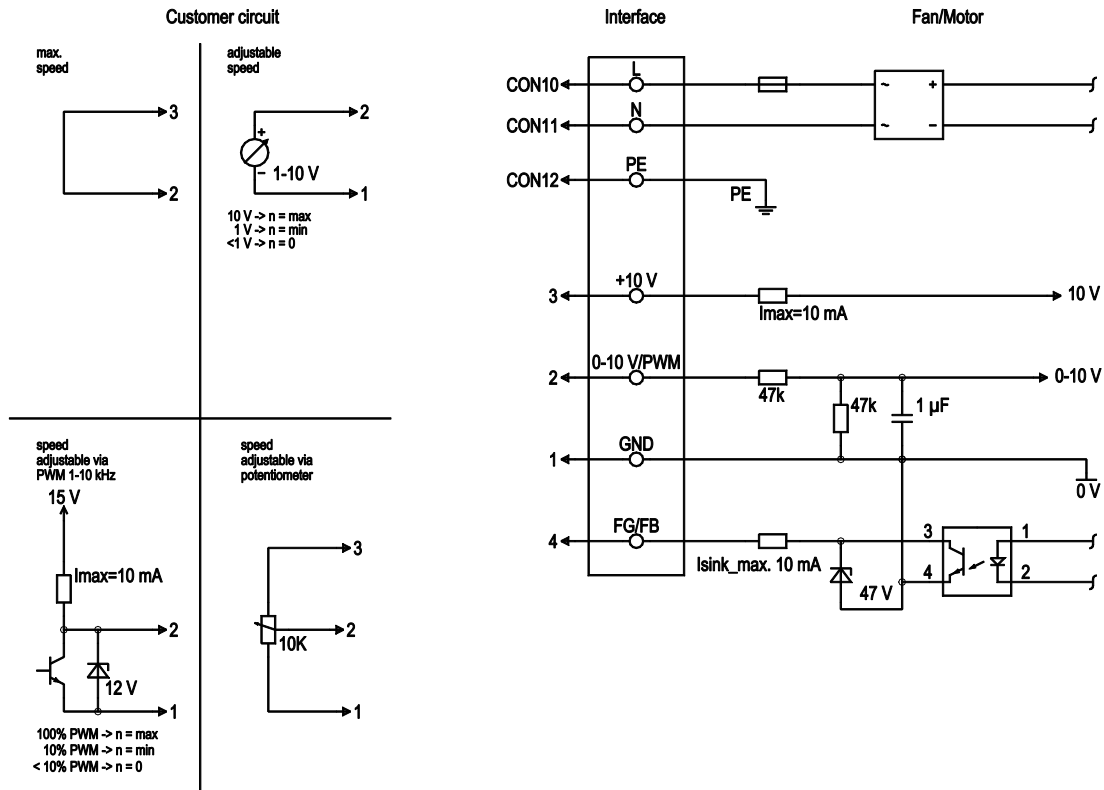


No.	Conn.	Designation	Color	Function/assignment
	CON10	L	brown	Supply connection, power supply, phase, see nameplate for voltage range
	CON11	N	blue	Supply connection, power supply, neutral conductor, see nameplate for voltage range
	CON12	PE	green/yellow	Ground connection
2	0- 10V PWM		yellow	0-10 V / PWM control input, Ri=100 kΩ, SELV
3	+10 V		red	Fixed voltage output 10 VDC +/-3%, I _{max} . 10 mA, short-circuit-proof, power supply for ext. devices (e.g. potentiometers), SELV
1	GND		blue	Reference ground for control interface, SELV
4	FG/FB		white	Fan good / fan bad: open collector, fan good = low, electrically isolated, I _{sink} max = 10 mA, SELV

EC centrifugal fan

forward-curved, single-intake

with housing (flange)

Curves: Air performance 50 Hz

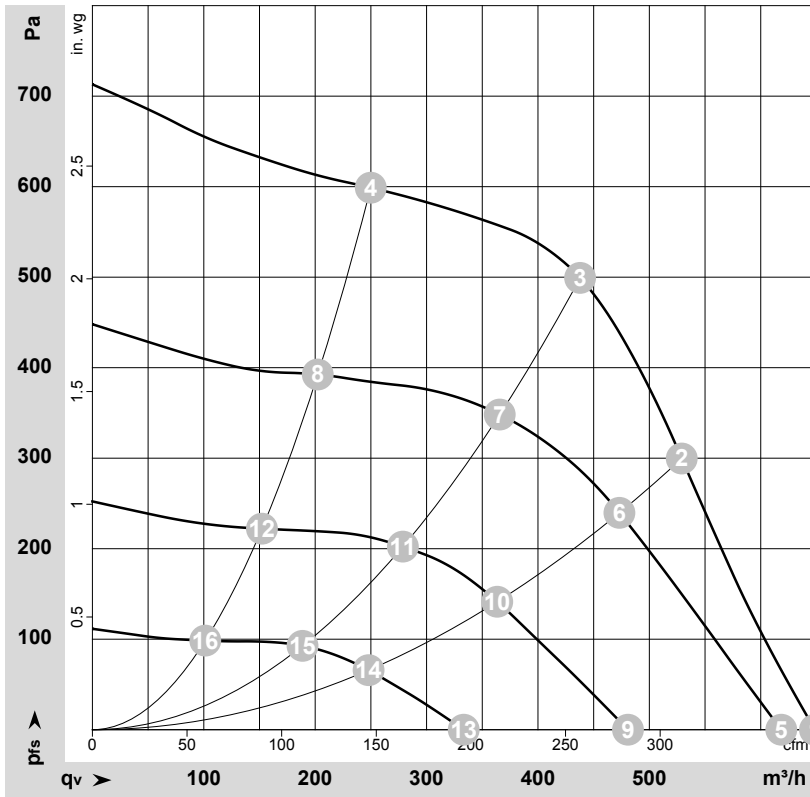

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-139323-1
 Measurement: LU-139324-1
 Measurement: LU-139325-1
 Measurement: LU-139326-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m³/h	Pa	cfm	in. wg
1	1~	230	50	2255	163	1.30	70	77	650	0	380	0.00
2	1~	230	50	2630	163	1.30	68	75	530	300	310	1.20
3	1~	230	50	2930	163	1.30	67	74	440	500	260	2.01
4	1~	230	50	3155	115	0.97	68	75	250	600	145	2.41
5	1~	230	50	2220	146	1.23			620	0	365	0.00
6	1~	230	50	2355	118	0.98			475	240	280	0.96
7	1~	230	50	2460	96	0.82			365	348	215	1.40
8	1~	230	50	2590	65	0.56			200	393	120	1.58
9	1~	230	50	1740	71	0.61			480	0	285	0.00
10	1~	230	50	1820	56	0.48			365	142	215	0.57
11	1~	230	50	1885	46	0.40			280	203	165	0.81
12	1~	230	50	1965	31	0.28			150	222	90	0.89
13	1~	230	50	1215	27	0.24			335	0	195	0.00
14	1~	230	50	1260	21	0.19			250	66	145	0.26
15	1~	230	50	1290	17	0.16			190	93	110	0.37
16	1~	230	50	1325	13	0.13			100	98	60	0.39

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
 q_v = Air flow · p_{fs} = Pressure increase

