

EC centrifugal fan

forward-curved, single-intake
with housing (without flange)



G3G180-AA05-H1 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	G3G180-AA05-H1	
Motor	M3G084-DF	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 277
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	2360
Power consumption	W	500
Current draw	A	2.2
Min. back pressure	Pa	300
Min. back pressure	inH2O	1.2
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	50

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to ErP Directive

		Actual	Req. 2015
01 Overall efficiency η_{es}	%	50	34.5
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		59.5	44
05 Variable speed drive		Yes	

Data obtained at optimum efficiency level.
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

09 Power consumption P_{ed}	kW	0.32
09 Air flow q_v	m³/h	755
09 Pressure increase p_{fs}	Pa	686
10 Speed (rpm) n	min ⁻¹	2645
11 Specific ratio*		1.01

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-155530



EC centrifugal fan

forward-curved, single-intake
with housing (without flange)

Technical description


Weight	6.84 kg
Fan size	180 mm
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum
Impeller material	Sheet steel, galvanized
Housing material	Sheet steel, galvanized
Number of blades	38
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP55
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	F3-1
Max. permitted ambient temp. for motor (transport/storage)	80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Any
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 10 mA - Operation and alarm display - Alarm relay - Integrated PID controller - Power limiter - Motor current limitation - PFC, active - RS-485 MODBUS-RTU - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-3 (household environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 61800-5-1; EN 60335-1; CE
Approval	UL 1004-7 + 60730; EAC; C22.2 No.77 + CAN/CSA-E60730-1



EC centrifugal fan

forward-curved, single-intake
with housing (without flange)

Product drawing

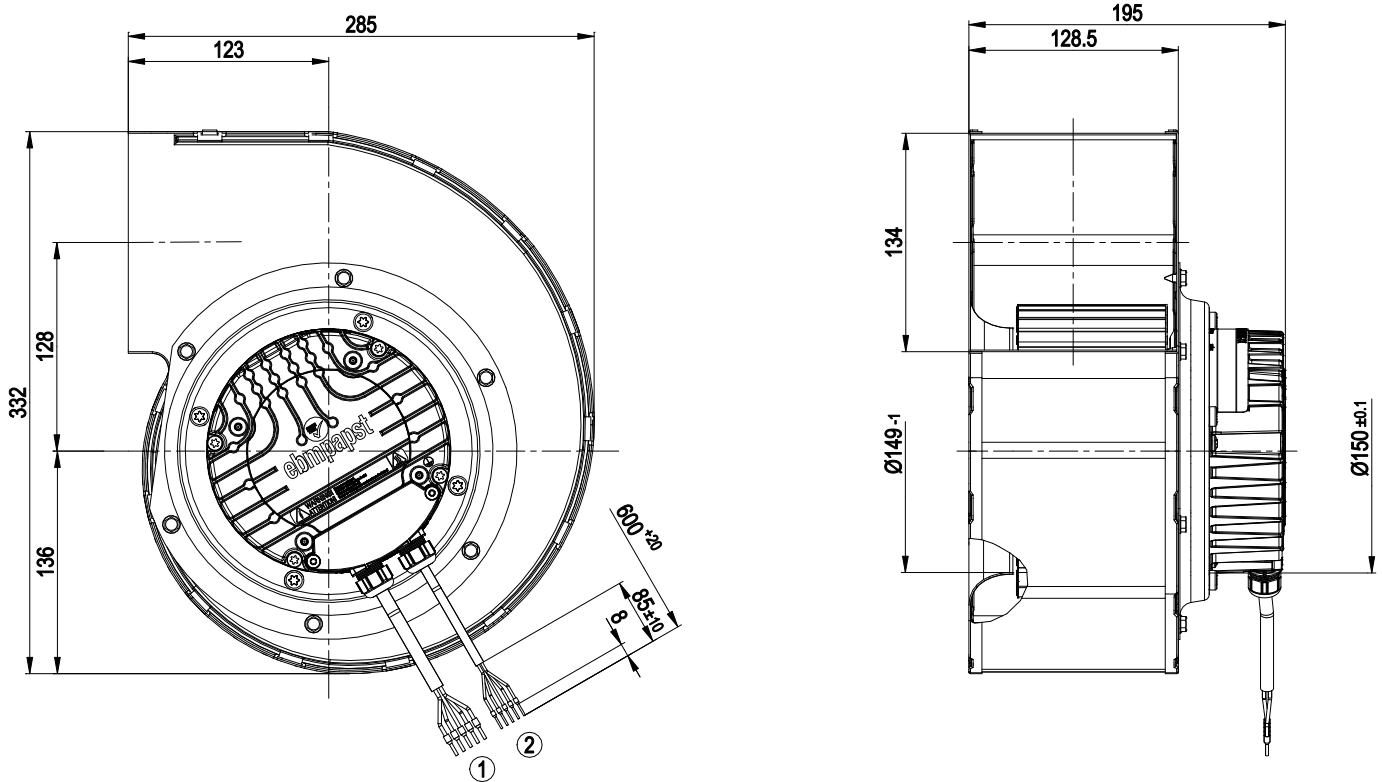


- | | |
|---|--------------------------------------|
| 1 | Cable PVC AWG22, 5x crimped ferrules |
| 2 | Cable PVC AWG18, 5x crimped ferrules |

EC centrifugal fan

forward-curved, single-intake
with housing (without flange)

Connection diagram

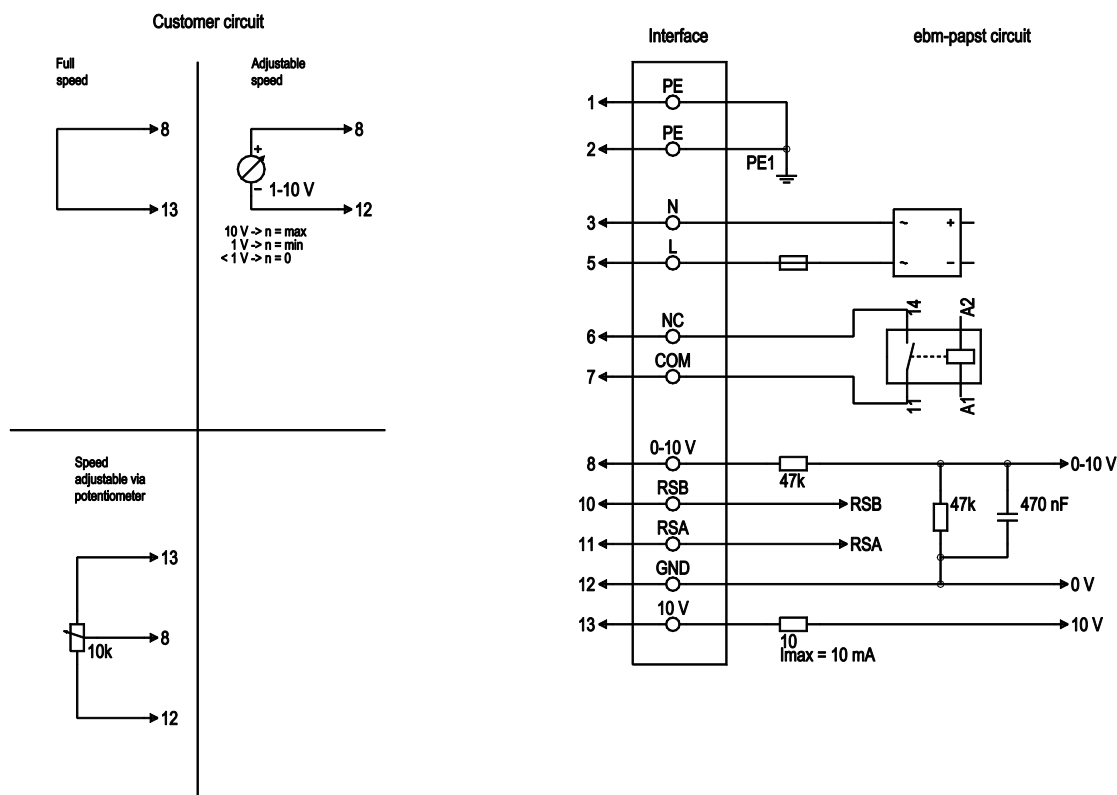


No.	Conn.	Designation	Color	Function/assignment
1	1, 2	PE	green/yellow	Protective earth
1	3	N	blue	Power supply, neutral conductor, 50/60 Hz
1	5	L	black	Power supply, phase, 50/60 Hz
1	6	NC	white 1	Status relay, floating status contact; break for failure, contact rating 250 VAC / 2A (AC1) / min. 10 mA, basic insulation on supply side and reinforced insulation on control interface side
1	7	COM	white 2	Status relay, floating status contact; common connection, contact rating 250 VAC / 2A (AC1) / min. 10 mA, basic insulation on supply side and reinforced insulation on control interface side
2	8	0-10V	yellow	Analog input (set value); 0-10 V; R _i = 100 kΩ; adjustable curve
2	10	RSB	brown	RS485 interface for MODBUS, RSB
2	11	RSA	white	RS485 interface for MODBUS, RSA
2	12	GND	blue	Reference ground for control interface, SELV
2	13	+10V	red	Fixed voltage output 10 VDC, +10 V ±3%; max. 10 mA; short-circuit-proof; power supply for external devices (e.g. pot)

EC centrifugal fan

forward-curved, single-intake
with housing (without flange)

Curves: Air performance 50 Hz

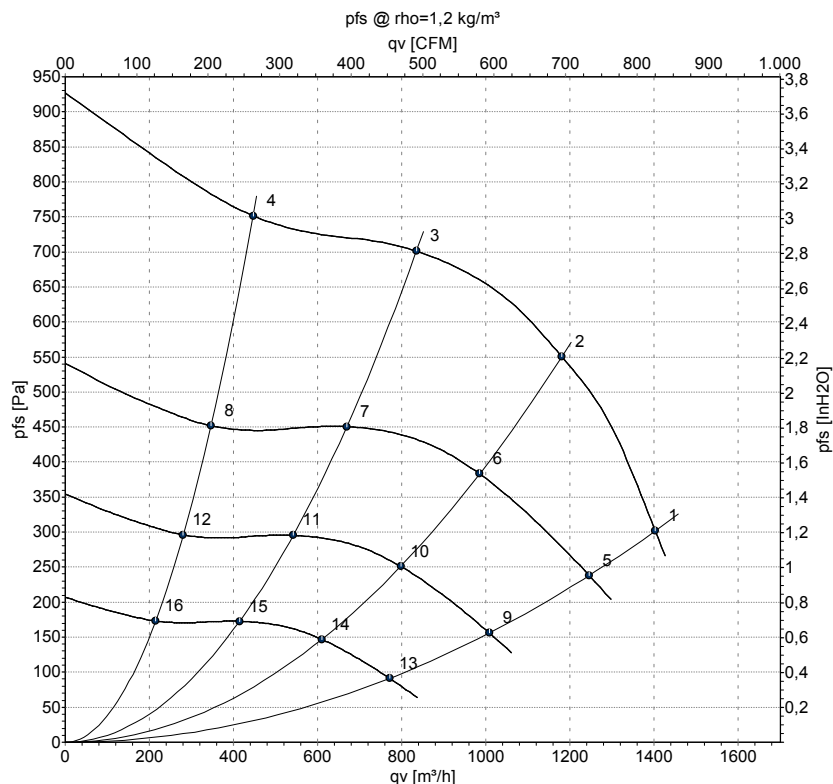

Measurement: LU-155530-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	qv	p _{fs}	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m³/h	Pa	CFM	inH2O
1	230	50	2360	500	2.20	76	81	1400	300	825	1.20
2	230	50	2515	468	2.06	74	80	1180	550	695	2.21
3	230	50	2620	353	1.56	72	78	835	700	490	2.81
4	230	50	2710	226	1.02	71	77	445	750	265	3.01
5	230	50	2100	359	1.58	73	78	1245	239	735	0.96
6	230	50	2100	272	1.20	70	75	985	385	580	1.55
7	230	50	2100	182	0.81	67	72	670	451	395	1.81
8	230	50	2100	105	0.48	65	71	345	449	205	1.80
9	230	50	1700	191	0.84	68	73	1010	157	595	0.63
10	230	50	1700	145	0.64	64	70	795	252	470	1.01
11	230	50	1700	97	0.43	61	67	540	295	320	1.18
12	230	50	1700	56	0.25	60	65	280	294	165	1.18
13	230	50	1300	85	0.37	61	66	770	92	455	0.37
14	230	50	1300	65	0.28	58	63	610	147	360	0.59
15	230	50	1300	43	0.19	54	60	415	173	245	0.69
16	230	50	1300	25	0.11	53	59	215	172	125	0.69

U = Power supply · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
qv = Air flow · p_{fs} = Pressure increase

