

EC centrifugal fan

forward-curved, single-intake
with housing (flange)

G3G180-BD43-75 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	G3G180-BD43-75	
Motor	M3G084-FA	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 277
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	2450
Power consumption	W	510
Current draw	A	3.15
Min. back pressure	Pa	300
Min. back pressure	in. wg	1.2
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	40

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (EN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	46.4	34.5	09 Power consumption P_{ed}	kW	0.31
02 Measurement category		A		09 Air flow q_v	m³/h	760
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	628
04 Efficiency grade N		55.9	44	10 Speed (rpm) n	min ⁻¹	2605
05 Variable speed drive		Yes		11 Specific ratio*		1.01

Data obtained at optimum efficiency level.
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

* Specific ratio = $1 + p_s / 100\,000\text{ Pa}$

LU-111416



EC centrifugal fan

forward-curved, single-intake
with housing (flange)

Technical description


Weight	7.5 kg
Size	180 mm
Motor size	84
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum
Impeller material	Sheet steel, galvanized
Housing material	Sheet steel, galvanized
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Any
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC max. 1.1 mA - Tach output - Motor current limitation - Soft start - Control input 0-10 VDC/PWM - Control interface with SELV potential safely disconnected from supply - Thermal overload protection for electronics/motor - Undervoltage detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-3 (household environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	≤ 3.5 mA
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 61800-5-1; CE
Approval	UL 1004-3 + 60730-1; CSA C22.2 No. 77 + CAN/CSA-E60730-1



EC centrifugal fan

forward-curved, single-intake
with housing (flange)

Product drawing

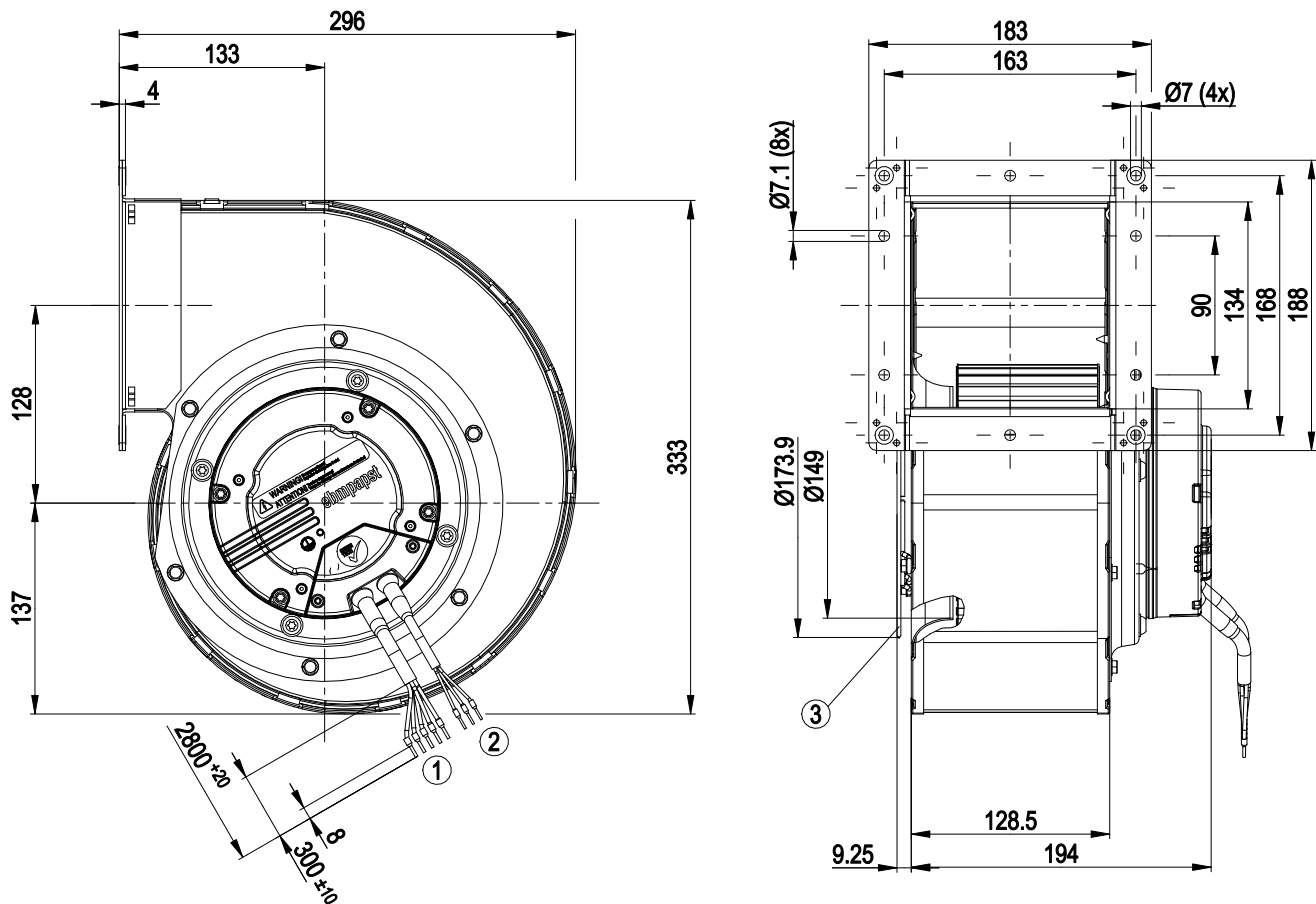


1	Cable PVC AWG 18, 5 x crimped ferrules
2	Cable PVC AWG 22, 3 x crimped ferrules
3	Guard grille 31003-2-4039

EC centrifugal fan

forward-curved, single-intake
with housing (flange)


Connection diagram

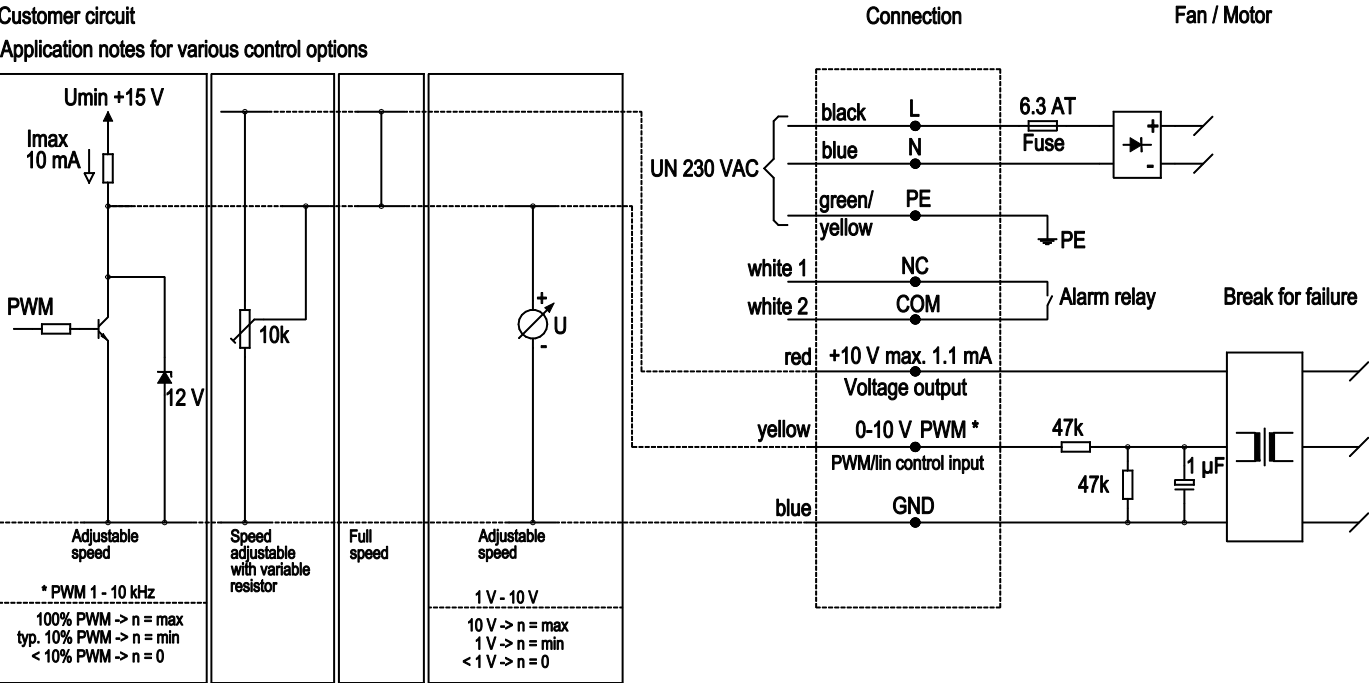

EC centrifugal fan

forward-curved, single-intake
with housing (flange)

Curves: Air performance 50 Hz

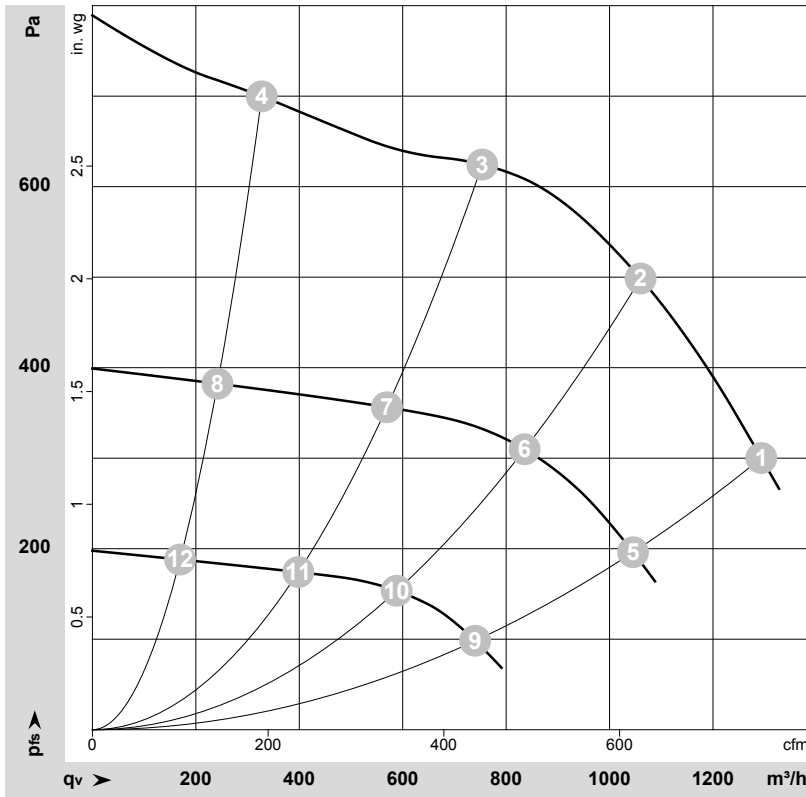

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-111416-1
Measurement: LU-112209-1
Measurement: LU-112210-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / Sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m ³ /h	Pa	cfm	in. wg
1	1~	230	50	2450	510	3.15	77	82	1295	300	760	1.20
2	1~	230	50	2525	419	2.69	75	80	1060	500	625	2.01
3	1~	230	50	2605	318	2.05	72	78	755	625	445	2.51
4	1~	230	50	2700	211	1.40	74	79	325	700	190	2.81
5	1~	230	50	2000	261	1.75	71	76	1045	210	615	0.84
6	1~	230	50	2000	194	1.31	68	74	835	320	490	1.28
7	1~	230	50	2000	124	0.88	65	72	570	361	335	1.45
8	1~	230	50	2000	93	0.68	65	72	240	383	140	1.54
9	1~	230	50	1400	93	0.68	62	67	740	108	435	0.43
10	1~	230	50	1400	73	0.54	59	65	590	157	345	0.63
11	1~	230	50	1400	45	0.35	55	62	400	175	235	0.70
12	1~	230	50	1400	39	0.31	56	62	170	188	100	0.75

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
q_v = Air flow · p_{fs} = Pressure increase

