

AC centrifugal fan

forward-curved, single-intake

with housing (large flange)

G4D180-CD04-01 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	G4D180-CD04-01				
Motor	M4D068-EC				
Phase		3~	3~	3~	3~
Nominal voltage	VAC	230	230	400	400
Wiring		Δ	Δ	Y	Y
Frequency	Hz	50	60	50	60
Method of obtaining data		fa	ml	fa	ml
Valid for approval/standard		CE	CE	CE	CE
Speed (rpm)	min ⁻¹	1250	1420	1250	1420
Power consumption	W	220	245	220	245
Current draw	A	0.66	0.69	0.38	0.4
Min. back pressure	Pa	0	120	0	120
Min. back pressure	inH ₂ O	0	0.48	0	0.48
Min. ambient temperature	°C	-25	-25	-25	-25
Max. ambient temperature	°C	45	30	45	30

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · oe = Customer equipment
Subject to change



AC centrifugal fan

forward-curved, single-intake
with housing (large flange)

Technical description


Weight	5.7 kg
Fan size	180 mm
Rotor surface	Unpainted
Impeller material	Sheet steel, galvanized
Housing material	Sheet steel, galvanized
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP44; installation- and position-dependent
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	F1-1
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	< 0.75 mA
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1, motor does not have factory-installed overheating protection; CE



AC centrifugal fan

forward-curved, single-intake
with housing (large flange)

Product drawing

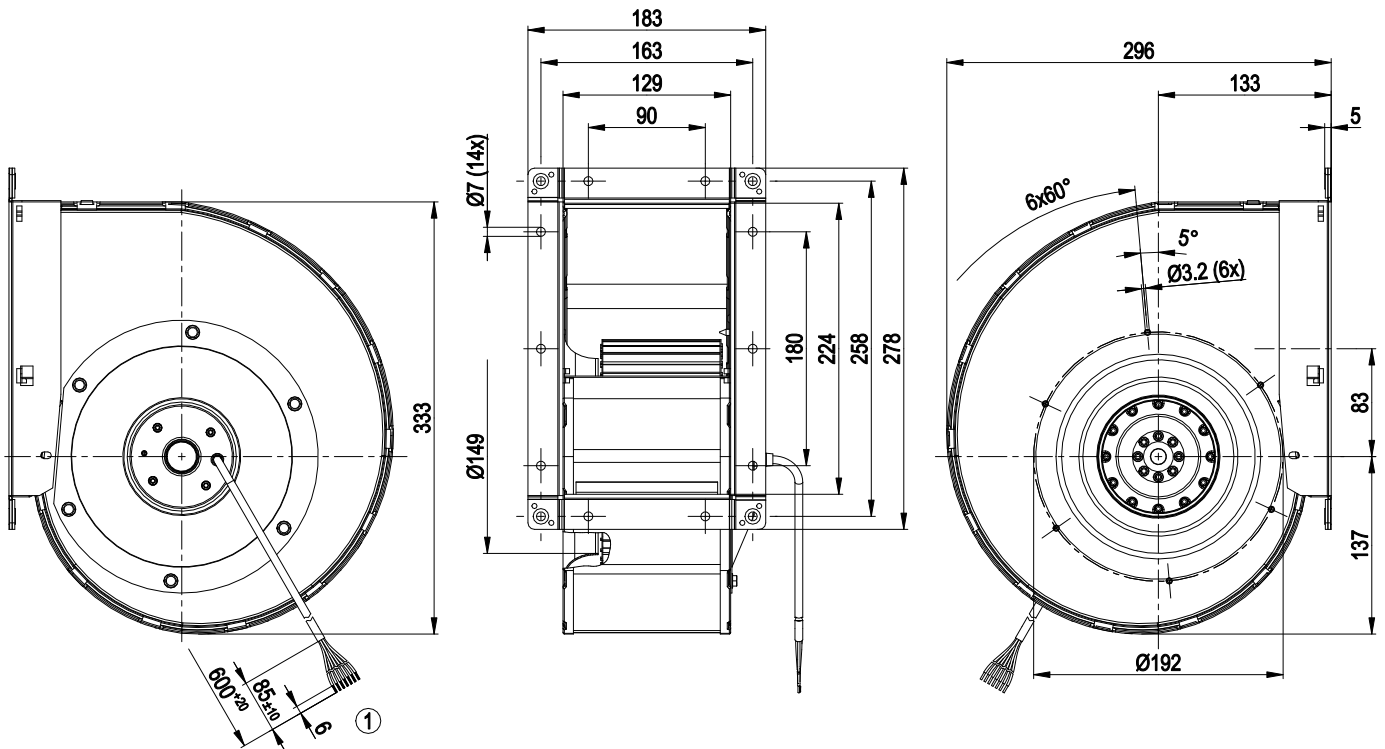


1 Cable PVC 7G 0.5 mm², 7x crimped splices

AC centrifugal fan

forward-curved, single-intake
with housing (large flange)

Connection diagram

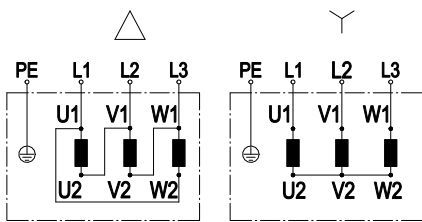

Change of rotation direction by reversing two phases


	Three-phase motor	Δ	Delta connection	Y	Star connection
L1	= U1 = black	L2	= V1 = blue	L3	= W1 = brown
U2	green	V2	white	W2	yellow
PE	green/yellow				



AC centrifugal fan

forward-curved, single-intake
with housing (large flange)

Curves: Air performance 50 Hz

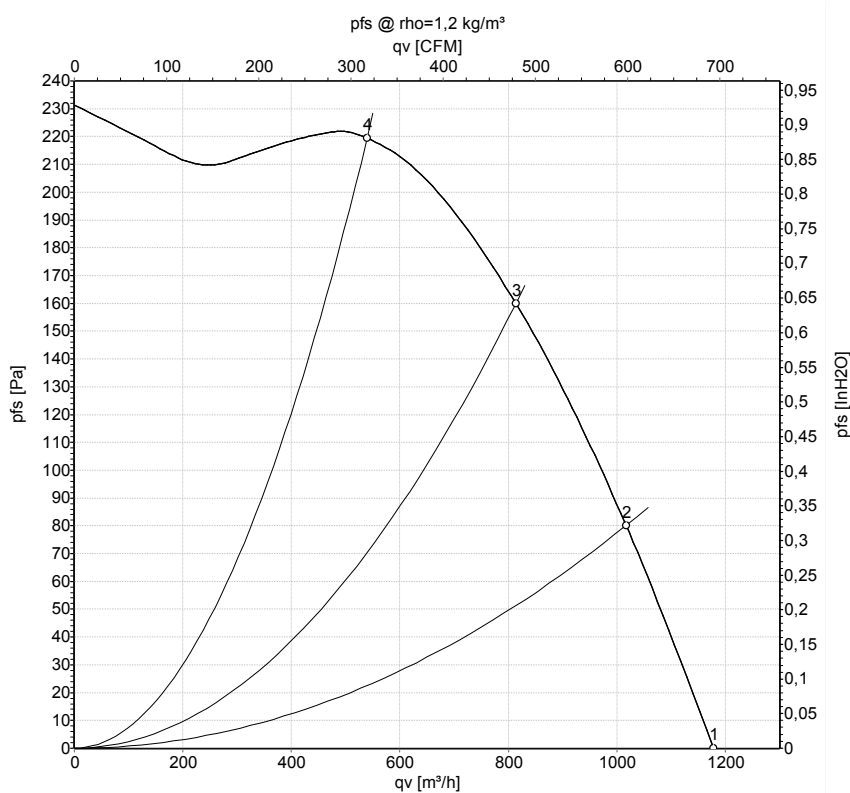

Measurement: LU-24323-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	q _v	p _{fs}	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	inH2O
1	400	50	1250	220	0.38	1180	0	695	0.00
2	400	50	1310	180	0.31	1015	80	600	0.32
3	400	50	1370	138	0.27	815	160	480	0.64
4	400	50	1420	96	0.24	540	220	320	0.88


U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase



AC centrifugal fan

forward-curved, single-intake
with housing (large flange)

Curves: Air performance 60 Hz

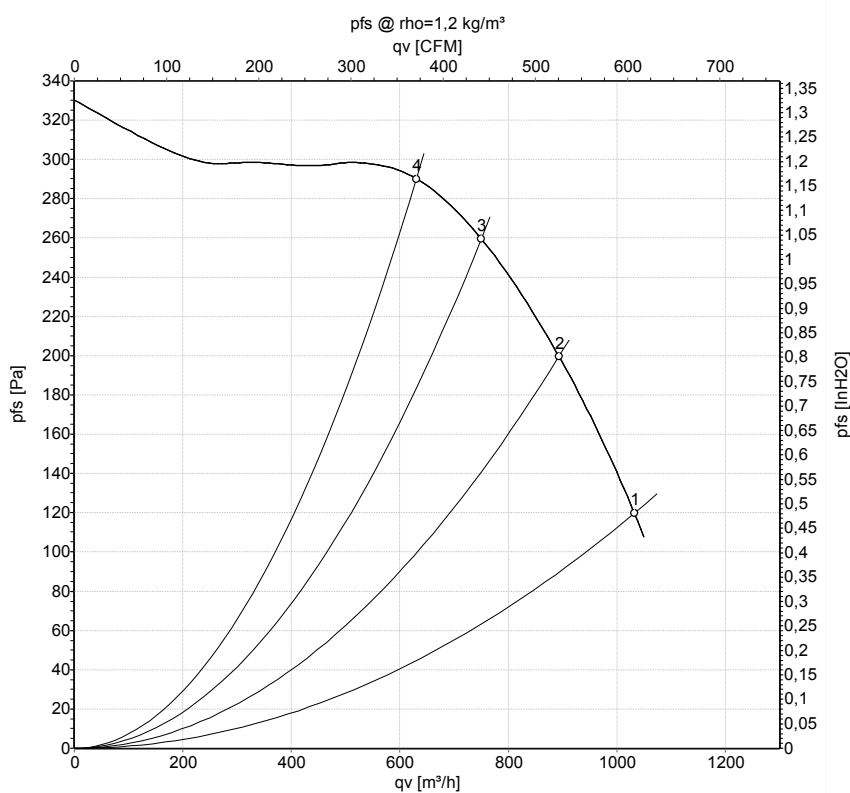

Measurement: LU-24324-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	q _v	p _{fs}	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	inH2O
1	400	60	1420	245	0.40	1030	120	605	0.48
2	400	60	1510	202	0.35	895	200	525	0.80
3	400	60	1585	163	0.30	750	260	440	1.04
4	400	60	1630	136	0.27	630	290	370	1.16

U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase

