

EC centrifugal module - RadiCal

backward-curved, single-intake
with support structure, for rail applications

K3G310-RR05-N1 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	K3G310-RR05-N1	
Motor	M3G084-DF	
Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	2650
Power consumption	W	750
Current draw	A	1.2
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (EN 17166)

		Actual	Req. 2015
01 Overall efficiency η_{es}	%	62.9	50.3
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		74.6	62
05 Variable speed drive		Yes	

Data obtained at optimum efficiency level.
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

09 Power consumption P_{ed}	kW	0.76
09 Air flow q_v	m³/h	2410
09 Pressure increase p_{fs}	Pa	661
10 Speed (rpm) n	min ⁻¹	2655
11 Specific ratio*		1.01

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-178976



Technical description

Size	310 mm
Motor size	84
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum
Impeller material	PA plastic, sheet-metal plate painted black
Inlet nozzle material	Sheet steel, galvanized
Support structure material	Aluminum
Number of blades	6
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP55
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H3
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing; (sealed)
Technical features	- Output 10 VDC, max. 10 mA - Alarm relay - Integrated PID controller - Run monitoring - Power limiter - Motor current limitation - Emergency operation - PFC, passive - RS-485 MODBUS-RTU - Soft start - EEPROM write cycles: 100,000 maximum - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Overvoltage detection - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection
EMC regulations	According to EN 50121-3-2
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Lateral
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 15085-1, CPC3: 2013; EN 45545-2, HL3: 2013 + A1:2015; EN 50155: 2007; EN 61373, Cat. 1B: 2010; CE
Approval	EAC

EC centrifugal module - RadiCal

backward-curved, single-intake

with support structure, for rail applications

Comment

A prerequisite for operation is a Class 1 vehicle electrical system architecture according to EN 50533; if supply potential (e.g. 230 VAC) is passed through the alarm relay, the SELV signal wires lose their property of reinforced insulation and they then have only basic insulation

The SELV property (reinforced insulation) is not lost when voltages of up to 110 VDC are passed through the alarm relay.




EC centrifugal module - RadiCal

backward-curved, single-intake

with support structure, for rail applications

Product drawing

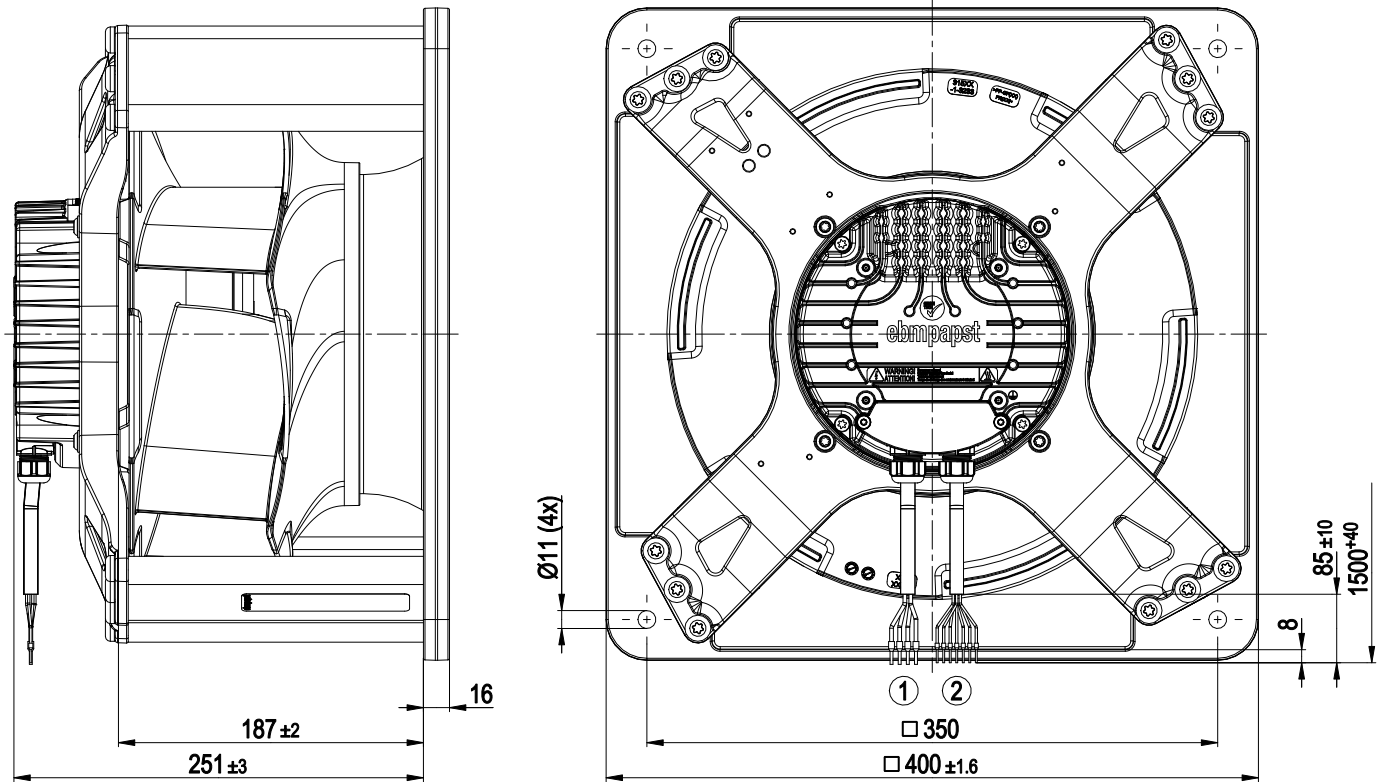


1	Cable, halogen-free, railway application EN 45545, 4G 1.5 mm ² 4x wire-end ferrule
2	Cable, halogen-free, railway application EN 45545, 7x 0.5 mm ² 7x wire-end ferrule

EC centrifugal module - RadiCal

backward-curved, single-intake

with support structure, for rail applications

Mounting dimensions

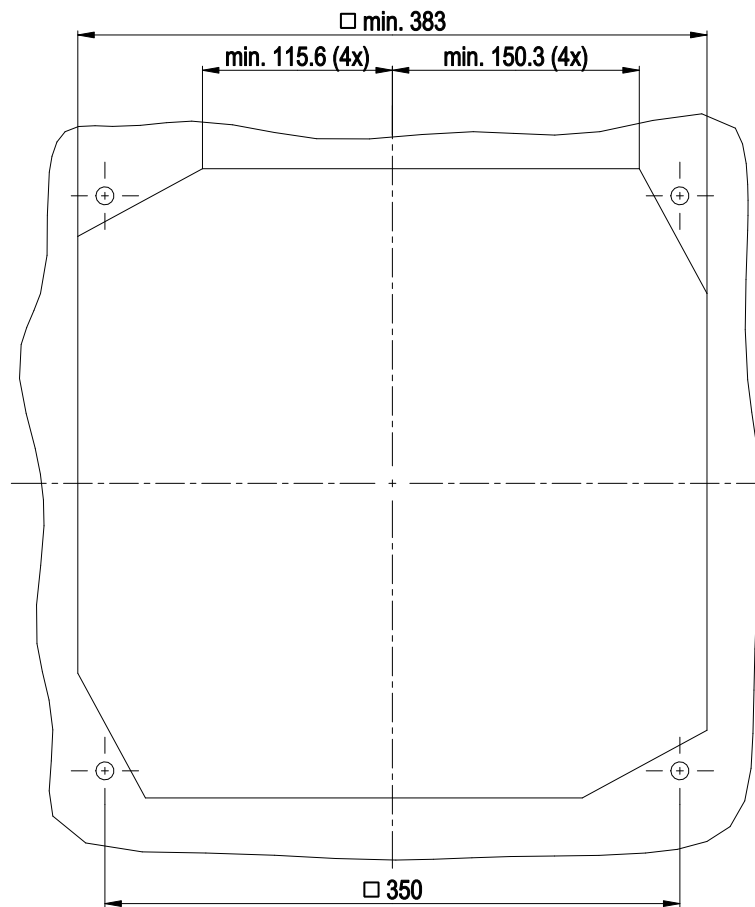


EC centrifugal module - RadiCal

backward-curved, single-intake


with support structure, for rail applications

Connection diagram

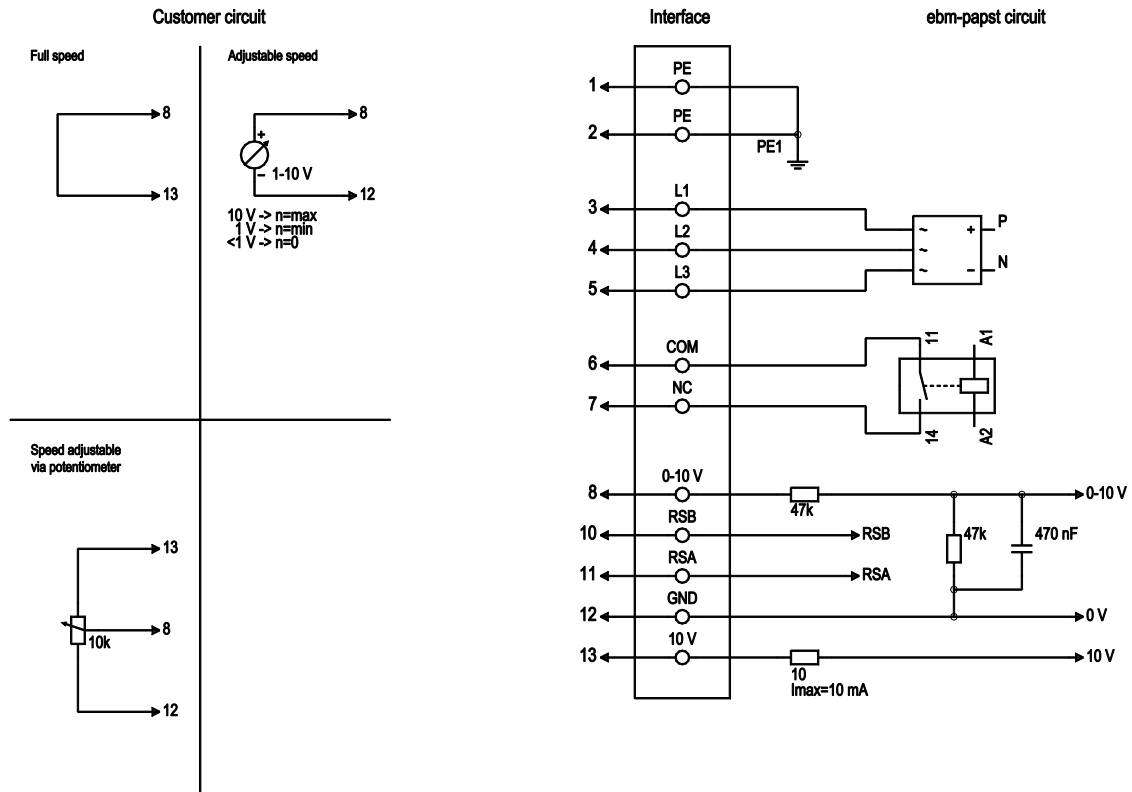

No.	Conn.	Designation	Color	Function/assignment
1	1, 2	PE	green/yellow	Protective earth
1	3	L1	black	Power supply, phase, 50/60 Hz
1	4	L2	blue	Power supply, phase, 50/60 Hz
1	5	L3	brown	Power supply, phase, 50/60 Hz
2	6	COM	gray	Status relay, floating status contact, common connection, contact rating 250 VAC / 30 VDC 5 A minimum contact separation 1 mA / 5 VDC, reinforced insulation on supply side, basic insulation on control interface side
2	7	NC	orange	Status relay, floating status contact, break for failure, contact rating 250 VAC / 30 VDC 5 A minimum contact separation 1 mA / 5 VDC, reinforced insulation on supply side, basic insulation on control interface side
2	8	0-10V	yellow	Analog input (set value) SELV, 0-10 V, Ri = 100 kΩ, adjustable curve
2	10	RSB	brown	RS485 interface for MODBUS, RSB; SELV
2	11	RSA	white	RS485 interface for MODBUS, RSA; SELV
2	12	GND	blue	Reference ground for control interface, SELV
2	13	+10V	red	Fixed voltage output 10 VDC, +10 V ± 3%, max. 10 mA, short-circuit-proof, power supply for external devices (e.g. pot); SELV

Curves: Air performance 50 Hz

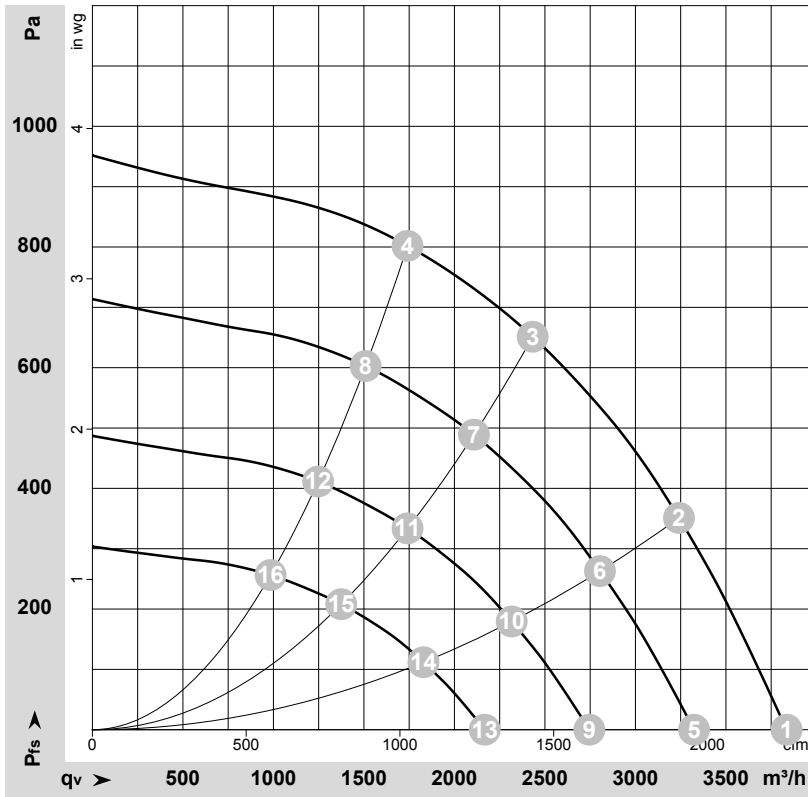

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-178976-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	q _v	p _{fs}	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m³/h	Pa	cfm	in. wg
1	400	50	2650	538	0.88	75	83	3835	0	2255	0.00
2	400	50	2650	683	1.11	72	79	3240	350	1910	1.41
3	400	50	2650	750	1.20	68	75	2435	650	1430	2.61
4	400	50	2650	721	1.17	70	78	1740	800	1025	3.21
5	400	50	2300	350	0.58	72	79	3325	0	1955	0.00
6	400	50	2300	443	0.72	68	75	2805	263	1650	1.06
7	400	50	2300	499	0.81	65	72	2110	490	1240	1.97
8	400	50	2300	470	0.76	67	74	1510	603	890	2.42
9	400	50	1900	197	0.32	67	74	2745	0	1615	0.00
10	400	50	1900	249	0.40	63	70	2315	180	1365	0.72
11	400	50	1900	281	0.45	60	67	1740	335	1025	1.34
12	400	50	1900	265	0.43	62	69	1245	412	735	1.65
13	400	50	1500	97	0.16	61	68	2170	0	1275	0.00
14	400	50	1500	123	0.20	57	64	1830	112	1075	0.45
15	400	50	1500	138	0.22	54	61	1375	209	810	0.84
16	400	50	1500	130	0.21	56	63	985	257	580	1.03

U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
q_v = Air flow · p_{fs} = Pressure increase

