

K3G400-AC30-55

Exyte Technology Shanghai Co., Ltd.

EC centrifugal module

backward-curved, single-intake

with support plate

K3G400-AC30-55 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	K3G400-AC30-55	
Motor	M3G084-FA	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 277
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	1304
Power consumption	W	370
Current draw	A	1.8 (200V)
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	30

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (EN 17166)

		Actual	Req. 2015
01 Overall efficiency η_{es}	%	58.3	46.5
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		73.8	62
05 Variable speed drive		Yes	

Data obtained at optimum efficiency level.

The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

09 Power consumption P_{ed}	kW	0.33
09 Air flow q_v	m ³ /h	2080
09 Pressure increase p_{fs}	Pa	300
10 Speed (rpm) n	min ⁻¹	1310
11 Specific ratio*		1.00

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-70774



K3G400-AC30-55

Exyte Technology Shanghai Co., Ltd.

EC centrifugal modulebackward-curved, single-intake
with support plate**Technical description**


Weight	0.001 kg
Size	400 mm
Motor size	84
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum
Impeller material	Sheet aluminum
Support plate material	Sheet aluminum
Spacer material	Aluminum
Inlet nozzle material	Sheet aluminum
Number of blades	6
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP20
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H0 - dry environment
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Rotor on top
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Technical features	- Operation and alarm display with LED - Integrated PID controller - Motor current limitation - PFC, active - RS485 ebmBUS with DCI function - Soft start - Control interface with SELV potential safely disconnected from the mains - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-4 (industrial environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	≤ 3.5 mA
Electrical hookup	Plug
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 61800-5-1
Approval	CSA C22.2 No. 77 + CAN/CSA-E60730-1; UL 1004-3 + 60730-1



EC centrifugal module


backward-curved, single-intake
with support plate

Product drawing

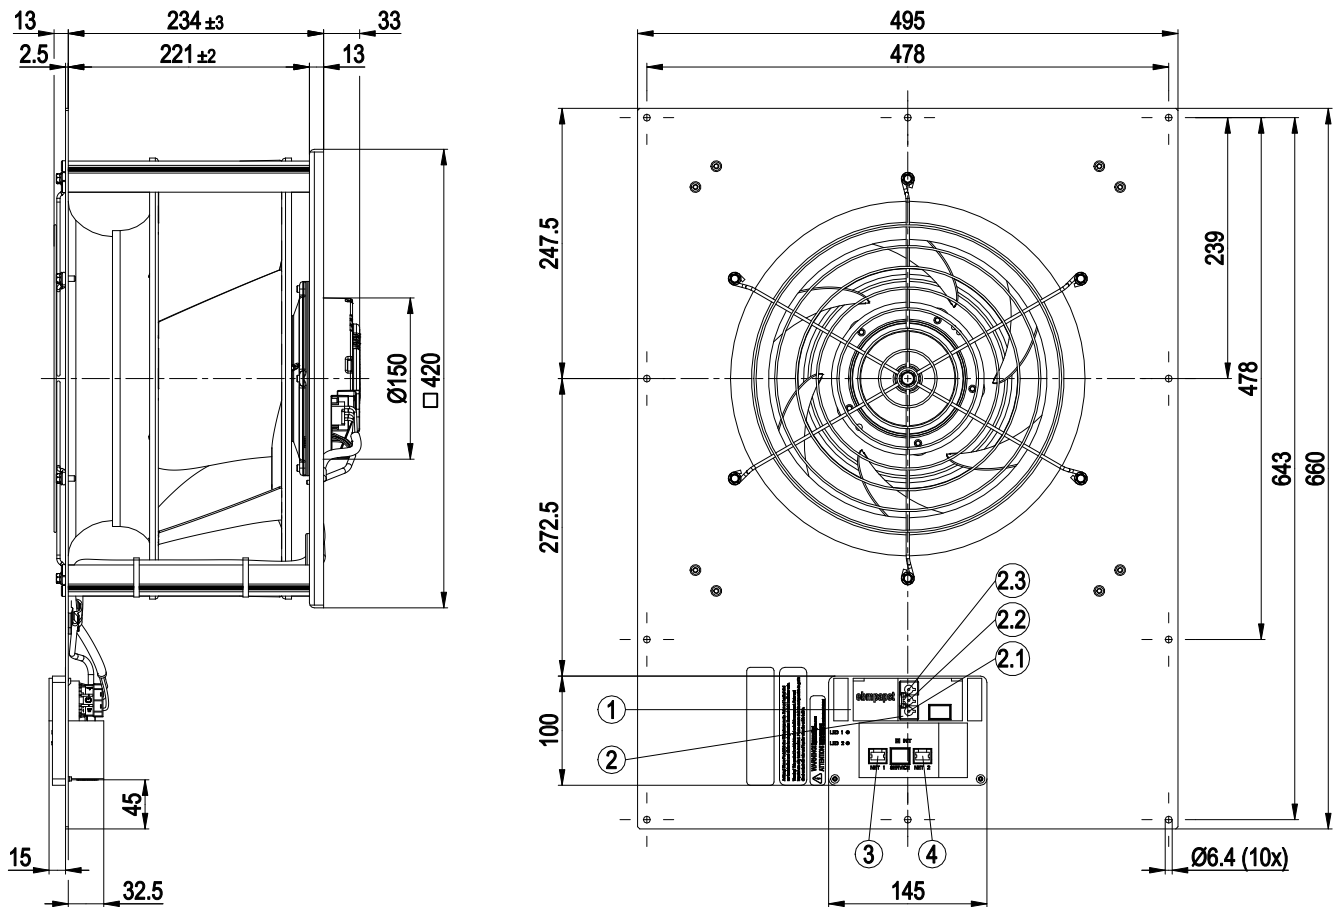

1	Terminal box
2	Connector housing 3-pole GST18/3 Wieland 92.032.9058.1
2.1	N
2.2	PE
2.3	L
3	8-pole connector housing TE 100616-2
4	8-pole connector housing TE 100616-2

Connection diagram

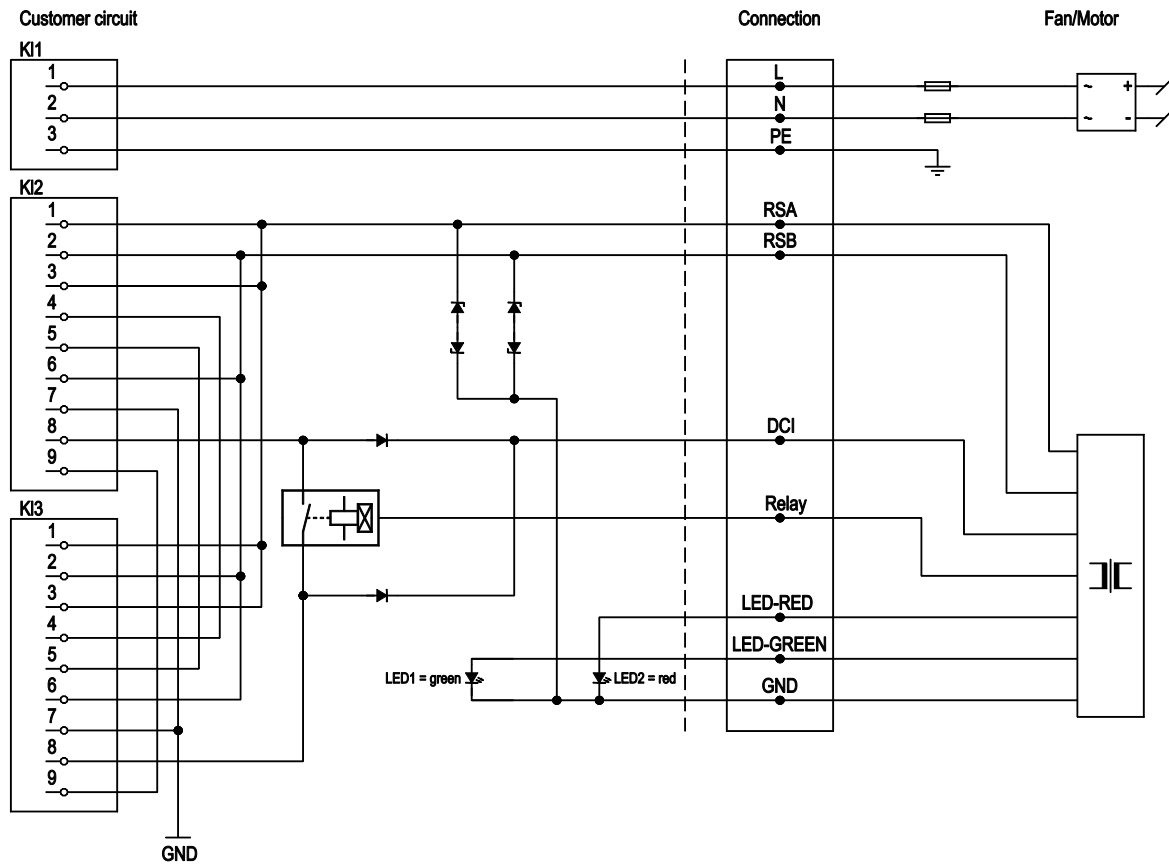


LED1 / LED2

Status	Priority	Address S/N	Speed	green LED	red LED
Malfunction	1	S/N any	any	off	flashing 1 Hz
Flashing	2	S/N = 1/1	any	flashing 10 Hz	on
Flashing	2	S/N > 1	any	flashing 10 Hz	off
after set value change	3	S/N = 1/1	any	flashing 3 times at 2.5 Hz	on
after set value change	3	S/N > 1	any	flashing 3 times at 2.5 Hz	off
Fan speed 0	4	S/N = 1/1	n = 0	flashing 1 Hz	on
Fan speed 0	4	S/N > 1	n = 0	flashing 1 Hz	off
Fan speed >0	4	S/N = 1/1	n > 0	off	on
Fan speed >0	4	S/N > 1	n > 0	on	off

No.	Conn.	Designation	Function/assignment
KL1	1	L	Power supply, phase, 50/60 Hz
KL1	2	N	Power supply, neutral conductor, 50/60 Hz
KL1	3	PE	Protective earth
KL2/KL3	1	RSA	RS485 interface for ebmbUS, RSA
KL2/KL3	2	RSB	RS485 interface for ebmbUS, RSB
KL2/KL3	3	RSA	RS485 interface for ebmbUS, RSA
KL2/KL3	4	-	Bridge KL2-KL3
KL2/KL3	5	-	Bridge KL2-KL3
KL2/KL3	6	RSB	RS485 interface for ebmbUS, RSB
KL2/KL3	7	GND	Reference ground
KL2/KL3	8	DCI	Daisy chain signal
KL2/KL3	9	Schirm	Shield for RJ45 CAT5 wire (not used)

Curves: Air performance 50 Hz

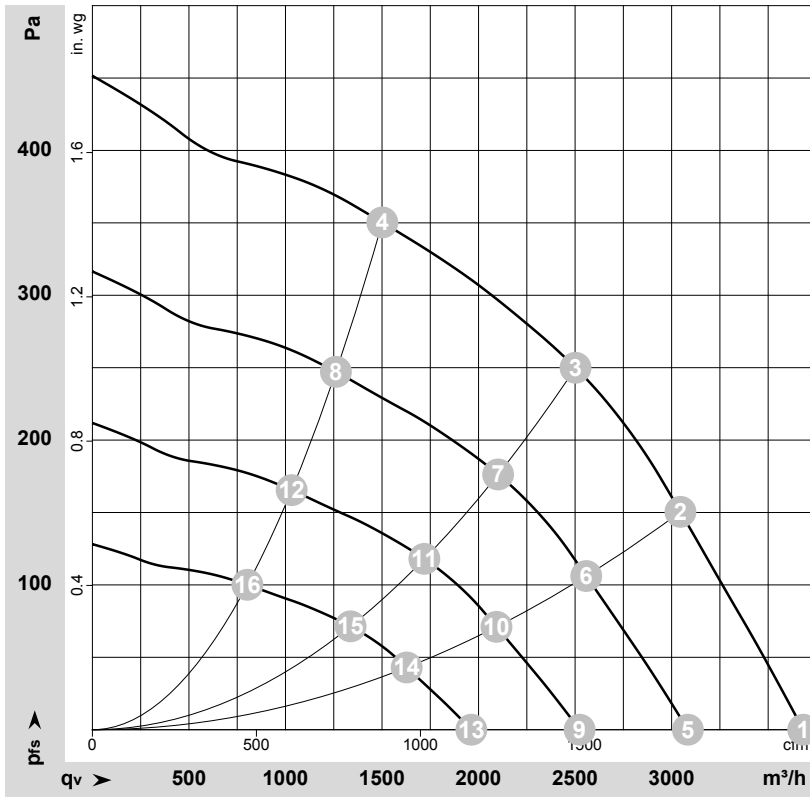

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-70774-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _{ed}	I	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	m ³ /h	Pa	cfm	in. wg
1	1~	200	50	1305	284	1.44	3680	0	2165	0.00
2	1~	200	50	1305	331	1.67	3045	150	1795	0.60
3	1~	200	50	1305	350	1.80	2500	250	1475	1.00
4	1~	200	50	1305	308	1.56	1500	350	885	1.41
5	1~	200	50	1100	167	0.85	3085	0	1815	0.00
6	1~	200	50	1100	196	0.99	2560	106	1505	0.43
7	1~	200	50	1100	207	1.04	2100	178	1235	0.71
8	1~	200	50	1100	183	0.92	1260	247	740	0.99
9	1~	200	50	900	91	0.46	2525	0	1485	0.00
10	1~	200	50	900	107	0.54	2095	71	1230	0.29
11	1~	200	50	900	114	0.57	1720	119	1010	0.48
12	1~	200	50	900	100	0.51	1030	166	605	0.67
13	1~	200	50	700	43	0.22	1965	0	1155	0.00
14	1~	200	50	700	50	0.25	1630	43	960	0.17
15	1~	200	50	700	53	0.27	1335	72	785	0.29
16	1~	200	50	700	47	0.24	805	100	475	0.40

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase