

backward curved, single inlet

with support plate

K3G400-AQ12-04 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Limited partnership · Headquarters Muldingen  
County court Stuttgart · HRA 590344General partner Elektrobau Muldingen GmbH · Headquarters Muldingen  
County court Stuttgart · HRB 590142

## Nominal data

Type	K3G400-AQ12-04	
Motor	M3G150-FF	
Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Type of data definition		ml
State		prelim.
Speed	min <sup>-1</sup>	2500
Power input	W	2950
Current draw	A	4.6
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	+40

ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit  
Subject to alterations

## Data according to ErP directive

Installation category	A
Efficiency category	Static
Variable speed drive	Yes
Specific ratio*	1.01

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$

	Actual	Request 2013	Request 2015
Overall efficiency $\eta_{es}$	64.4	52.4	56.4
Efficiency grade N	70	58	62
Power input $P_{ed}$	kW	2.95	
Air flow $q_v$	m <sup>3</sup> /h	6255	
Pressure increase $p_{fs}$	Pa	1037	
Speed n	min <sup>-1</sup>	2515	

Data established at point of optimum efficiency



### Technical features


Mass	36.5 kg
Size	400 mm
Surface of rotor	Coated in black
Material of electronics housing	Die-cast aluminum
Material of impeller	Aluminum sheet, welded
Material of mounting plate	Sheet steel, sendzimir galvanised
Material of distancing profiles	Aluminium
Number of blades	7
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"F"
Humidity class	F4-1
Max. permissible ambient motor temp. (transp./ storage)	+80 °C
Min. permissible ambient motor temp. (transp./storage)	-40 °C
Mounting position	Shaft horizontal or rotor on bottom
Condensate discharge holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing
Technical features	<ul style="list-style-type: none"> <li>- PFC, passive</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Over-temperature protected electronics / motor</li> <li>- Alarm relay</li> <li>- Integrated PID controller</li> <li>- Input for sensor 0-10 V or 4-20 mA</li> <li>- Output for slave 0-10 V</li> <li>- Output 20 VDC</li> <li>- Output 10 VDC</li> <li>- RS485 ebmBUS</li> <li>- Motor current limit</li> <li>- Soft start</li> <li>- Line undervoltage / phase failure detection</li> </ul>
EMC interference immunity	Acc. to EN 61000-6-2
EMC interference emission	Acc. to EN 61000-6-3
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Electrical leads	Via terminal box
Motor protection	Reverse polarity and locked-rotor protection
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	CE
Approval	VDE; CSA C22.2 Nr.100; UL 2111; GOST

# EC centrifugal module - Plug fan

backward curved, single inlet

with support plate

## Product drawing

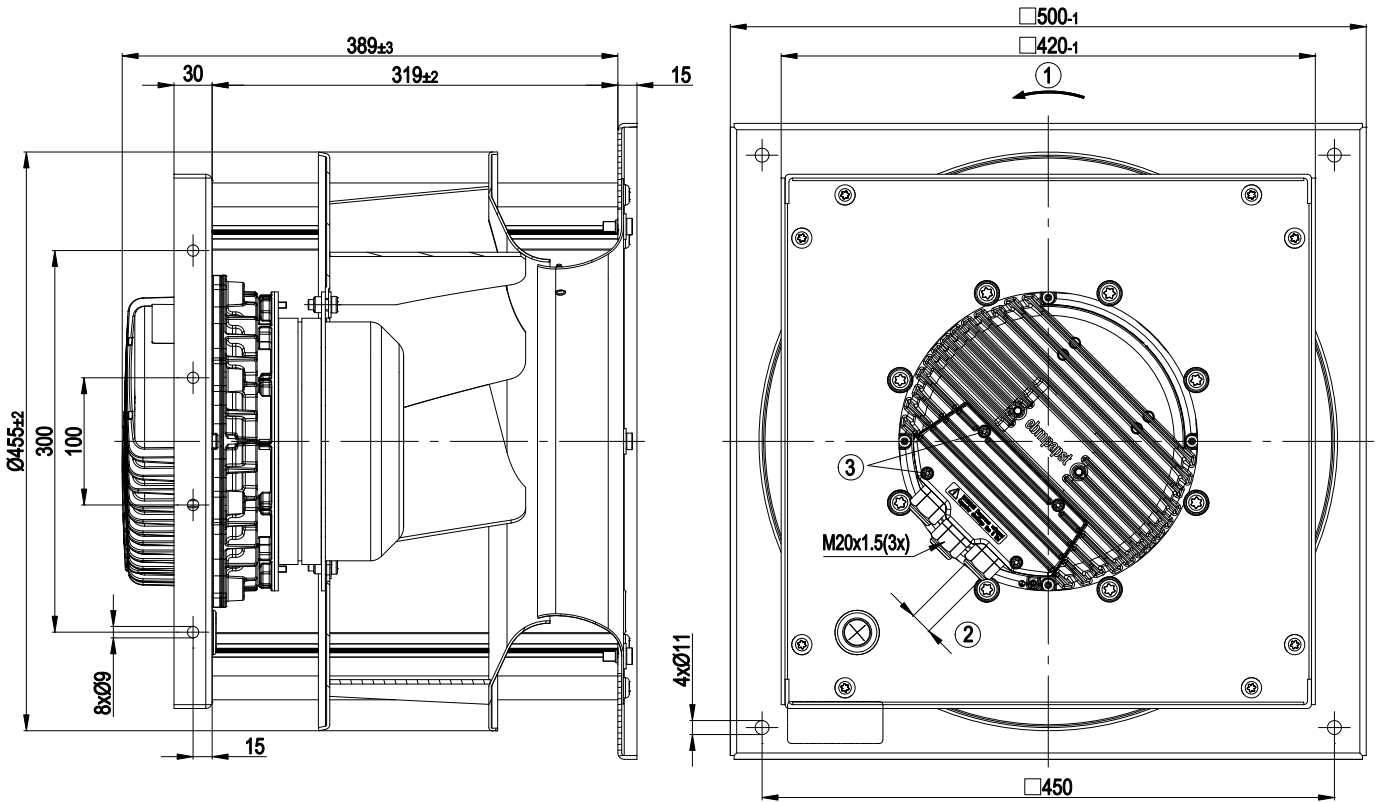

- |   |  |
|---|--|
| 1 | Direction of rotation clockwise, seen on rotor                           |
| 2 | Cable diameter: min. 4 mm, max. 10 mm; tightening torque: $4 \pm 0.4$ Nm |
| 3 | Tightening torque $2.5 \pm 0.4$ Nm                                       |




# EC centrifugal module - Plug fan

backward curved, single inlet

with support plate


## Connection screen

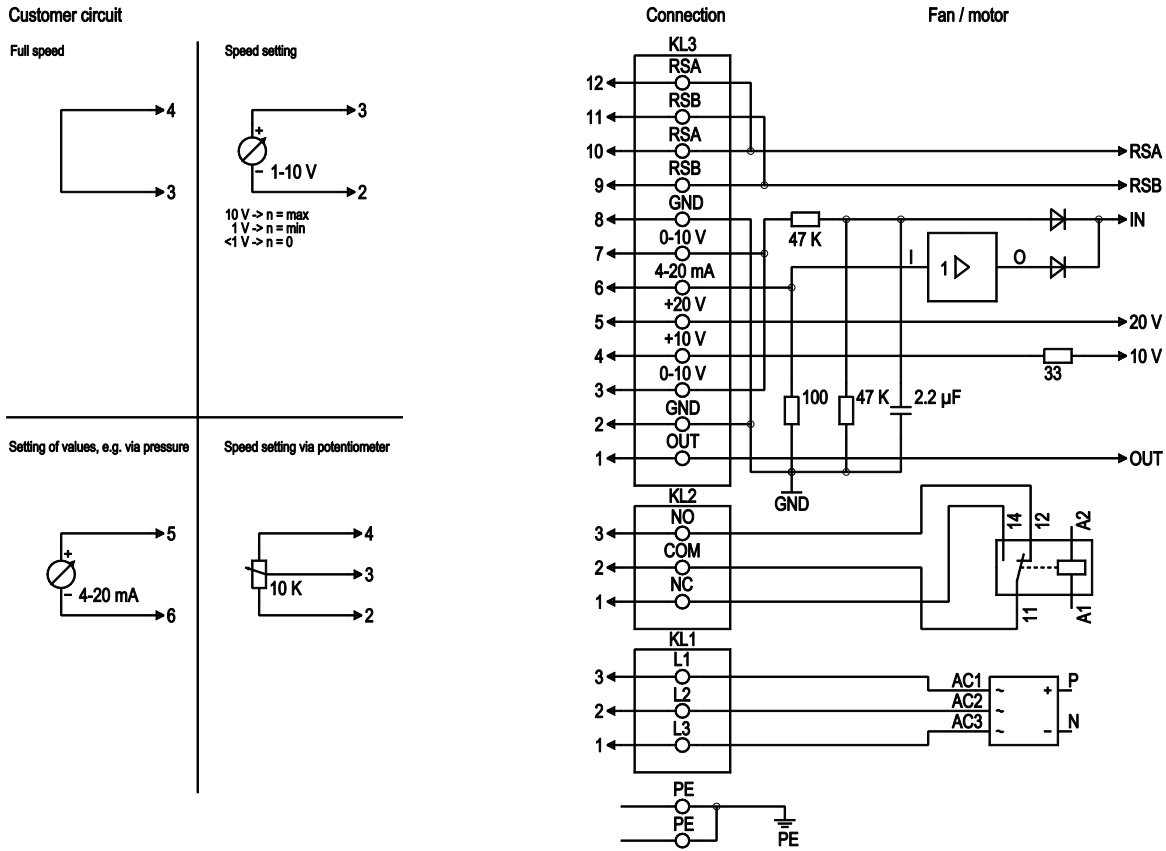

No.	Pin	Signal	Function / assignment
PE		PE	Protective earth connection
KL1	1, 2, 3	L1, L2, L3	Supply voltage, 50/60 Hz
KL2	1	NC	Floating status message contact, normally closed connection
KL2	2	COM	Floating status message contact, changeover contact, common connection (2 A, max. 250 VAC, min. 10 mA, AC1)
KL2	3	NO	Floating status message contact, normally open connection
KL3	1	OUT	Analog output, 0-10 VDC, max. 3 mA, SELV, output of the current level control coefficient: 1 V equates to 10 % level control coefficient. 10 V equate to 100 % level control coefficient.
KL3	2, 8	GND	Reference mass for control interface, SELV
KL3	3, 7	0-10 V	Use control / actual value input 0-10 VDC, impedance 100 kΩ only as alternative to 4-20 mA input, SELV
KL3	4	+10 V	Voltage output 10 VDC (+/-3 %), max. 10 mA, supply voltage for ext. devices (e.g. potentiometers), SELV
KL3	5	+20 V	Voltage output 20 VDC (+25 %/-10 %), max. 50 mA, supply voltage for ext. devices (e.g. sensors), SELV
KL3	6	4-20 mA	Use control / actual value input 4-20 mA, impedance 100 Ω, only as alternative to 0-10 V input, SELV
KL3	9, 11	RSB	RS485 interface for ebmBus, RSB, SELV
KL3	10, 12	RSA	RS485 interface for ebmBus, RSA, SELV



## Charts: Air flow 50 Hz

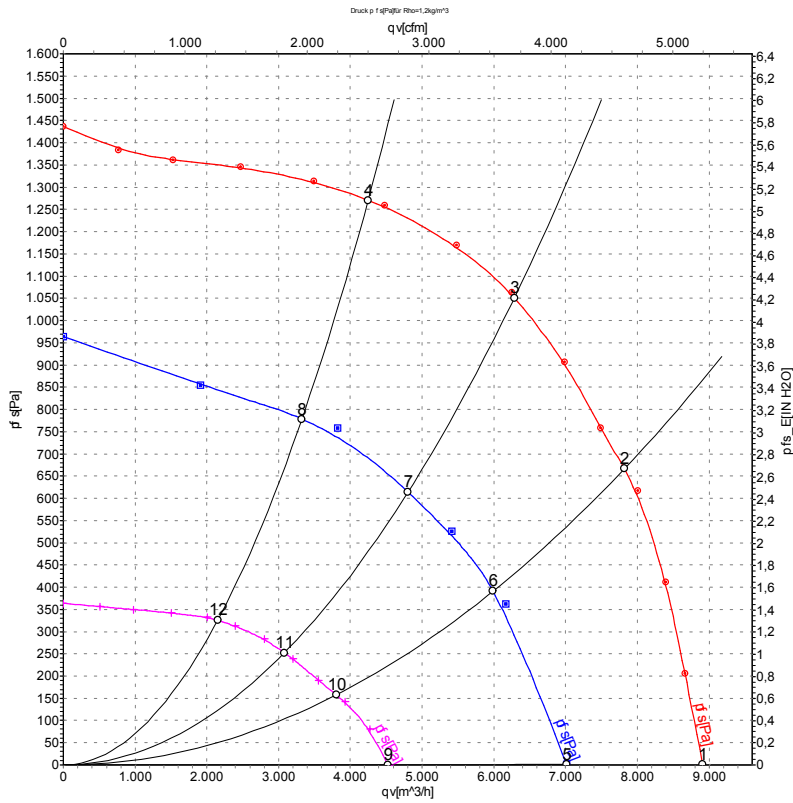

Measurement: LU-106278  
 Measurement: LU-108550  
 Measurement: LU-106283

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebmpapst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

	U	f	n	P <sub>ed</sub>	I	LpA <sub>in</sub>	LwA <sub>in</sub>	LwA <sub>out</sub>	qv	p <sub>fs</sub>
	V	Hz	min <sup>-1</sup>	W	A	dB(A)	dB(A)	dB(A)	m <sup>3</sup> /h	Pa
1	400	50	2500	2009	3.07	90	96	101	8910	0
2	400	50	2500	2738	4.19	83	89	95	7815	668
3	400	50	2500	2950	4.60	78	85	93	6285	1057
4	400	50	2500	2748	4.20	79	87	95	4250	1272
5	400	50	1945	945	1.48	82	89	93	7015	0
6	400	50	1920	1170	1.80	74	81	86	5990	401
7	400	50	1915	1247	1.91	72	78	84	4800	614
8	400	50	1920	1193	1.84	72	78	85	3325	783
9	400	50	1255	308	0.59	71	77	82	4520	0
10	400	50	1260	416	0.76	65	72	76	3805	158
11	400	50	1255	417	0.77	61	68	73	3080	252
12	400	50	1255	410	0.75	60	67	73	2150	325

U = Supply voltage · f = Frequency · n = Speed · P<sub>ed</sub> = Power input · I = Current draw · LpA<sub>in</sub> = Sound pressure level inlet side · LwA<sub>in</sub> = Sound power level inlet side · LwA<sub>out</sub> = Sound power level outlet side  
 qv = Air flow · p<sub>fs</sub> = Pressure increase

