

# EC centrifugal module

backward-curved, single-intake  
with support bracket



K3G450-AZ35-19 ebmpapst Datasheet  
sales@fansco.com  
www.fansco.com

## Nominal data

|                          |                   |            |
|--------------------------|-------------------|------------|
| Type                     | K3G450-AZ35-19    |            |
| Motor                    | M3G150-IF         |            |
| Phase                    |                   | 3~         |
| Nominal voltage          | VAC               | 200        |
| Nominal voltage range    | VAC               | 200 .. 240 |
| Frequency                | Hz                | 50/60      |
| Method of obtaining data |                   | ml         |
| Speed (rpm)              | min <sup>-1</sup> | 2750       |
| Power consumption        | W                 | 5500       |
| Current draw             | A                 | 17         |
| Min. ambient temperature | °C                | -25        |
| Max. ambient temperature | °C                | 40         |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change

## Data according to Commission Regulation (EU) 327/2011

|                                   |   | Actual | Req. 2015 |
|-----------------------------------|---|--------|-----------|
| 01 Overall efficiency $\eta_{es}$ | % | 62     | 59.3      |
| 02 Measurement category           |   | A      |           |
| 03 Efficiency category            |   | Static |           |
| 04 Efficiency grade N             |   | 64.7   | 62        |
| 05 Variable speed drive           |   | Yes    |           |

Data obtained at optimum efficiency level.  
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

|                               |                   |      |
|-------------------------------|-------------------|------|
| 09 Power consumption $P_{ed}$ | kW                | 5.5  |
| 09 Air flow $q_v$             | m <sup>3</sup> /h | 7700 |
| 09 Pressure increase $p_{fs}$ | Pa                | 1522 |
| 10 Speed (rpm) n              | min <sup>-1</sup> | 2765 |
| 11 Specific ratio*            |                   | 1.02 |

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$

LU-174763



## Technical description


|                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|----------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Weight                                                                     | 52.7 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Size                                                                       | 450 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Motor size                                                                 | 150                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Rotor surface                                                              | Painted black                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Electronics housing material                                               | Die-cast aluminum                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Impeller material                                                          | Sheet aluminum                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Support plate material                                                     | Sheet steel, galvanized                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Support bracket material                                                   | Steel, painted black                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Inlet nozzle material                                                      | Sheet steel, galvanized                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Number of blades                                                           | 7                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Direction of rotation                                                      | Clockwise, viewed toward rotor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Degree of protection                                                       | IP55                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Insulation class                                                           | "F"                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Moisture (F) / Environmental (H) protection class                          | H1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Max. permitted ambient temp. for motor (transport/storage)                 | +80 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Min. permitted ambient temp. for motor (transport/storage)                 | -40 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Installation position                                                      | Shaft horizontal or rotor on bottom; rotor on top on request                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Condensation drainage holes                                                | On rotor side                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Mode                                                                       | S1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Motor bearing                                                              | Ball bearing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Technical features                                                         | <ul style="list-style-type: none"> <li>- Output 10 VDC, max. 10 mA</li> <li>- Output 20 VDC, max. 50 mA</li> <li>- Output for slave 0-10 V</li> <li>- Input for sensor 0-10 V or 4-20 mA</li> <li>- External 24 V input (parameter setting)</li> <li>- External release input</li> <li>- Alarm relay</li> <li>- Integrated PID controller</li> <li>- Motor current limitation</li> <li>- PFC, passive</li> <li>- RS-485 MODBUS-RTU</li> <li>- Soft start</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Control interface with SELV potential safely disconnected from supply</li> <li>- Thermal overload protection for electronics/motor</li> <li>- Line undervoltage / phase failure detection</li> </ul> |
| EMC immunity to interference                                               | According to EN 61000-6-2 (industrial environment)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| EMC interference emission                                                  | According to EN 61000-6-4 (industrial environment)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system) | <= 3.5 mA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Electrical hookup                                                          | Terminal box                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Motor protection                                                           | Reverse polarity and locked-rotor protection                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Protection class                                                           | I (with customer connection of protective earth)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Conformity with standards                                                  | EN 61800-5-1; CE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Approval                                                                   | CSA C22.2 No. 77 + CAN/CSA-E60730-1; UL 1004-7 + 60730-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |



# EC centrifugal module


backward-curved, single-intake  
with support bracket

## Product drawing

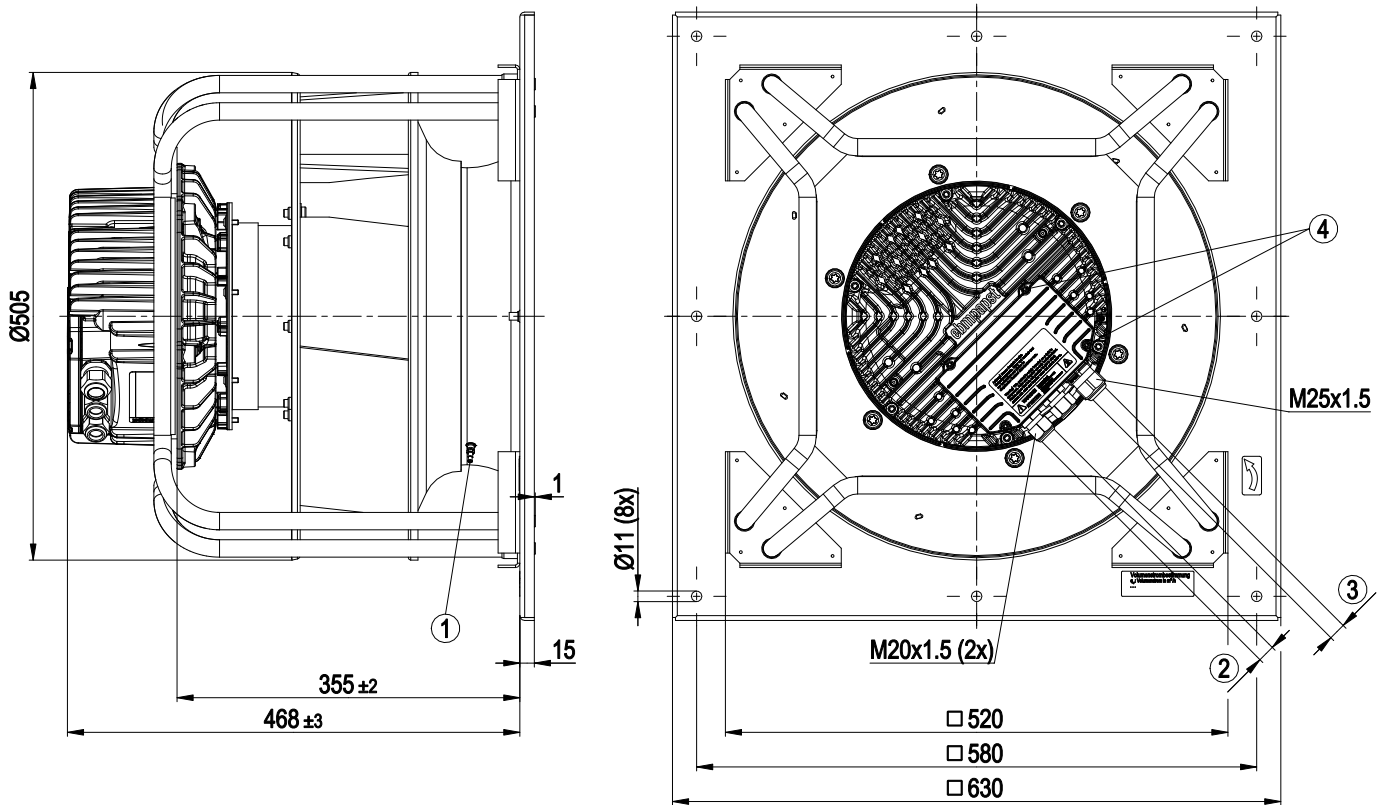

|   |                                                                        |
|---|------------------------------------------------------------------------|
| 1 | Inlet ring with pressure tap (k-factor: 240)                           |
| 2 | Cable diameter min. 4 mm, max. 10 mm, tightening torque $4 \pm 0.6$ Nm |
| 3 | Cable diameter min. 9 mm, max. 16 mm, tightening torque $6 \pm 0.9$ Nm |
| 4 | Tightening torque $3.5 \pm 0.5$ Nm                                     |

## Connection diagram

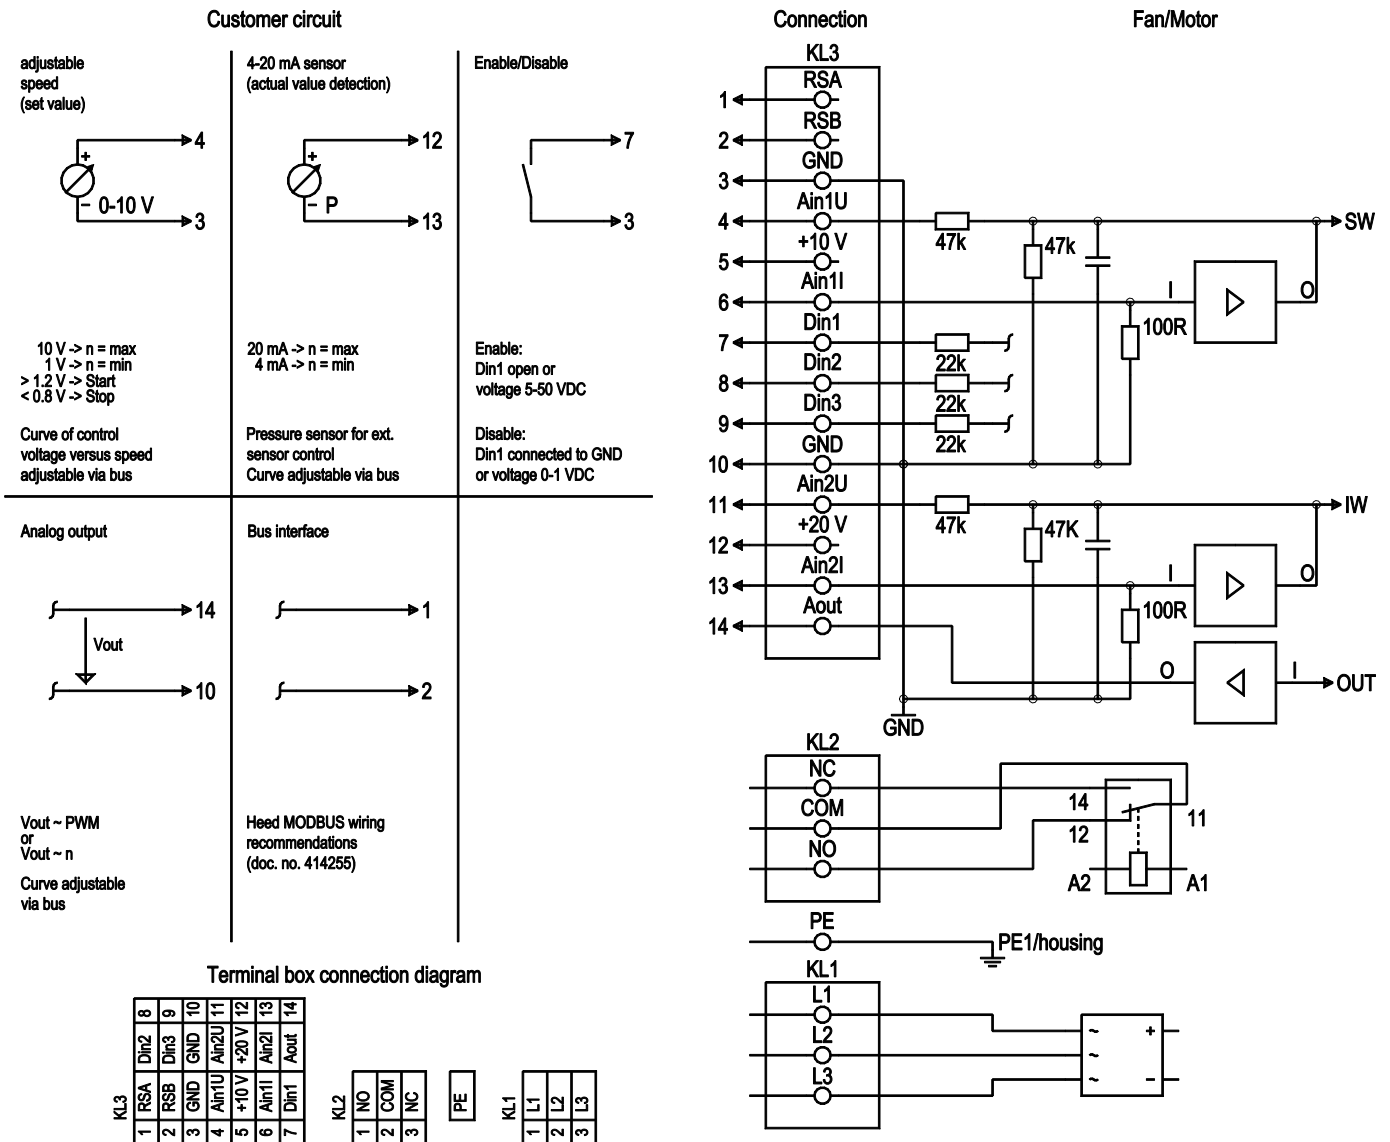

| No.  | Conn.  | Designation | Function/assignment                                                                                                             |
|------|--------|-------------|---------------------------------------------------------------------------------------------------------------------------------|
| KL 1 | 1      | L1          | Supply connection, power supply, phase, see nameplate for voltage range                                                         |
| KL 1 | 2      | L2          | Supply connection, power supply, phase, see nameplate for voltage range                                                         |
| KL 1 | 3      | L3          | Supply connection, power supply, phase, see nameplate for voltage range                                                         |
| PE   |        | PE          | Ground connection, PE connection                                                                                                |
| KL 2 | 1      | NO          | Status relay, floating status contact, make for failure                                                                         |
| KL 2 | 2      | COM         | Status relay, floating status contact, changeover contact, common connection, contact rating, max. 250 VAC/2 A (AC1)/min. 10 mA |
| KL 2 | 3      | NC          | Status relay, floating status contact, break for failure                                                                        |
| KL 3 | 1      | RSA         | Bus connection RS485, RSA, MODBUS RTU; SELV                                                                                     |
| KL 3 | 2      | RSB         | Bus connection RS485, RSB, MODBUS RTU; SELV                                                                                     |
| KL 3 | 3 / 10 | GND         | Reference ground for control interface, SELV                                                                                    |
| KL 3 | 4      | Ain1 U      | Analog input 1, set value: 0-10 V, Ri = 100 kΩ, adjustable curve, only usable as alternative to input Ain1 I; SELV              |

# EC centrifugal module


backward-curved, single-intake

with support bracket

| No.  | Conn. | Designation | Function/assignment                                                                                                                                                                                                                                                                                                    |
|------|-------|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| KL 3 | 5     | + 10 V      | Fixed voltage output 10 VDC, +10 V $\pm$ 3%, max. 10 mA, short-circuit-proof, power supply for external devices (e.g. pot); SELV                                                                                                                                                                                       |
| KL 3 | 6     | Ain1 I      | Analog input 1, set value: 4-20 mA, $R_i$ = 100 $\Omega$ , adjustable curve, only usable as alternative to input Ain1 U; SELV                                                                                                                                                                                          |
| KL 3 | 7     | Din1        | Digital input 1: enable electronics,<br>enable: pin open or applied voltage 5-50 VDC<br>disable: bridge to GND or applied voltage < 1 VDC<br>reset function: triggers software reset after a level change to < 1 VDC; SELV                                                                                             |
| KL 3 | 8     | Din2        | Digital input 2: Switching parameter sets 1/2, according to EEPROM setting, the valid or used parameter set can be selected via bus or via digital input DIN2.<br>Parameter set 1: pin open or applied voltage 5-50 VDC<br>Parameter set 2: bridge to GND or applied voltage < 1 VDC; SELV                             |
| KL 3 | 9     | Din3        | Digital input 3: Direction of action of integrated controller, according to EEPROM setting, the direction of action of the integrated controller can be selected as normal/inverse via bus or digital input<br>Normal: Pin open or applied voltage 5-50 VDC<br>Inverse: Bridge to GND or applied voltage < 1 VDC; SELV |
| KL 3 | 11    | Ain2 U      | Analog input 2, measured value: 0-10 V, $R_i$ = 100 k $\Omega$ , adjustable curve, only usable as alternative to input Ain2 I; SELV                                                                                                                                                                                    |
| KL 3 | 12    | + 20 V      | Fixed voltage output 20 VDC, +20 V $\pm$ 25/-10%, max. 50 mA, short-circuit-proof, power supply for external devices (e.g. sensors); SELV<br>Alternatively: +24 VDC input for parameterization without line voltage                                                                                                    |
| KL 3 | 13    | Ain2 I      | Analog input 2, measured value: 4-20 mA, $R_i$ = 100 $\Omega$ , adjustable curve, only usable as alternative to input Ain2 U; SELV                                                                                                                                                                                     |
| KL 3 | 14    | Aout        | Analog output 0-10 V, max. 5 mA, output of current motor modulation level; adjustable curve; SELV                                                                                                                                                                                                                      |



## Curves: Air performance 50 Hz

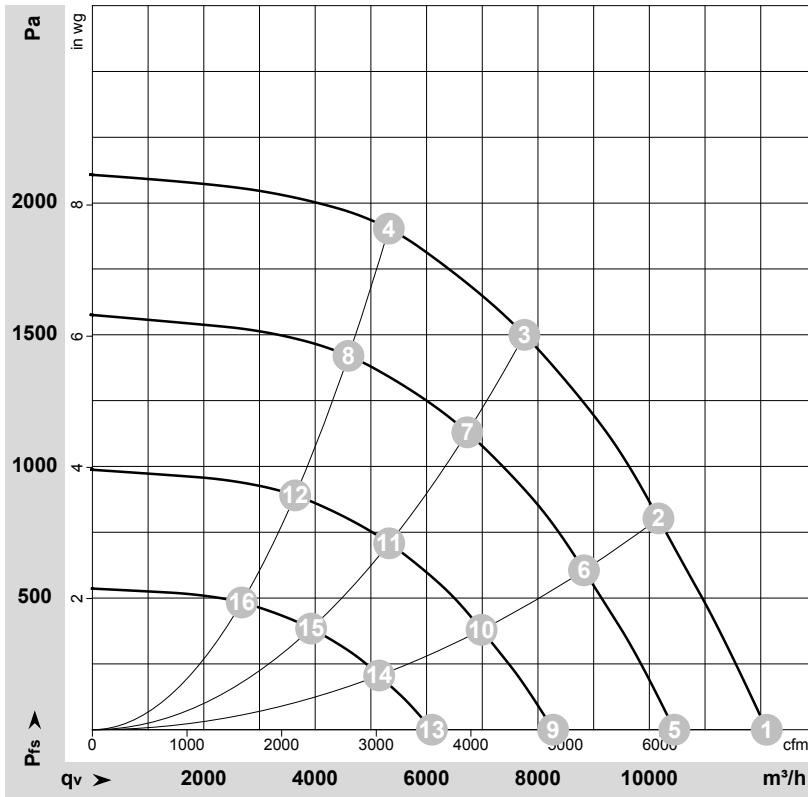

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-174763-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

|    | U   | f  | n                 | P <sub>ed</sub> | I     | LpA <sub>in</sub> | LwA <sub>in</sub> | LwA <sub>out</sub> | q <sub>v</sub>    | P <sub>fs</sub> | q <sub>v</sub> | P <sub>fs</sub> |
|----|-----|----|-------------------|-----------------|-------|-------------------|-------------------|--------------------|-------------------|-----------------|----------------|-----------------|
|    | V   | Hz | min <sup>-1</sup> | W               | A     | dB(A)             | dB(A)             | dB(A)              | m <sup>3</sup> /h | Pa              | cfm            | in. wg          |
| 1  | 200 | 50 | 2750              | 3641            | 11.16 | 92                | 101               | 107                | 12110             | 0               | 7125           | 0.00            |
| 2  | 200 | 50 | 2750              | 4748            | 14.59 | 86                | 94                | 101                | 10165             | 800             | 5980           | 3.21            |
| 3  | 200 | 50 | 2750              | 5500            | 17.00 | 82                | 89                | 97                 | 7755              | 1500            | 4565           | 6.02            |
| 4  | 200 | 50 | 2750              | 5358            | 16.51 | 86                | 95                | 98                 | 5320              | 1900            | 3130           | 7.63            |
| 5  | 200 | 50 | 2400              | 2340            | 7.17  | 88                | 97                | 103                | 10450             | 0               | 6150           | 0.00            |
| 6  | 200 | 50 | 2400              | 3110            | 9.56  | 83                | 90                | 97                 | 8825              | 605             | 5195           | 2.43            |
| 7  | 200 | 50 | 2400              | 3594            | 11.08 | 79                | 86                | 93                 | 6730              | 1135            | 3960           | 4.56            |
| 8  | 200 | 50 | 2400              | 3448            | 10.63 | 82                | 91                | 94                 | 4595              | 1427            | 2705           | 5.73            |
| 9  | 200 | 50 | 1900              | 1161            | 3.56  | 82                | 91                | 97                 | 8270              | 0               | 4870           | 0.00            |
| 10 | 200 | 50 | 1900              | 1543            | 4.74  | 77                | 84                | 91                 | 6985              | 379             | 4110           | 1.52            |
| 11 | 200 | 50 | 1900              | 1783            | 5.50  | 73                | 80                | 87                 | 5330              | 712             | 3135           | 2.86            |
| 12 | 200 | 50 | 1900              | 1711            | 5.27  | 76                | 85                | 89                 | 3640              | 894             | 2140           | 3.59            |
| 13 | 200 | 50 | 1400              | 465             | 1.42  | 74                | 83                | 89                 | 6095              | 0               | 3585           | 0.00            |
| 14 | 200 | 50 | 1400              | 617             | 1.90  | 69                | 77                | 83                 | 5150              | 206             | 3030           | 0.83            |
| 15 | 200 | 50 | 1400              | 713             | 2.20  | 65                | 72                | 80                 | 3925              | 386             | 2310           | 1.55            |
| 16 | 200 | 50 | 1400              | 684             | 2.11  | 69                | 78                | 81                 | 2680              | 485             | 1580           | 1.95            |

U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
 LwA<sub>out</sub> = Sound power level outlet side · q<sub>v</sub> = Air flow · P<sub>fs</sub> = Pressure increase

