

R2E210-AA34-19 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	R2E210-AA34-19	
Motor	M2E068-DF	
Phase		1~
Nominal voltage	VAC	230
Frequency	Hz	50
Type of data definition		fa
Valid for approval / standard		CE
Speed (rpm)	min ⁻¹	2500
Power input	W	110
Current draw	A	0.49
Motor capacitor	µF	2
Capacitor voltage	VDB	420
Capacitor standard		S0 (CE)
Min. back pressure	Pa	0
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	90

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations




Technical features

Mass	3.6 kg
Size	210 mm
Surface of rotor	Partially cast in aluminium
Material of impeller	Sheet steel, stainless
Material of mounting plate	Sheet steel, hot-dip galvanised
Number of blades	6
Motor suspension	Motor anti-vibration mounted on one side via mounting plate
Direction of rotation	Counter-clockwise, seen on rotor
Type of protection	IP 44; Depending on installation and position
Insulation class	"F"
Humidity (F)/environmental protection class (H)	H0 - dry environment
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Any
Condensate discharge holes	None
Operation mode	S1
Motor bearing	Ball bearing
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	< 0.75 mA
Motor protection	Thermal overload protector (TOP) wired internally
Cable exit	Variable
Protection class	I (if protective earth is connected by customer)
Motor capacitor according to EN 60252-1 in safety protection class	S2
Product conforming to standard	EN 60335-1; CE




Product drawing

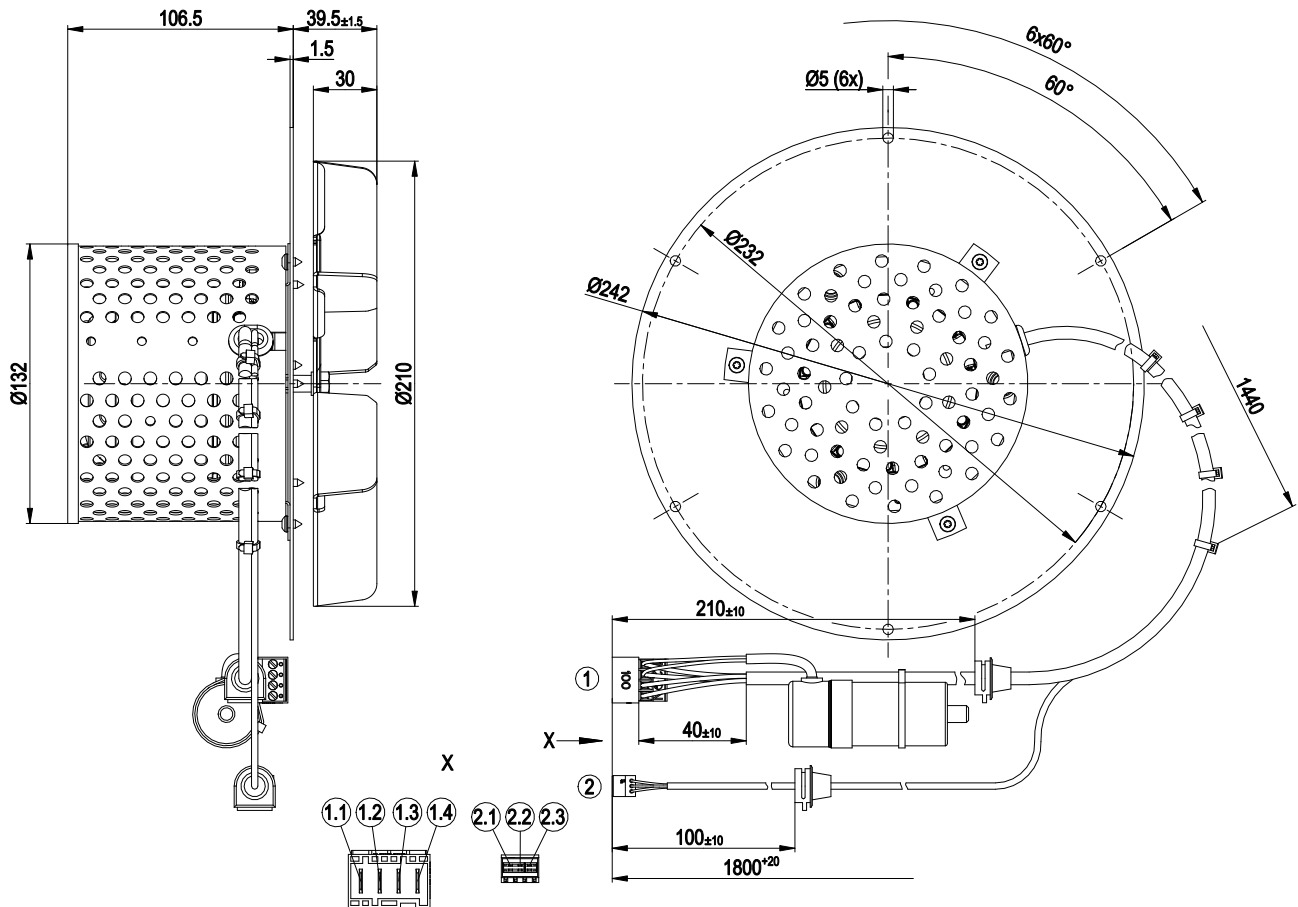

1	Connection line silicone 4G 0.75 mm², 1x connector housing Lumberg 4-pole 3618 04
1.1	black + capacitor
1.2	brown + capacitor
1.3	green/yellow (PE)
1.4	grey (N)
2	Connection line Raychem Spec. 44, AWG24, 1x connector housing Lumberg 3-pole 3517 03
2.1	red (Hall IC)
2.2	white (Hall IC)
2.3	black (Hall IC)


Connection screen

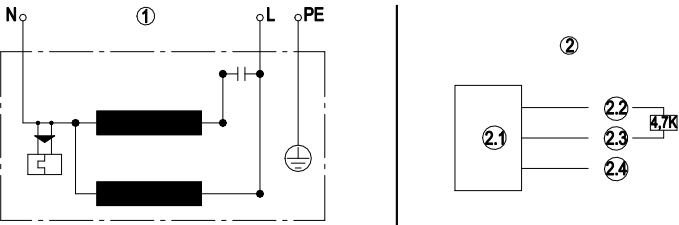

1	Fan connection diagram
N	grey
L	black
PE	green/yellow
2	Hall IC circuit
2.1	Hall IC
2.2	Red (+5V)
2.3	White (out)
2.4	Black (0V)



Charts: Air flow 50 Hz

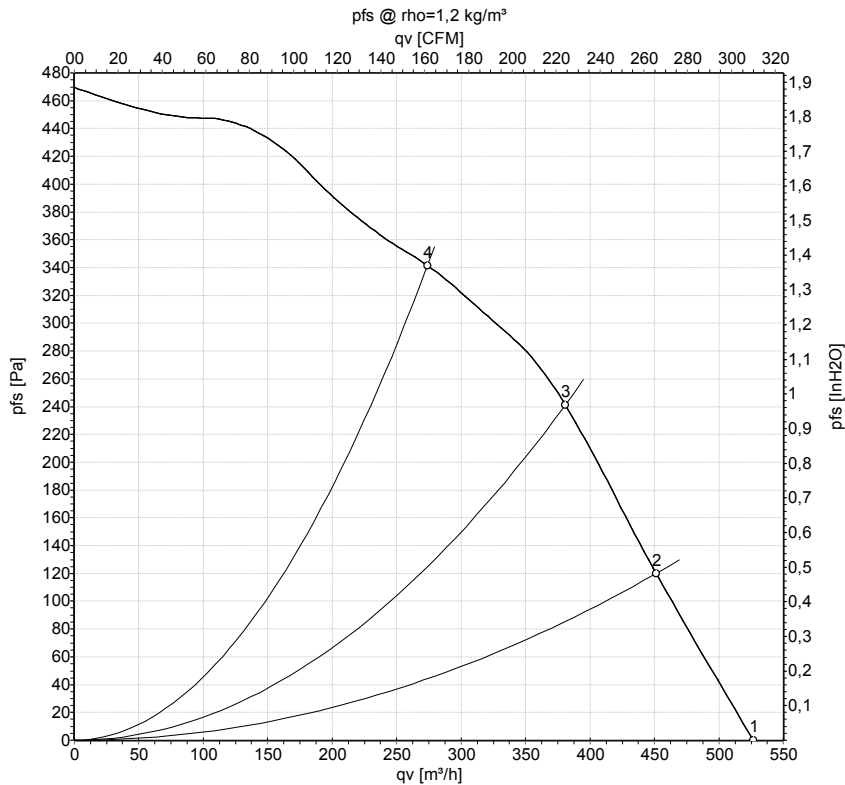

Measurement: LU-148468-1

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: LwA measured as per ISO 13347 /
LpA measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	U	f	n	P _e	I	q _v	p _{fs}	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	inH2O
1	230	50	2500	110	0.49	525	0	310	0.00
2	230	50	2495	109	0.48	450	120	265	0.48
3	230	50	2550	102	0.44	380	240	225	0.96
4	230	50	2660	87	0.38	275	340	160	1.36

U = Supply voltage · f = Frequency · n = Speed (rpm) · P_e = Power input · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase

