

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Type	R3G175-RD53-08	
Motor	M3G055-CF	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	4720
Power consumption	W	166
Current draw	A	1.4
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment

Subject to change

Data according to Commission Regulation (EU) 327/2011 (EN 17166)

		Actual	Req. 2015
01 Overall efficiency η_{es}	%	56.9	43.1
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		75.8	62
05 Variable speed drive		Yes	

Data obtained at optimum efficiency level.

The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

09 Power consumption P_{ed}	kW	0.15
09 Air flow q_v	m ³ /h	560
09 Pressure increase p_{fs}	Pa	512
10 Speed (rpm) n	min ⁻¹	4710
11 Specific ratio*		1.01

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-160714




Technical description

Weight	1.4 kg
Size	175 mm
Motor size	55
Rotor surface	Thick-film passivated
Impeller material	PA plastic
Number of blades	7
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing
Technical features	- Auto-addressing can be activated by BUS - Power limiter - Motor current limitation - RS-485 MODBUS-RTU - Soft start - Control interface with SELV potential safely disconnected from the mains - Overvoltage detection - Thermal overload protection for electronics/motor - Line undervoltage detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-3 (household environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Electronic motor protection
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1; CE
Approval	UL 1004-7 + 60730-1; CSA C22.2 No. 77 + CAN/CSA-E60730-1




Product drawing

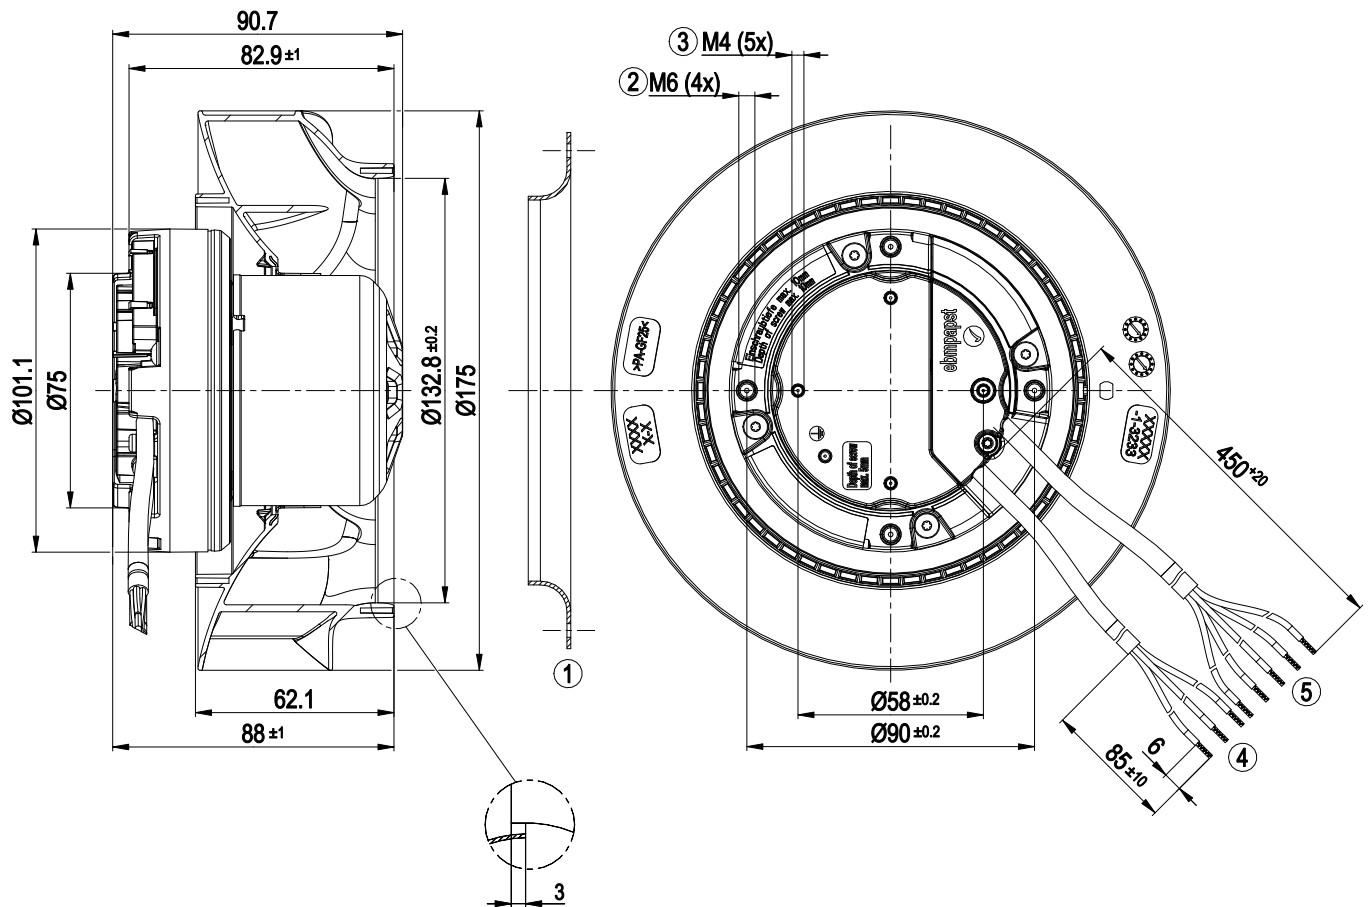


1	Accessory part: inlet ring 09576-2-4013 not included in scope of delivery
2	Max. clearance for screw 10 mm
3	Max. clearance for screw 5 mm
4	Cable PVC AWG20
	3x splice
5	Cable PVC AWG22
	5x splice

Accessory part

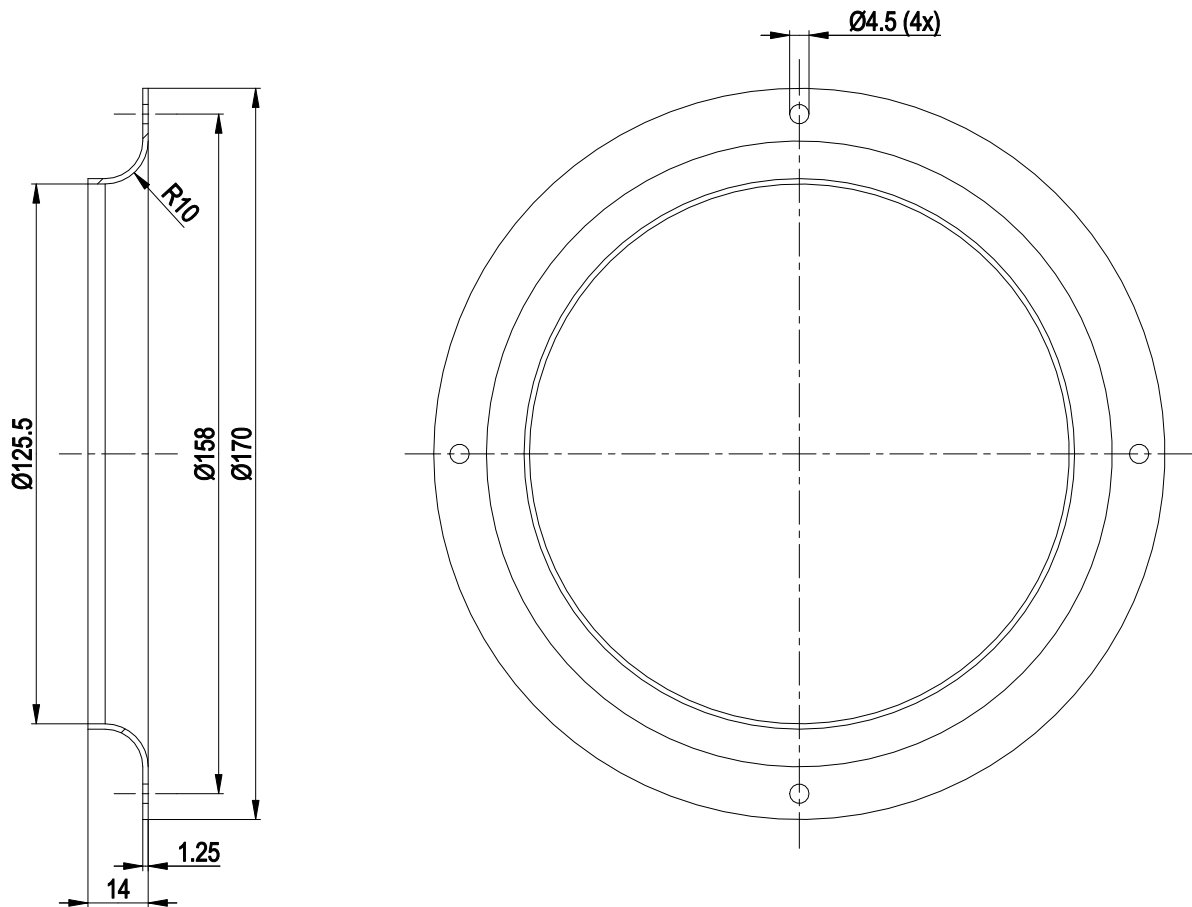


1 Accessory part: inlet ring 09576-2-4013 not included in scope of delivery

Connection diagram

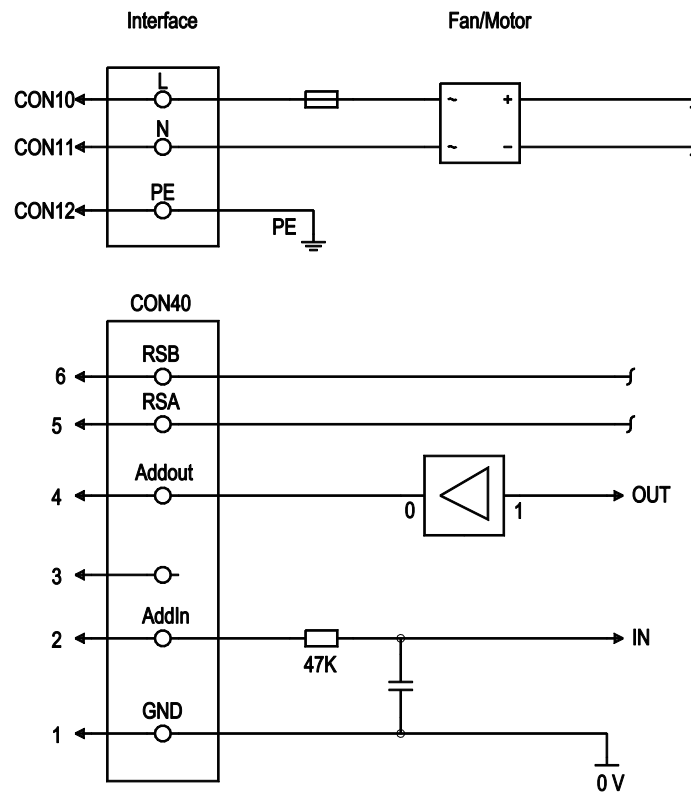

No.	Conn.	Designation	Color	Function/assignment
	CON10	L	black	Power supply, phase, see nameplate for voltage range
	CON11	N	blue	Power supply, neutral conductor, see nameplate for voltage range
	CON12	PE	green/yellow	Protective earth
CON40	6	RSB	brown	RS-485 interface for MODBUS, RSB; SELV
CON40	5	RSA	white	RS485 interface for MODBUS, RSA; SELV
CON40	4	AddOut /max. 10 mA	gray	Addressing output 10 V, SELV
CON40	3			not used
CON40	2	AddIn	yellow	Addressing input U _{max} = 48 VDC, SELV
CON40	1	GND	blue	Reference ground for interface, SELV

Curves: Air performance 50 Hz

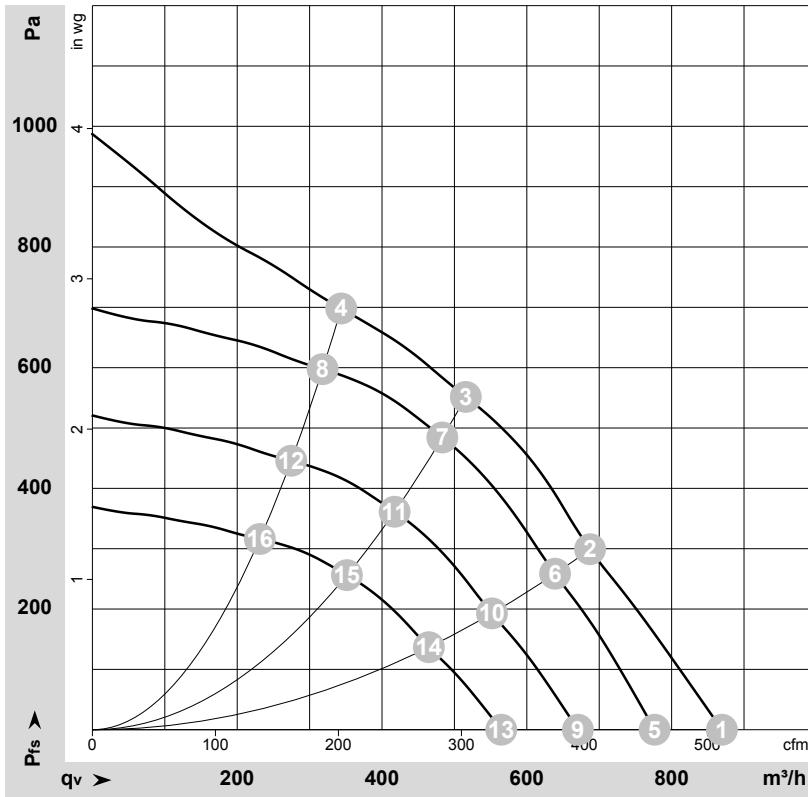

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-160714-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	q _v	p _{fs}	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m³/h	Pa	cfm	in. wg
1	230	50	4925	139	1.14	73	81	870	0	510	0.00
2	230	50	4730	158	1.28	68	76	685	300	405	1.20
3	230	50	4720	166	1.40	66	75	515	550	305	2.21
4	230	50	4755	155	1.25	70	78	345	700	200	2.81
5	230	50	4400	99	0.81	70	78	775	0	455	0.00
6	230	50	4400	127	1.03	66	74	640	257	375	1.03
7	230	50	4400	132	1.07	65	73	485	484	285	1.94
8	230	50	4400	123	0.99	68	76	320	598	185	2.40
9	230	50	3800	64	0.52	67	74	670	0	395	0.00
10	230	50	3800	82	0.66	63	70	550	192	325	0.77
11	230	50	3800	85	0.69	61	69	415	361	245	1.45
12	230	50	3800	79	0.64	65	72	275	446	160	1.79
13	230	50	3200	38	0.31	62	70	565	0	335	0.00
14	230	50	3200	49	0.40	58	66	465	136	275	0.55
15	230	50	3200	51	0.41	57	65	350	256	205	1.03
16	230	50	3200	47	0.38	60	68	230	316	135	1.27

U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
q_v = Air flow · p_{fs} = Pressure increase

