

R3G250-AD56-10

# EC centrifugal fan

backward curved, single inlet  
for railway applications



R3G250-AD56-10 ebmpapst Datasheet  
sales@fansco.com  
www.fansco.com

Limited partnership · Headquarters Muldingen  
County court Stuttgart · HRA 590344

General partner Elektrobau Muldingen GmbH · Headquarters Muldingen  
County court Stuttgart · HRB 590142

## Nominal data

Type	R3G250-AD56-10	
Motor	M3G084-CA	
Phase		DC
Nominal voltage	VDC	110
Nominal voltage range	VDC	93 .. 127
Type of data definition		fa
External electronics		CEG485HB5001
Speed (rpm)	min <sup>-1</sup>	2800
Power input	W	170
Current draw	A	1.5
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	50

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit  
Subject to alterations



# EC centrifugal fan

backward curved, single inlet  
for railway applications

## Technical features


Mass	2.88 kg
Size	250 mm
Surface of rotor	Coated in black
Material of impeller	Sheet steel, hot-galvanised
Number of blades	11
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 42
Insulation class	"B"
Max. permissible ambient motor temp. (transp./ storage)	+80 °C
Min. permissible ambient motor temp. (transp./storage)	-40 °C
Mounting position	Shaft horizontal or rotor on top; rotor on bottom on request
Condensate discharge holes	None
Operation mode	S1
Motor bearing	Ball bearing
Motor protection	PTC resistor
Cable exit	Lateral
Protection class	I (if protective earth is connected by customer)
Approval	CCC



# EC centrifugal fan

backward curved, single inlet  
for railway applications

## Product drawing

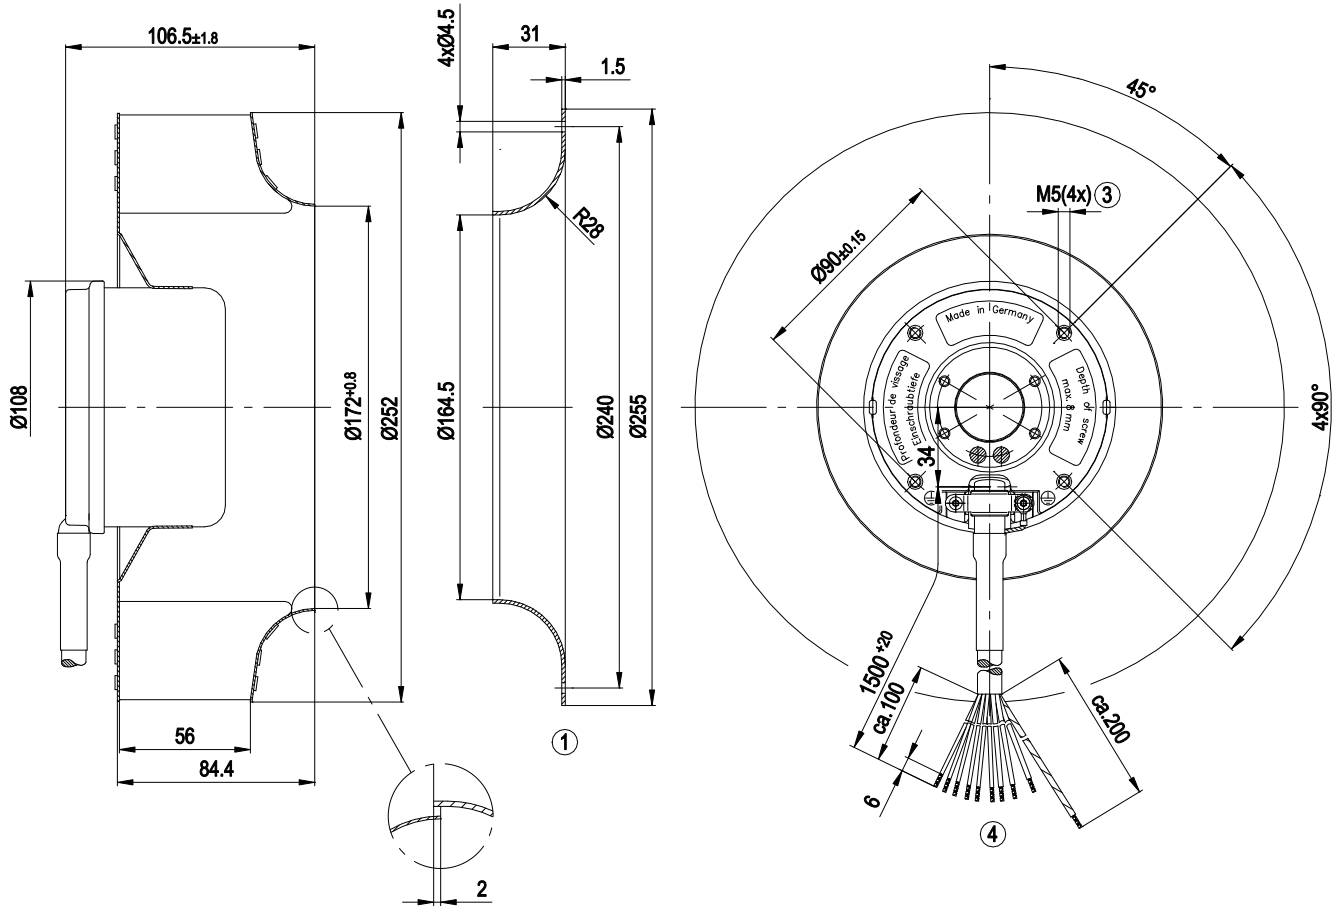


1	Accessory part: inlet nozzle 96359-2-4013 not included in the standard scope of delivery; other inlet nozzles on request
2	Accessory part: External electronics CEG485-HB50-01 not included in the standard scope of delivery
3	Depth of screw max. 8 mm
4	Connection line 6 x 0.5 mm <sup>2</sup> , 4 x 1.0 mm <sup>2</sup> , brass lead tips crimped



# EC centrifugal fan

backward curved, single inlet  
for railway applications

## Connection screen

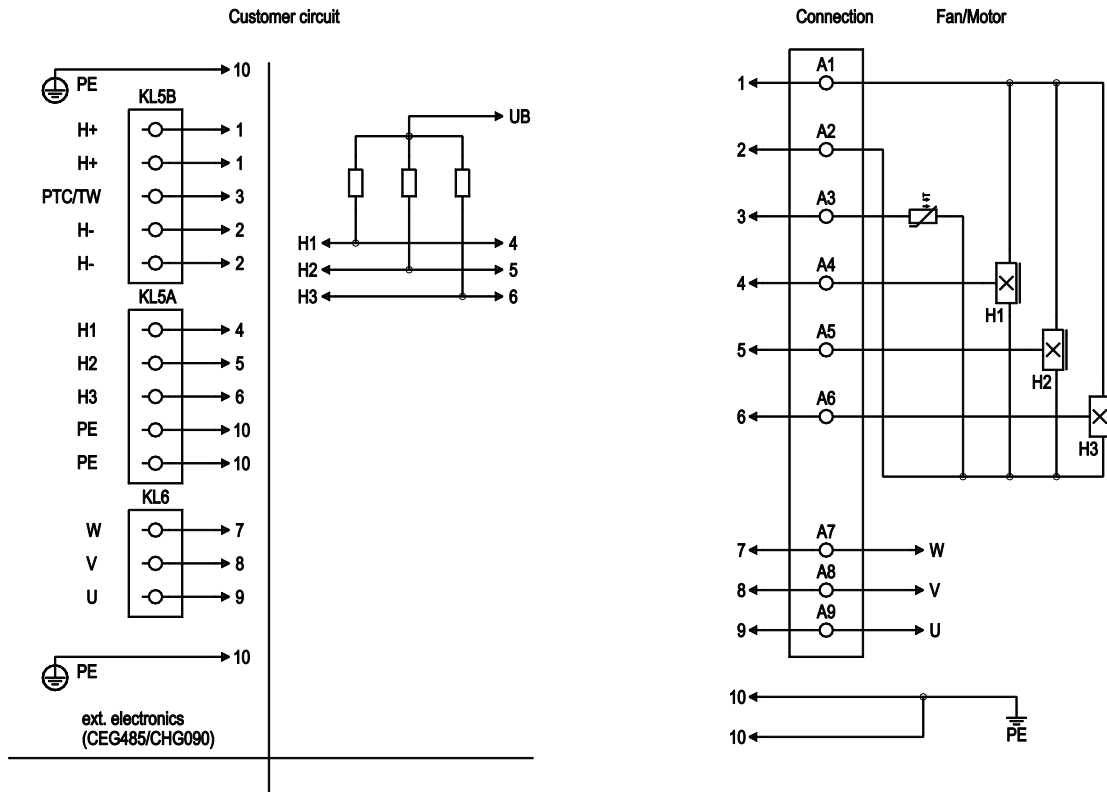

No.	Conn.	Designation	Function / assignment
KL5A	4	A4	Hall 1 (grey) open collector, R according to UB 4.5-24 V
KL5A	5	A5	Hall 2 (white) open collector, R according to UB 4.5-24 V
KL5A	6	A6	Hall 3 (black) open collector, R according to UB 4.5-24 V
KL5B	1	A1	+ (brown)
KL5B	2	A2	- (blue)
KL5B	3	A3	PTC (yellow)
KL6	7	A7	W (brown/white)
KL6	8	A8	V (black/white)
KL6	9	A9	U (red/white)
-	10	-	PE (green/yellow) - 2x




# EC centrifugal fan

backward curved, single inlet

for railway applications

## Charts: Air flow

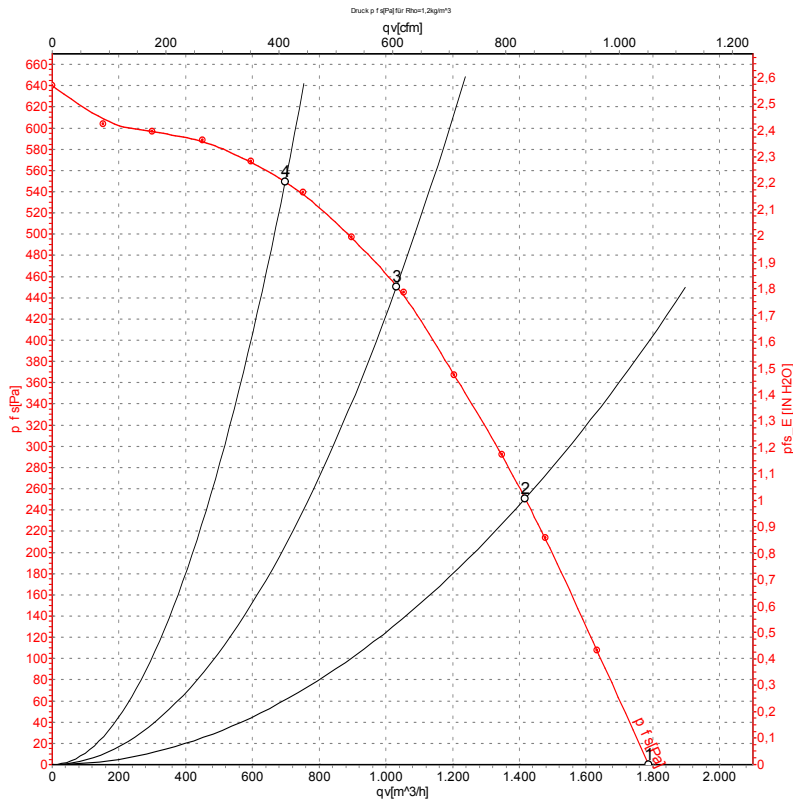

Measurement: LU-124786-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebmpapst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

	U	n	P <sub>ed</sub>	I	q <sub>v</sub>	p <sub>fs</sub>	q <sub>v</sub>	p <sub>fs</sub>
	V	min <sup>-1</sup>	W	A	m <sup>3</sup> /h	Pa	cfm	inH <sub>2</sub> O
1	110	2800	170	1.50	1785	0	1050	0.00
2	110	2810	228	2.08	1415	250	835	1.00
3	110	2805	259	2.36	1030	450	605	1.81
4	110	2810	232	2.11	700	550	410	2.21

U = Supply voltage · n = Speed (rpm) · P<sub>ed</sub> = Power input · I = Current draw · q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase

