

R3G280-RNB4-10

EC centrifugal fan - RadiCal

backward-curved, single-intake



R3G280-RNB4-10 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Limited partnership · Headquarters Muldingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Muldingen GmbH · Headquarters Muldingen

Amtsgericht (court of registration) Stuttgart · HRB 590142



Nominal data

Type	R3G280-RNB4-10	
Motor	M3G074-CF	
Nominal voltage	VDC	48
Nominal voltage range	VDC	36 .. 57
Method of obtaining data		fa
Speed (rpm)	min ⁻¹	1900
Power consumption	W	140
Current draw	A	3.0
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to ErP Directive

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	66.2	43.1	09 Power consumption P_e	kW	0.16
02 Measurement category		A		09 Air flow q_v	m ³ /h	1205
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	292
04 Efficiency grade N		85.1	62	10 Speed (rpm) n	min ⁻¹	1820
05 Variable speed drive		Yes		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$


LU-141163



Technical description


Weight	2.4 kg
Fan size	280 mm
Rotor surface	Painted black
Impeller material	PP plastic
Number of blades	6
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP44; installation- and position-dependent
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	F3-1
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Any
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Technical features	<ul style="list-style-type: none"> - Tach output - Motor current limitation - Soft start - Control input 0-10 VDC / PWM - Line undervoltage detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC interference emission	According to EN 55022 (Class B, household environment)
Motor protection	Reverse polarity and locked-rotor protection
With cable	Variable
Conformity with standards	EN 60950-1

Product drawing

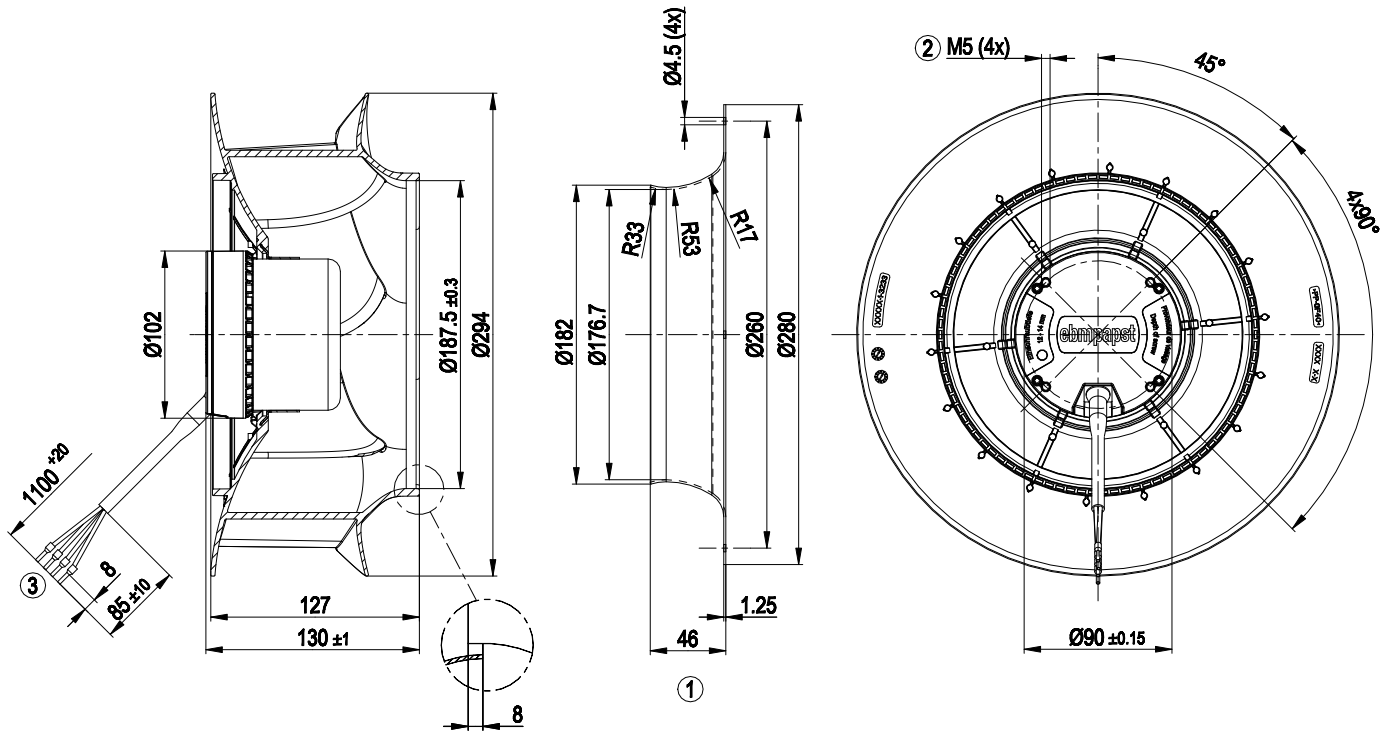


1	Accessory part: inlet ring 28000-2-4013 not included in scope of delivery
2	Max. clearance for screw 14 mm
3	Cable PVC AWG 16, 4x crimped ferrules

Connection diagram

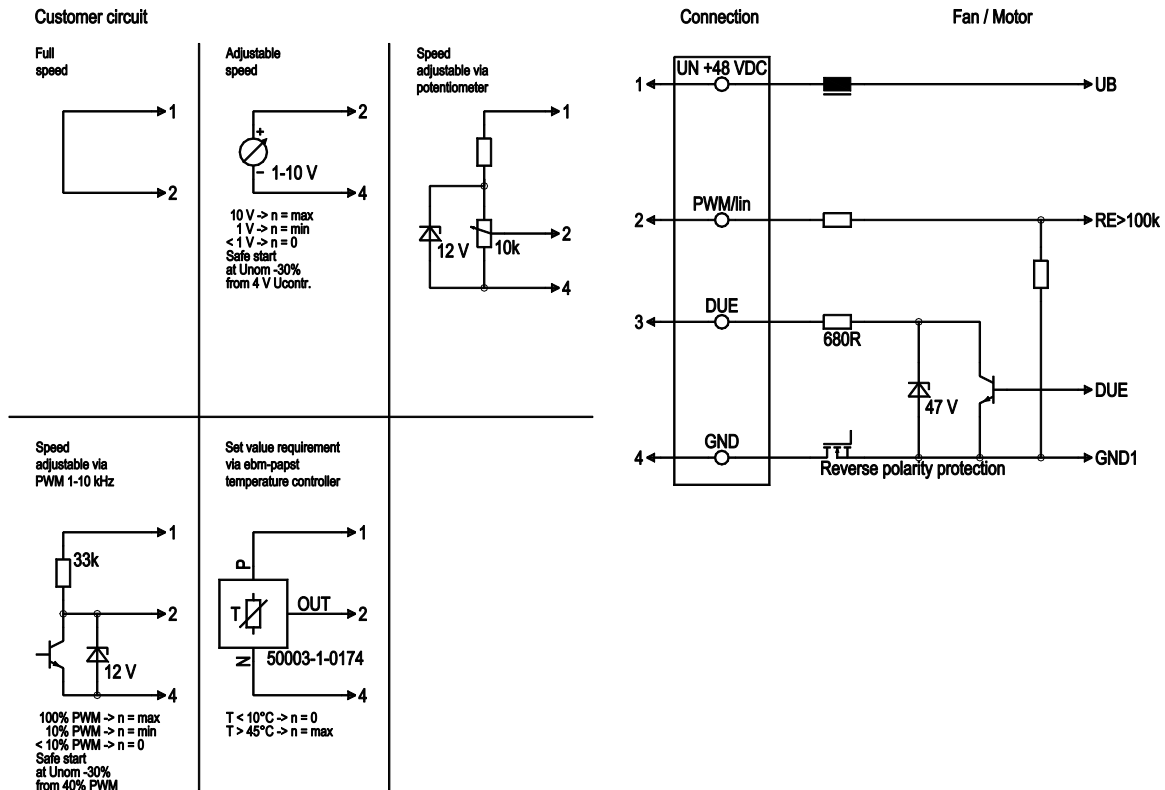

No.	Conn.	Designation	Color	Function/assignment
	1	Un +48 VDC	red	Power supply 48 VDC, maximum ripple 3.5%
	2	0-10 VDC	yellow	Control input Re > 100 K
	3	Tach	white	Tach output, 3 pulses per revolution, Isink max = 10 mA
	4	GND	blue	Reference ground

Curves: Air performance

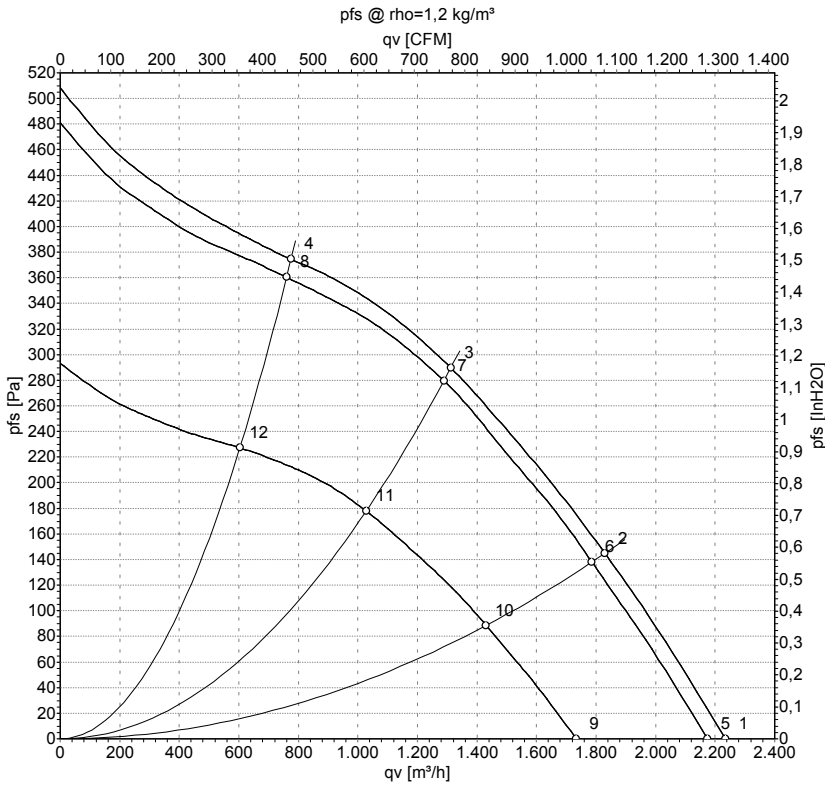

Measurement: LU-141165-1
 Measurement: LU-141163-1
 Measurement: LU-141166-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	n	P _{ed}	I	LpA _{in}	LwA _{in}	qv	P _{fs}	qv	P _{fs}
	V	min ⁻¹	W	A	dB(A)	dB(A)	m ³ /h	Pa	CFM	inH2O
1	57	1940	154	2.71			2235	0	1315	0.00
2	57	1875	177	3.11			1830	145	1075	0.58
3	57	1860	182	3.19			1310	290	770	1.16
4	57	1910	165	2.90			775	374	455	1.50
5	48	1900	140	3.00	66	74	2175	0	1280	0.00
6	48	1830	163	3.39	62	68	1785	140	1050	0.56
7	48	1820	168	3.51	60	65	1290	280	760	1.12
8	48	1865	154	3.20	62	70	760	360	445	1.45
9	36	1515	75	2.08			1735	0	1020	0.00
10	36	1475	86	2.39			1430	89	840	0.36
11	36	1465	89	2.46			1030	178	605	0.71
12	36	1495	81	2.24			605	228	355	0.92

U = Power supply · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side · qv = Air flow
 p_{fs} = Pressure increase

