



R3G310-AL28-61 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

## Nominal data

Type	R3G310-AL28-61	
Motor	M3G084-FA	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 277
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min <sup>-1</sup>	2110
Power consumption	W	430
Current draw	A	1.9
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	35

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change

## Data according to Commission Regulation (EU) 327/2011 (EN 17166)

		Actual	Req. 2015			
01 Overall efficiency $\eta_{es}$	%	58.3	47.4	09 Power consumption $P_{ed}$	kW	0.4
02 Measurement category		A		09 Air flow $q_v$	m <sup>3</sup> /h	2005
03 Efficiency category		Static		09 Pressure increase $p_{fs}$	Pa	384
04 Efficiency grade N		72.9	62	10 Speed (rpm) n	min <sup>-1</sup>	2105
05 Variable speed drive		Yes		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.

The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$ 


LU-122060



## Technical description

Weight	5 kg
Size	310 mm
Motor size	84
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum
Impeller material	Sheet aluminum
Number of blades	6
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP20
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H0 - dry environment
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on top; rotor on bottom on request
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Technical features	<ul style="list-style-type: none"> <li>- Operation and alarm display: reversible voltage output 0 V / +15 V</li> <li>- Integrated PID controller</li> <li>- Motor current limitation</li> <li>- PFC, active</li> <li>- RS-485 ebmBUS</li> <li>- Soft start</li> <li>- Control interface with SELV potential safely disconnected from the mains</li> <li>- Thermal overload protection for electronics/motor</li> <li>- Line undervoltage / phase failure detection</li> </ul>
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-4 (industrial environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Plug
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 61800-5-1; CE
Approval	EAC; UL 507; CSA C22.2 No. 113

Product drawing

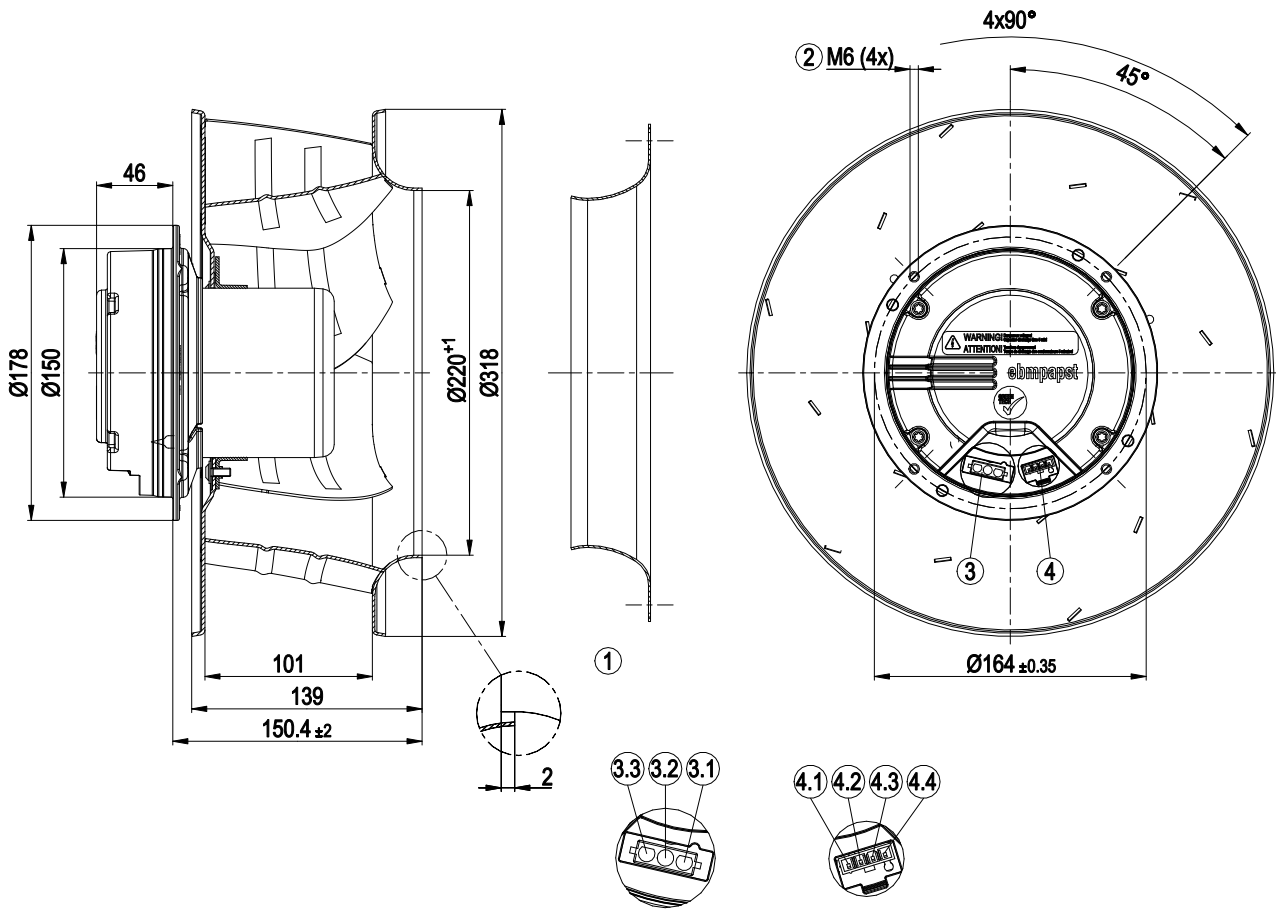


1	Accessory part: inlet ring 31050-2-4013 not included in scope of delivery
2	Max. clearance for screw 10 mm
3	3-pole header Lonco C63502-3A, mating connector with sockets not included in scope of delivery
3.1	L
3.2	N
3.3	PE
4	4-pole header Molex 39-30-2040, mating connector with sockets not included in scope of delivery
4.1	RSB
4.2	RSA
4.3	+15 V; in case of fault: 0 V
4.4	0 V; in case of fault: +15 V



# EC centrifugal fan

backward-curved, single-intake

## Accessory part

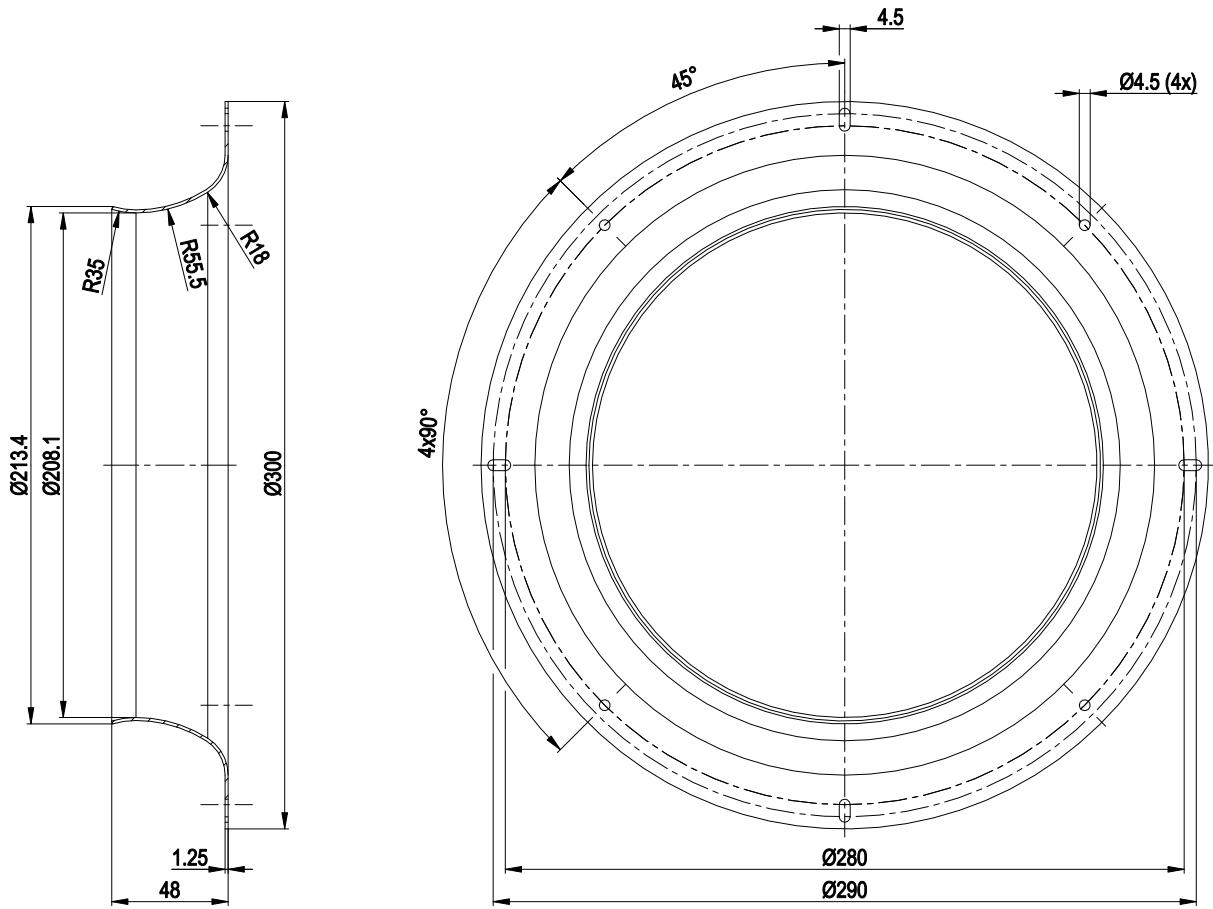


inlet ring 31050-2-4013 not included in scope of delivery



# EC centrifugal fan

backward-curved, single-intake


## Connection diagram

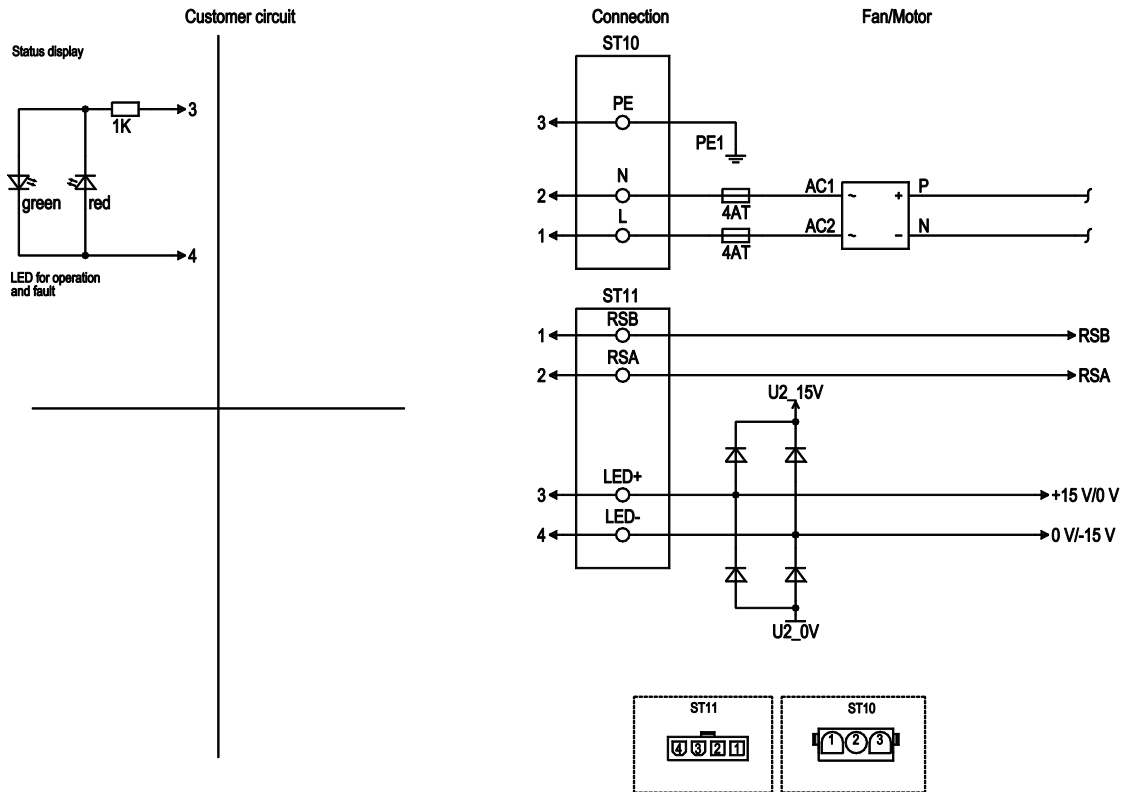

No.	Conn.	Designation	Color	Function/assignment
10	1	L		Power supply, phase, 50/60 Hz
10	2	N		Power supply, neutral conductor, 50/60 Hz
10	3	PE		Protective earth
11	1	RSB		RS-485 interface for ebmBus, RSB; SELV
11	2	RSA		RS-485 interface for ebmBus, RSA; SELV
11	3	LED +		Voltage output 15 V (+15%/-10%), max. 30 mA, power supply for external devices (e.g. status display for LED), SELV
11	4	LED -		Reference ground for control interface, SELV



## Curves: Air performance 50 Hz

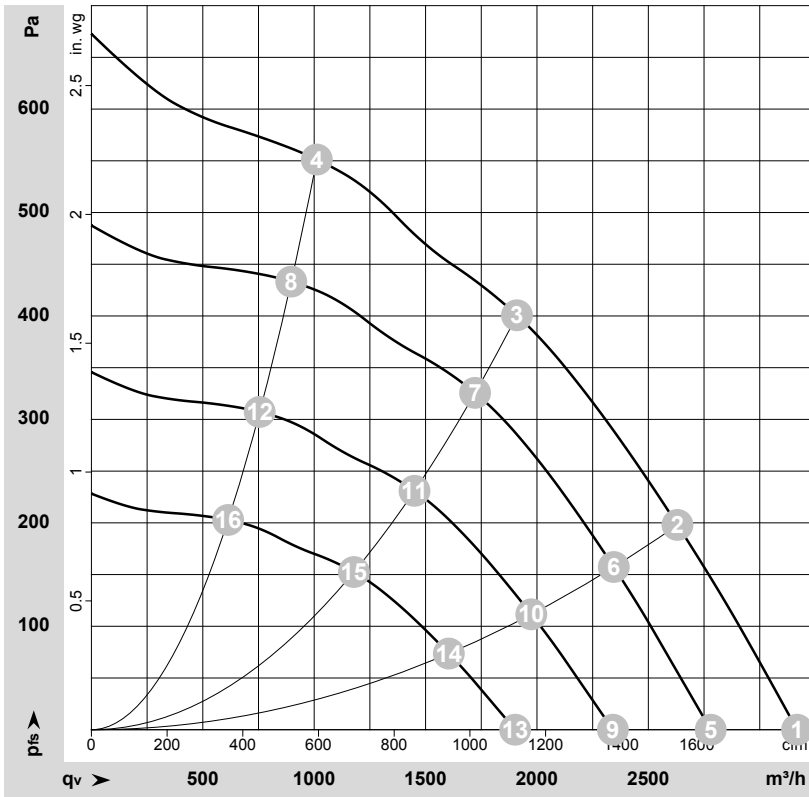

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-122060-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

	Wired	U	f	n	P <sub>ed</sub>	I	q <sub>v</sub>	P <sub>fs</sub>	q <sub>v</sub>	P <sub>fs</sub>
		V	Hz	min <sup>-1</sup>	W	A	m <sup>3</sup> /h	Pa	cfm	in. wg
1	1~	230	50	2165	302	1.32	3170	0	1865	0.00
2	1~	230	50	2130	359	1.57	2630	200	1550	0.80
3	1~	230	50	2110	430	1.90	1910	400	1125	1.61
4	1~	230	50	2145	356	1.57	1010	550	595	2.21
5	1~	230	50	1900	204	0.89	2780	0	1635	0.00
6	1~	230	50	1900	254	1.11	2345	157	1380	0.63
7	1~	230	50	1900	299	1.31	1720	326	1015	1.31
8	1~	230	50	1900	248	1.09	895	434	530	1.74
9	1~	230	50	1600	122	0.53	2340	0	1380	0.00
10	1~	230	50	1600	152	0.66	1975	112	1160	0.45
11	1~	230	50	1600	178	0.78	1450	231	855	0.93
12	1~	230	50	1600	148	0.65	755	308	445	1.24
13	1~	230	50	1300	65	0.28	1900	0	1120	0.00
14	1~	230	50	1300	82	0.36	1605	74	945	0.30
15	1~	230	50	1300	96	0.42	1180	153	695	0.61
16	1~	230	50	1300	80	0.35	615	203	360	0.81

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power consumption · I = Current draw · q<sub>v</sub> = Air flow · p<sub>s</sub> = Pressure increase

