

R3G355-RR13-P1

EC centrifugal fan - RadiCal

backward curved, single inlet

for railway applications



R3G355-RR13-P1 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen
County court Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
County court Stuttgart · HRB 590142

Nominal data

Type	R3G355-RR13-P1	
Motor	M3G084-DF	
Nominal voltage	VDC	110
Nominal voltage range	VDC	77 .. 138
Type of data definition		ml
State		prelim.
Speed (rpm)	min ⁻¹	1660
Power input	W	390
Current draw	A	3.5
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations

Data according to ErP directive

		Actual	Request 2015			
01 Overall efficiency η_{es}	%	64.3	47.2	09 Power input P_e	kW	0.39
02 Measurement category		A		09 Air flow q_v	m ³ /h	2400
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	337
04 Efficiency grade N		79.1	62	10 Speed (rpm) n	min ⁻¹	1660
05 Variable speed drive		Yes		11 Specific ratio*		1.00

Data definition with optimum efficiency.
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-165938



Technical features


Mass	5.2 kg
Size	355 mm
Surface of rotor	Coated in black
Material of electronics housing	Die-cast aluminium
Material of impeller	PA plastic
Number of blades	6
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"F"
Humidity (F)/environmental protection class (H)	F3-1
Max. permissible ambient motor temp. (transp./ storage)	+80 °C
Min. permissible ambient motor temp. (transp./storage)	-40 °C
Mounting position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensate discharge holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing; (sealed)
Technical features	<ul style="list-style-type: none"> - Output 10 VDC, max. 10 mA - Operation and alarm display - Alarm relay - Integrated PID controller - Run monitoring - Output limit - Motor current limit - RS485 MODBUS RTU - Soft start -Maximum EEPROM write cycles 100,000 - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Overvoltage detection - Over-temperature protected electronics / motor - Line undervoltage detection
EMC directives	According to EN 50121-3-2
Motor protection	Thermal overload protector (TOP) wired internally
Cable exit	Variable
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 15085-1, CPC3: 2007; EN 4545-2, HL3: 2013; EN 50155: 2008; EN 61373, Cat. 1B: 2010
Approval	EAC
Remark	<p>If voltage (e.g. 230 VAC) is passed through the alarm relay, the SELV signal wires lose their property of reinforced insulation, meaning they only have basic insulation</p> <p>The SELV property (reinforced insulation) is not lost when voltages of up to 110 VDC are passed through the alarm relay; EMC regulation: EN 50121-3-2 in preparation</p>

EC centrifugal fan - RadiCal

backward curved, single inlet

for railway applications

Product drawing

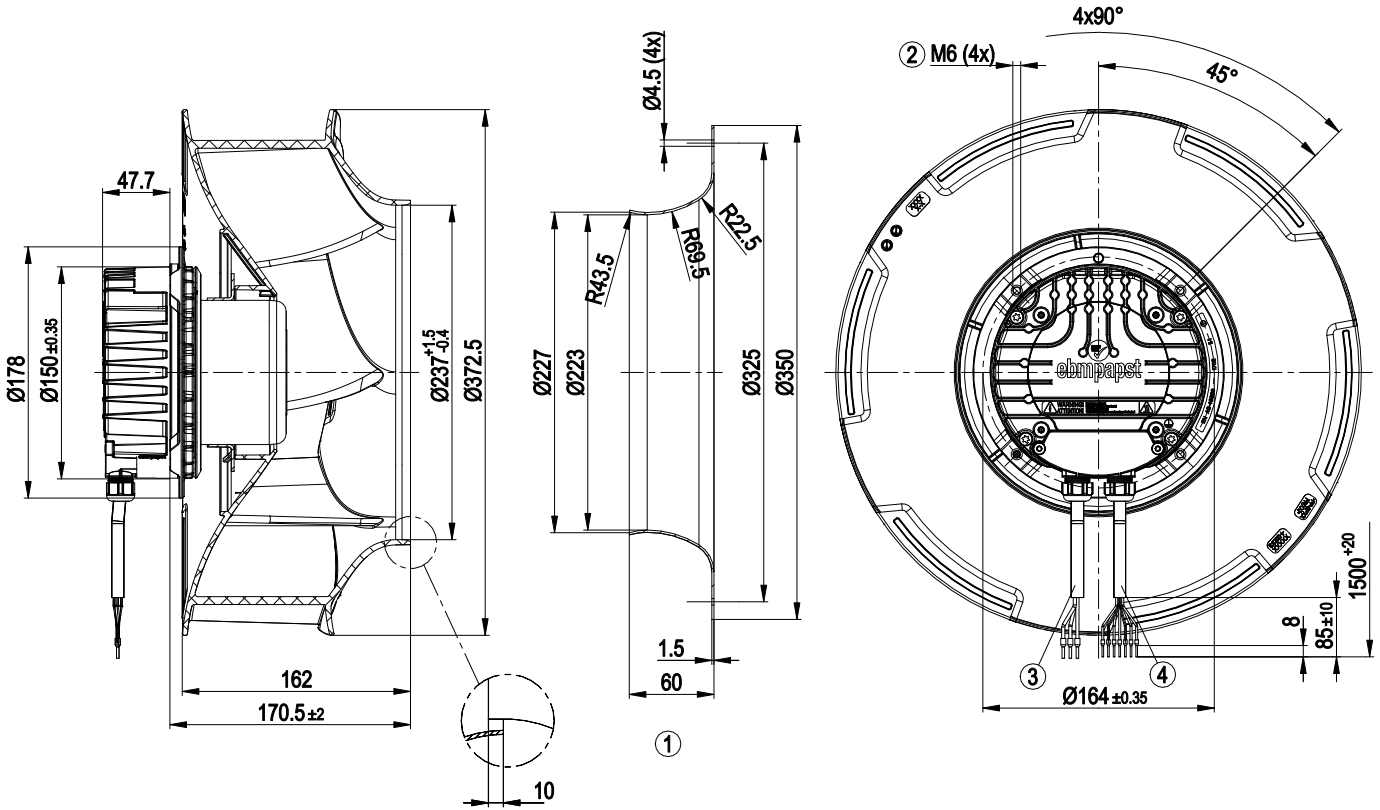


1	Accessory part: Inlet nozzle 35500-2-4013 not included in scope of delivery
2	Thread reach max. 16 mm
3	Connection line halogen-free, BETrans® 3 GWK flex, 4G 1.5 mm ² , 3x crimped core-end sleeves, 1 wire not brought out
4	Connection line halogen-free, BETrans® 3 GWK flex, 7x0.5 mm ² , 7x crimped core-end sleeves



EC centrifugal fan - RadiCal

backward curved, single inlet
for railway applications

Connection screen

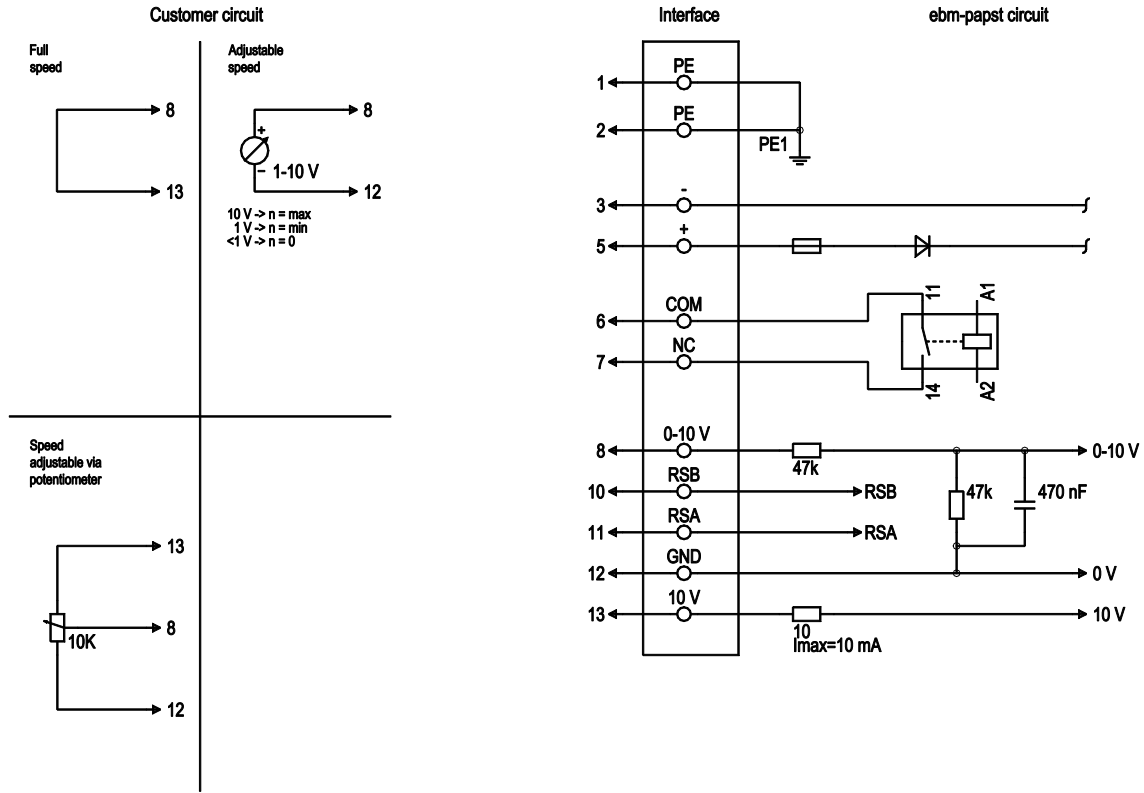


No.	Conn.	Designation	Colour	Function / assignment
1	1, 2	PE	green/yellow	Protective earth
1	3	-	black	Power supply, GND, see type plate for voltage range
1	5	+	brown	Power supply, see type plate for voltage range
2	6	COM	grey	Status relay, floating status contact, break for failure, Contact rating 250 VAC / max. 2 A (AC1) / min. 1 mA / 5 V, basic insulation on mains side and on control interface
2	7	NC	orange	Status relay, floating status contact, common connection, Contact rating 250 VAC / max. 2 A (AC1) / min. 1 mA / 5 V, basic insulation on mains side and on control interface
2	8	0-10 V	yellow	Analogue input 1, set value: 0-10 V, Ri= 100 kΩ, parametrisable curve; SELV
2	10	RSB	brown	RS-485 interface for MODBUS, RSB; SELV
2	11	RSA	white	RS-485 interface for MODBUS, RSA; SELV
2	12	GND	blue	Reference earth for control interface; SELV
2	13	+10 V	red	Fixed voltage output 10 VDC, +10 V ±3%, max. 10 mA, short-circuit-proof, power supply for external devices (e.g. potentiometers); SELV



EC centrifugal fan - RadiCal

backward curved, single inlet
for railway applications

Charts: Air flow

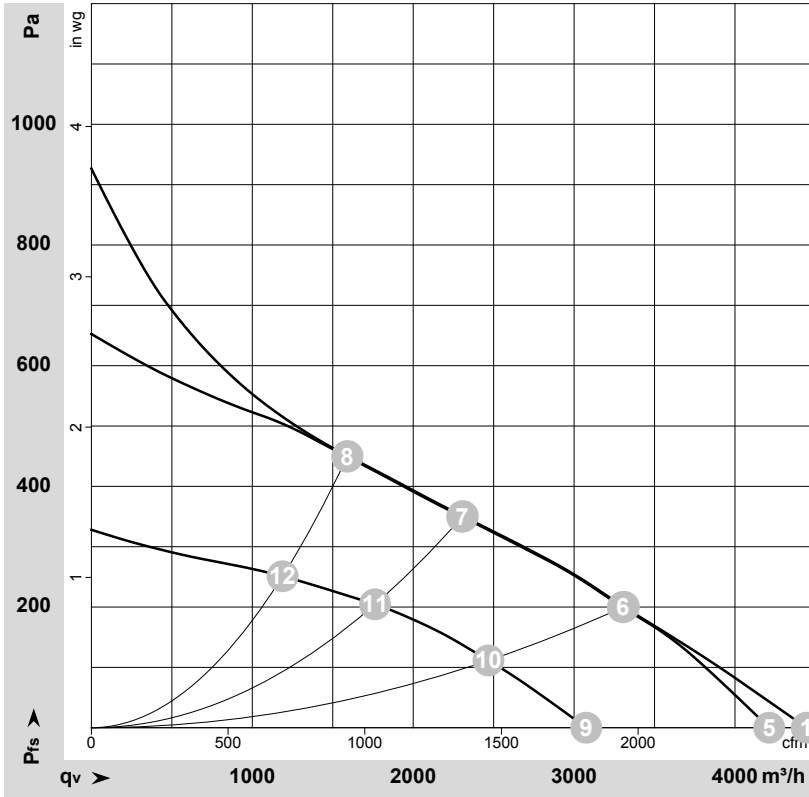

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-166321-1
Measurement: LU-165938-1
Measurement: LU-166317-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: L_{wA} measured as per ISO 13347 / L_{pA} measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	U	n	P _{ed}	I	L _{pA_{in}}	L _{wA_{in}}	q _v	P _{fs}	q _v	P _{fs}
	V	min ⁻¹	W	A	dB(A)	dB(A)	m ³ /h	Pa	cfm	inH2O
1	138	1925	390	2.86			4445	0	2615	0.00
2	138	1705	390	2.84			3310	200	1950	0.80
3	138	1660	390	2.85			2310	350	1360	1.41
4	138	1715	390	2.85			1590	450	935	1.81
5	110	1820	334	3.02	71	78	4215	0	2480	0.00
6	110	1705	390	3.50	64	71	3305	200	1945	0.80
7	110	1660	390	3.50	60	67	2305	350	1355	1.41
8	110	1715	388	3.50	63	71	1590	450	935	1.81
9	77	1330	135	1.75			3075	0	1810	0.00
10	77	1285	168	2.18			2470	111	1455	0.45
11	77	1275	177	2.30			1765	205	1040	0.82
12	77	1285	166	2.16			1190	251	700	1.01

U = Supply voltage · n = Speed (rpm) · P_{ed} = Power input · I = Current draw · L_{pA_{in}} = Sound pressure level inlet side · L_{wA_{in}} = Sound power level inlet side · q_v = Air flow · p_{fs} = Pressure increase

