

R3G400-AD20-30

EC centrifugal fan

backward-curved, single-intake



R3G400-AD20-30 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Type	R3G400-AD20-30	
Motor	M3G084-FA	
Nominal voltage	VDC	48
Nominal voltage range	VDC	36 .. 57
Method of obtaining data		fa
Speed (rpm)	min ⁻¹	1290
Power consumption	W	200
Current draw	A	4.2
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	62.9	44.8	09 Power consumption P_e	kW	0.23
02 Measurement category		A		09 Air flow q_v	m ³ /h	1680
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	275
04 Efficiency grade N		80.1	62	10 Speed (rpm) n	min ⁻¹	1260
05 Variable speed drive		Yes		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$


LU-56162



Technical description

Weight	4.9 kg
Fan size	400 mm
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum
Impeller material	Sheet aluminum
Number of blades	6
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP42
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Any
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Technical features	<ul style="list-style-type: none"> - Tach output - Motor current limitation - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from supply - Thermal overload protection for motor
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC interference emission	According to EN 55022 (Class B)
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Variable
Conformity with standards	EN 60950-1; CE
Approval	CSA C22.2 No. 100; EAC; CCC; UL 1004-1

Product drawing

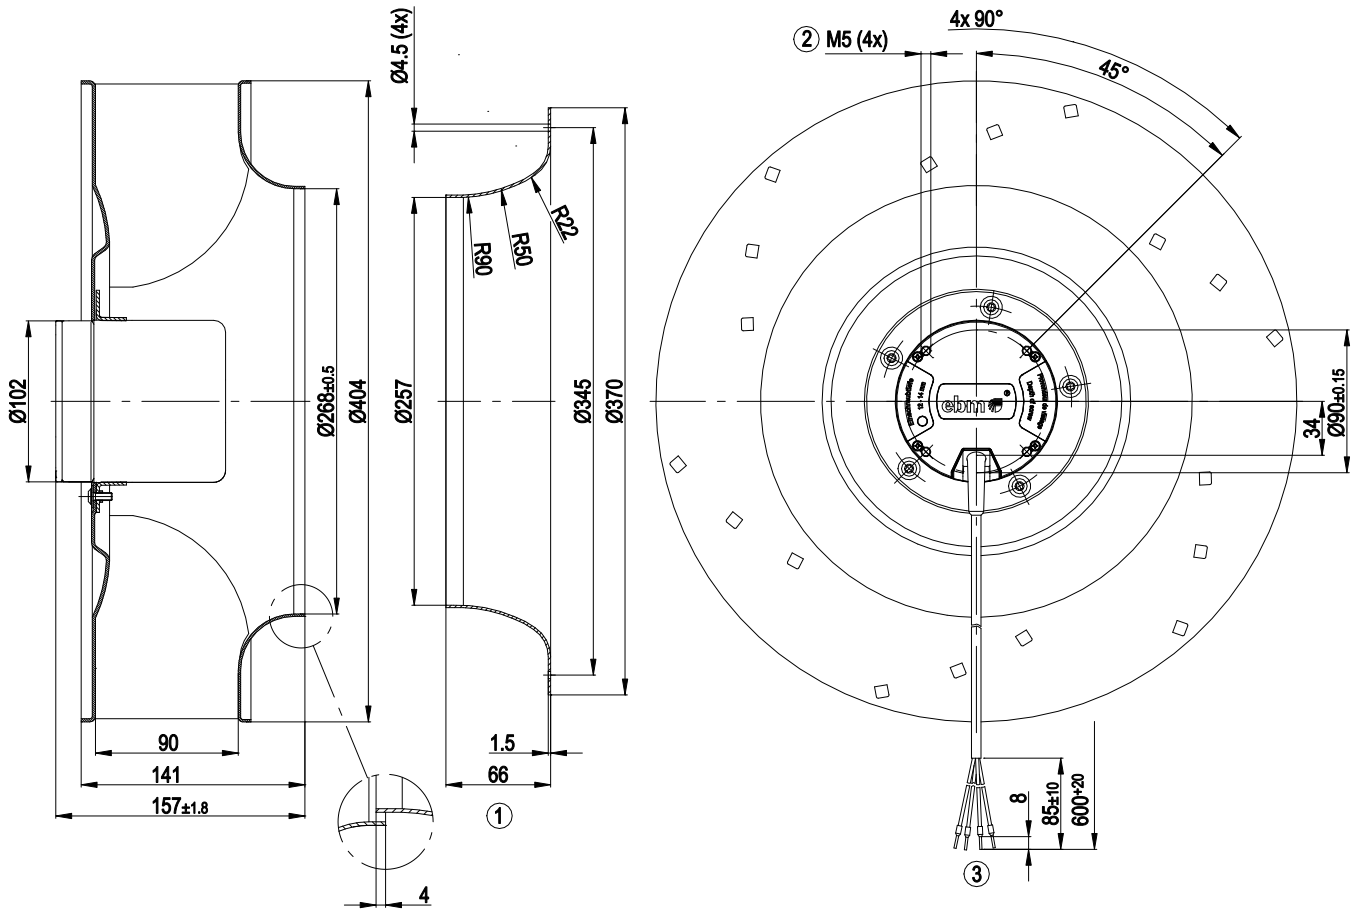


1	Accessory part: inlet ring 54476-2-4013 not included in scope of delivery
2	Max. clearance for screw 14 mm
3	Cable PVC AWG16, 4x crimped ferrules




Connection diagram

Customer circuit

Application notes for various control options

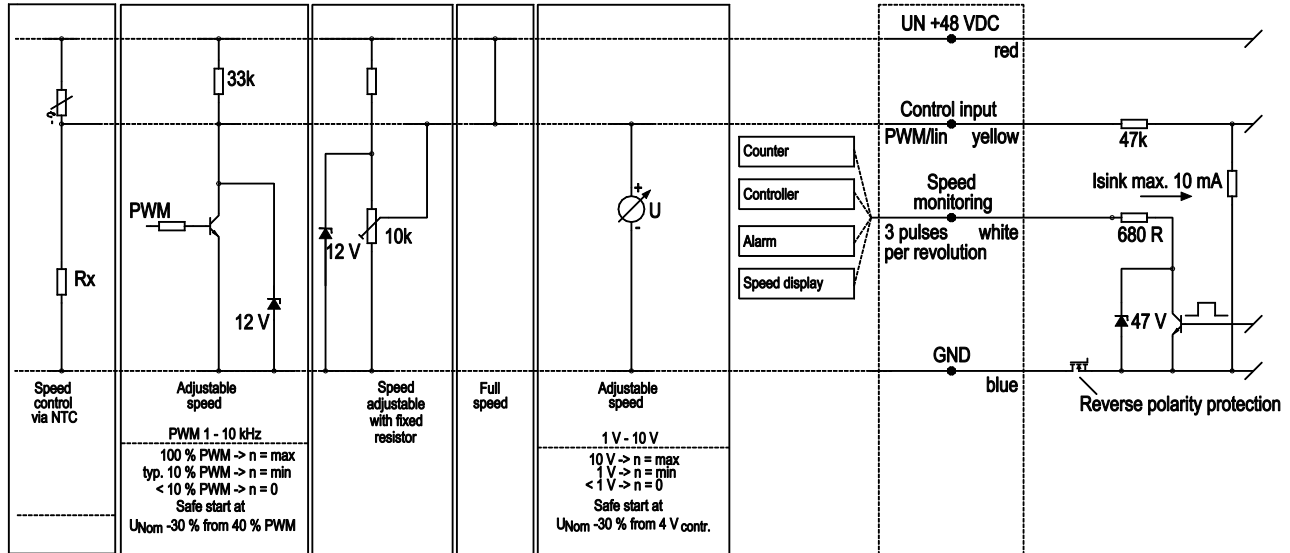

Curves: Air performance

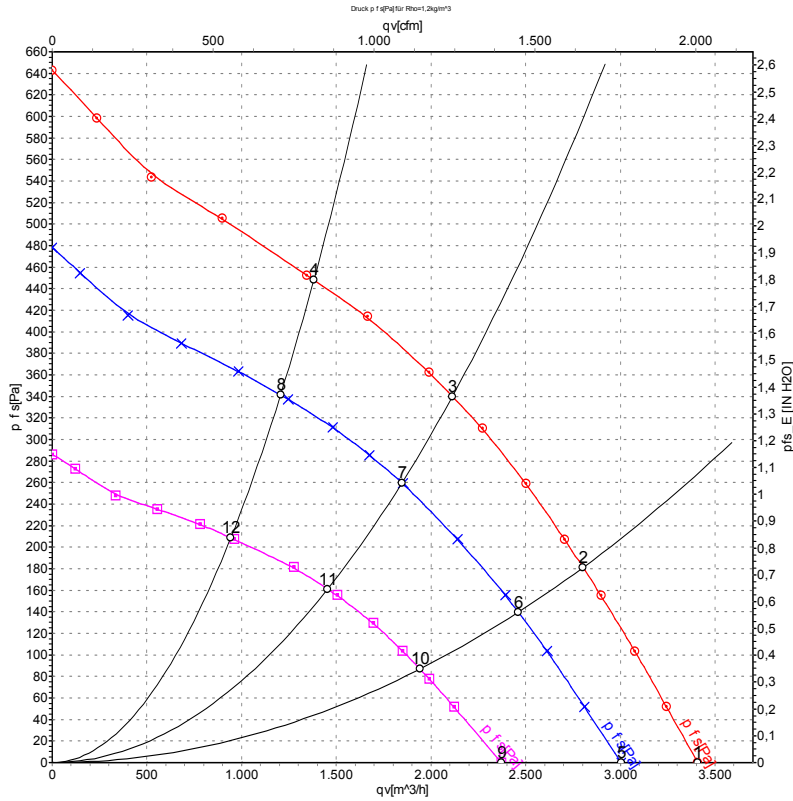

Measurement: LU-56160-1
 Measurement: LU-56162-1
 Measurement: LU-56166-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	n	P _{ed}	I	q _v	p _{fs}	q _v	p _{fs}
	V	min ⁻¹	W	A	m ³ /h	Pa	cfm	inH ₂ O
1	57	1480	307	5.44	3410	0	2005	0.00
2	57	1445	348	6.20	2800	180	1650	0.72
3	57	1440	353	6.28	2115	340	1245	1.36
4	57	1465	325	5.77	1380	452	815	1.81
5	48	1290	200	4.20	3005	0	1770	0.00
6	48	1260	229	4.82	2460	140	1450	0.56
7	48	1255	234	4.93	1845	260	1085	1.04
8	48	1280	214	4.50	1205	340	710	1.36
9	36	1010	96	2.70	2370	0	1395	0.00
10	36	995	111	3.11	1940	87	1145	0.35
11	36	990	114	3.20	1455	161	855	0.65
12	36	1005	105	2.94	945	209	555	0.84

U = Power supply · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase

