

R3G450-PA21-C1 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

| | | |
|--------------------------|-------------------|------------|
| Type | R3G450-PA21-C1 | |
| Motor | M3G150-IF | |
| Phase | | 3~ |
| Nominal voltage | VAC | 400 |
| Nominal voltage range | VAC | 380 .. 480 |
| Frequency | Hz | 50/60 |
| Method of obtaining data | | me |
| Status | | prelim. |
| Speed (rpm) | min ⁻¹ | 2200 |
| Power consumption | W | 3190 |
| Current draw | A | 4.6 |
| Min. ambient temperature | °C | -25 |
| Max. ambient temperature | °C | 40 |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011

| | | Actual | Req. 2015 | | | |
|-----------------------------------|---|--------|-----------|--------------------------------|-------------------|------|
| 01 Overall efficiency η_{es} | % | 68.1 | 56.8 | 09 Power consumption P_{ed} | kW | 3.18 |
| 02 Measurement category | | A | | 09 Air flow q_v | m ³ /h | 6760 |
| 03 Efficiency category | | Static | | 09 Pressure increase p_{fs} | Pa | 1105 |
| 04 Efficiency grade N | | 73.3 | 62 | 10 Speed (rpm) n | min ⁻¹ | 2205 |
| 05 Variable speed drive | | Yes | | 11 Specific ratio [*] | | 1.01 |

Data obtained at optimum efficiency level.

The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

^{*} Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$


LU-184645



Technical description

| | |
|--|--|
| Weight | 27.5 kg |
| Size | 450 mm |
| Motor size | 150 |
| Rotor surface | Painted black |
| Electronics housing material | Die-cast aluminum |
| Impeller material | Sheet aluminum |
| Number of blades | 5 |
| Direction of rotation | Clockwise, viewed toward rotor |
| Degree of protection | IP55 |
| Insulation class | "F" |
| Moisture (F) / Environmental (H) protection class | H1 |
| Max. permitted ambient temp. for motor (transport/storage) | +80 °C |
| Min. permitted ambient temp. for motor (transport/storage) | -40 °C |
| Installation position | Shaft horizontal or rotor on bottom; rotor on top on request |
| Condensation drainage holes | On rotor side |
| Mode | S1 |
| Motor mounting | Ball bearing |
| Technical features | <ul style="list-style-type: none"> - Output 10 VDC, max. 10 mA - Output 20 VDC, max. 50 mA - Output for slave 0-10 V - Operation and alarm display - Input for sensor 0-10 V or 4-20 mA - External 24 V input (parameter setting) - External release input - Integrated PI controller - Power limiter - Motor current limitation - PFC, active - RS-485 MODBUS-RTU - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection |
| Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system) | <= 3.5 mA |
| Electrical hookup | Terminal box |
| Motor protection | Reverse polarity and locked-rotor protection |
| Protection class | I (with customer connection of protective earth) |
| Conformity with standards | EN 61800-5-1; CE |
| Approval | EAC; CSA C22.2 No. 77 + CAN/CSA-E60730-1; UL 1004-7 + 60730 |


Product drawing

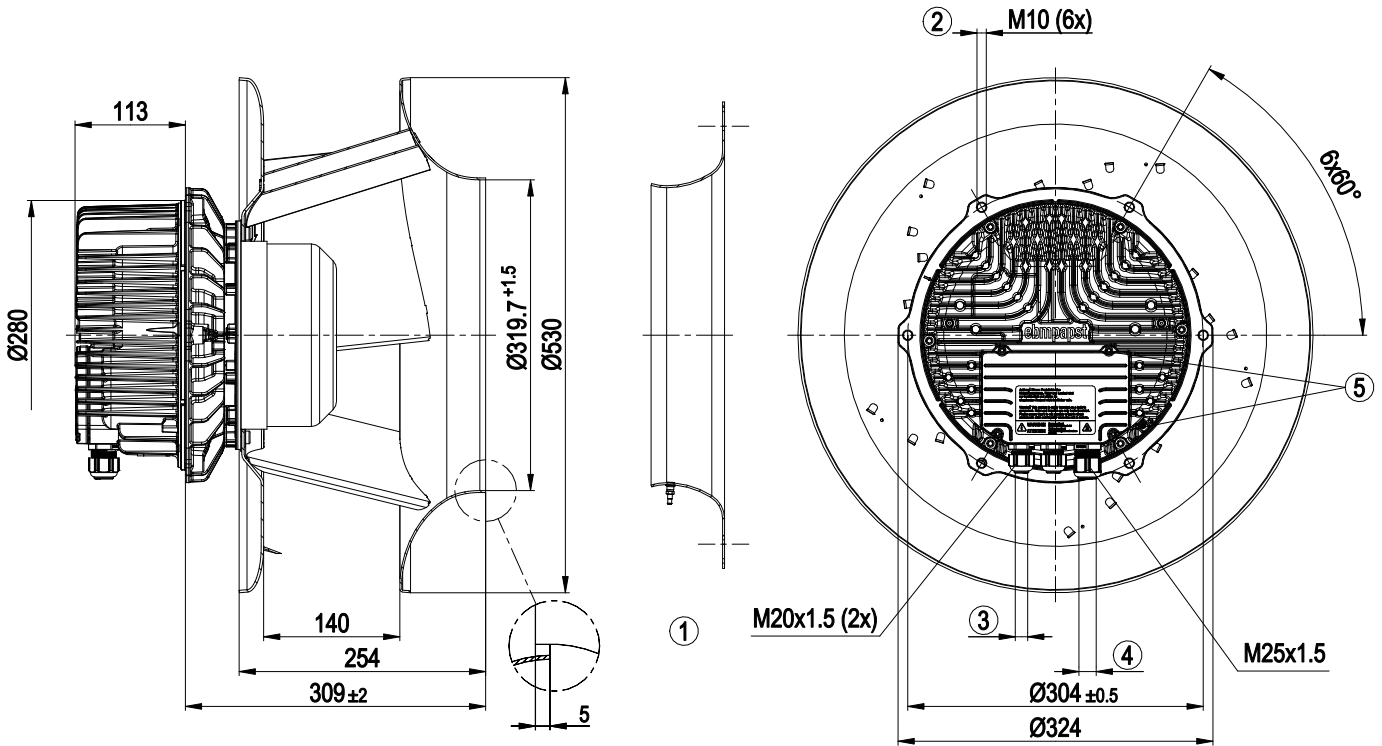

| | |
|---|---|
| 1 | Accessory part: Inlet ring 45075-2-4013 with pressure tap (k-factor: 240) not included in scope of delivery |
| 2 | Max. clearance for screw 20 mm |
| 3 | Cable diameter min. 4 mm, max. 10 mm, tightening torque 4 ± 0.6 Nm |
| 4 | Cable diameter min. 9 mm, max. 16 mm, tightening torque 6 ± 0.9 Nm |
| 5 | Tightening torque 3.5 ± 0.5 Nm |




Accessory part

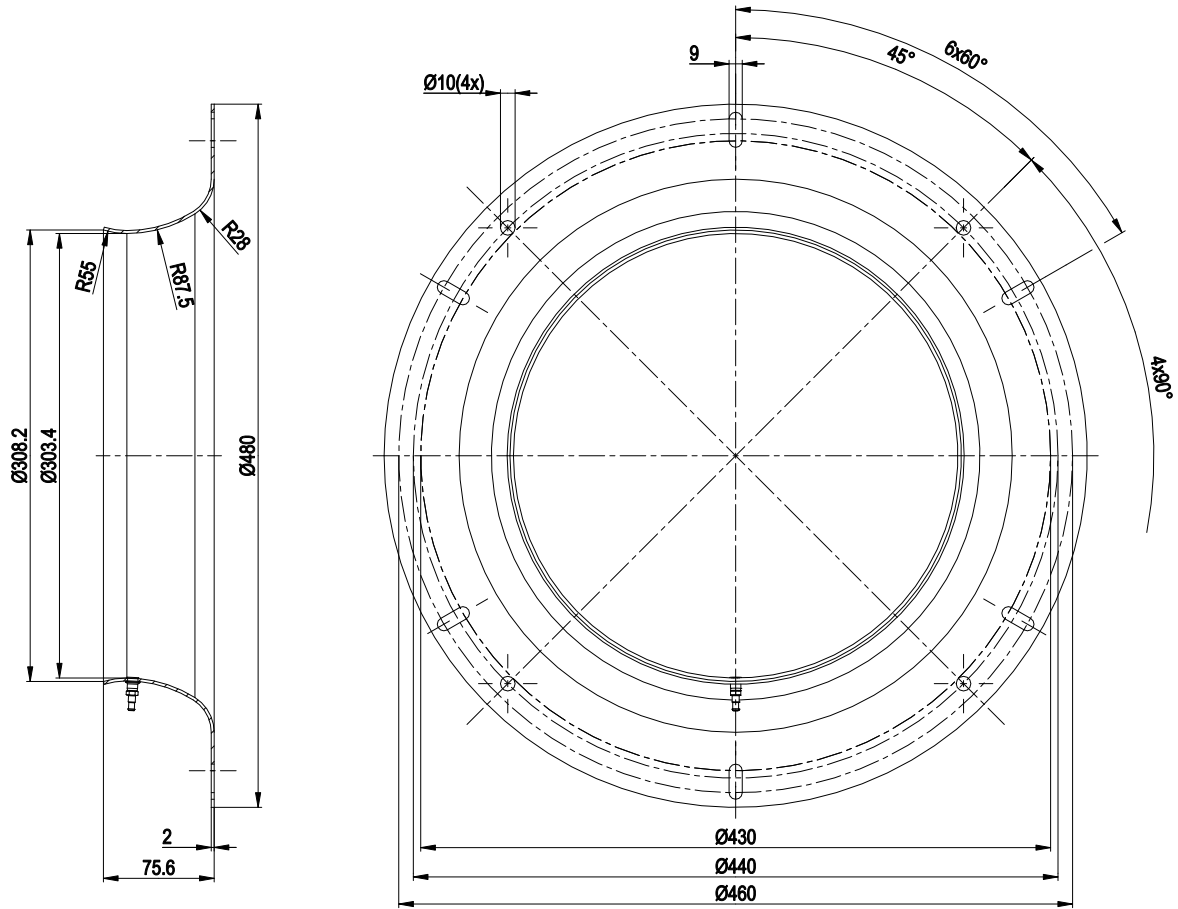

- inlet ring 45075-2-4013 with pressure tap (k-factor: 240) not included in scope of delivery



Connection diagram

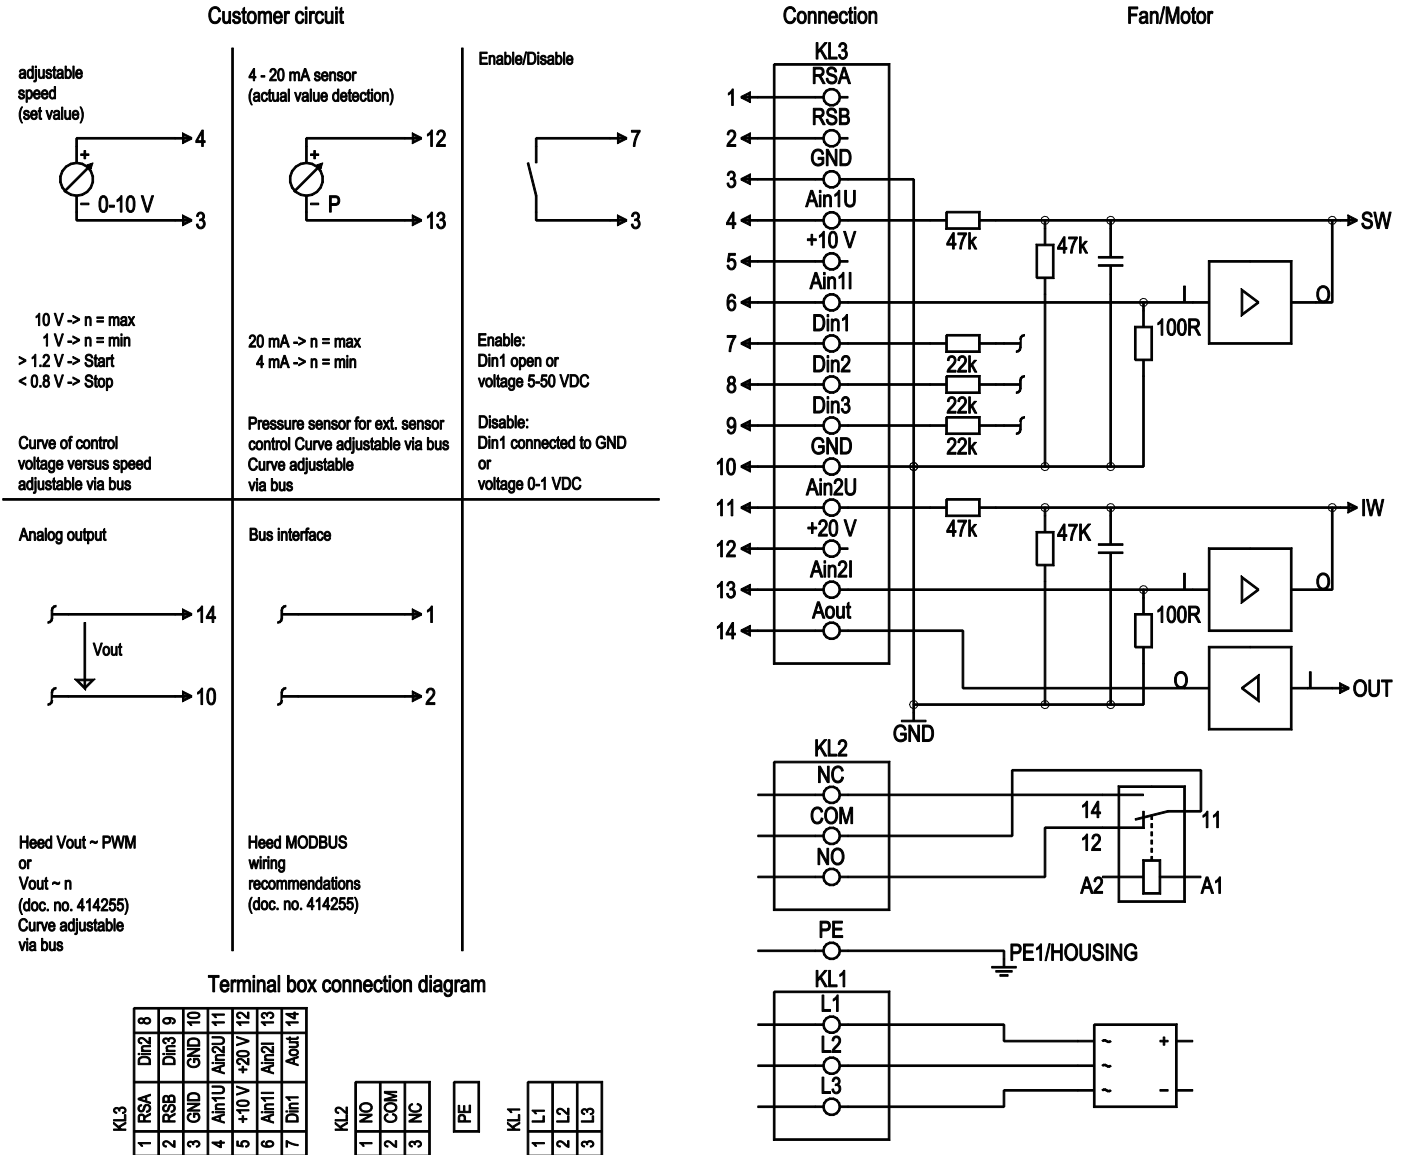


| No. | Conn. | Designation | Function/assignment |
|------|--------|-------------|---|
| KL 1 | 1 | L1 | Supply connection, power supply; for nominal voltage range see technical data |
| KL 1 | 2 | L2 | Supply connection, power supply; for nominal voltage range see technical data |
| KL 1 | 3 | L3 | Supply connection, power supply; for nominal voltage range see technical data |
| PE | PE | PE | Ground connection, PE connection |
| KL 2 | 1 | NO | Status relay, floating status contact, make for failure |
| KL2 | 2 | COM | Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on supply side and on control interface side |
| KL2 | 3 | NC | Status relay, floating status contact, break for failure |
| KL 3 | 1 | RSA | Bus connection RS485, RSA, MODBUS-RTU; SELV |
| KL 3 | 2 | RSB | Bus connection RS485, RSB, MODBUS-RTU; SELV |
| KL 3 | 3 / 10 | GND | Reference ground for control interface; SELV |
| KL 3 | 4 | Ain1 U | Analog input 1, set value: 0-10 V, Ri = 100 kΩ, adjustable curve, only usable as alternative to input Ain1 I; SELV |



| No. | Conn. | Designation | Function/assignment |
|------|-------|-------------|--|
| KL 3 | 5 | + 10 V | Fixed voltage output 10 VDC, + 10 V +/-3%, max. 10 mA, short-circuit-proof, power supply for ext. devices (e.g. potentiometers); SELV |
| KL 3 | 6 | Ain1 I | Analog input 1, set value: 4-20 mA, Ri = 100 Ω, adjustable curve, only usable as alternative to input Ain1 U; SELV |
| KL 3 | 7 | Din1 | Digital input 1: enable electronics, enable: pin open or applied voltage 5-50 VDC disable: bridge to GND or applied voltage < 1 VDC reset function: triggers software reset after a level change to < 1 VDC; SELV |
| KL 3 | 8 | Din2 | Digital input 2: Switching parameter sets 1/2, according to EEPROM setting, the valid or used parameter set can be selected via bus or via digital input DIN2. Parameter set 1: pin open or applied voltage 5-50 VDC Parameter set 2: bridge to GND or applied voltage < 1 VDC; SELV |
| KL 3 | 9 | Din3 | Digital input 3: according to EEPROM setting, the integrated controller's direction of action can be selected via bus or digital input Din3; normal: pin open or applied voltage 5-50 VDC inverse: bridge to GND or applied voltage < 1 VDC; SELV |
| KL 3 | 11 | Ain2 U | Analog input 2, measured value: 0-10 V, Ri = 100 kΩ, adjustable curve, only usable as alternative to input Ain2 I; SELV |
| KL 3 | 12 | + 20 V | Fixed voltage output 20 VDC, +20 V +/-25/-10%, max. 50 mA, short-circuit-proof, power supply for ext. devices (e.g. sensors); SELV Alternatively: +24 VDC input for parameterization without line voltage |
| KL 3 | 13 | Ain2 I | Analog input 2, measured value: 4-20 mA, Ri = 100 Ω, adjustable curve, only usable as alternative to input Ain2 U; SELV |
| KL 3 | 14 | Aout | Analog output 0-10 VDC, max. 5 mA, output of current motor modulation level / motor speed adjustable curve; SELV |

Curves: Air performance 50 Hz

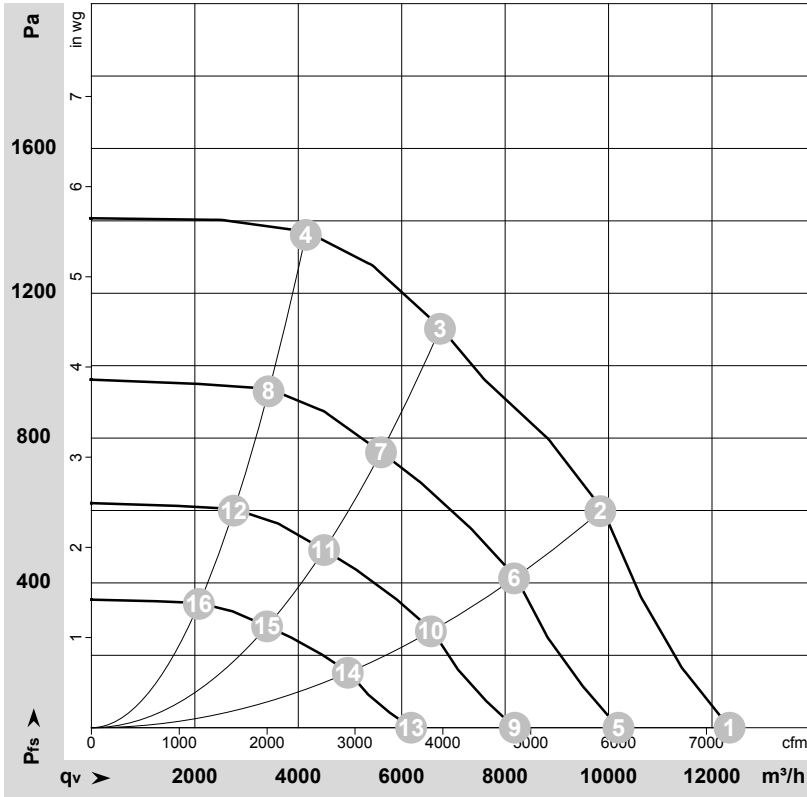

$\rho = 1.178 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-184645-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

| | U | f | n | P _{ed} | I | LpA _{in} | LwA _{in} | LwA _{out} | q _v | P _{fs} | q _v | P _{fs} |
|----|-----|----|-------------------|-----------------|------|-------------------|-------------------|--------------------|-------------------|-----------------|----------------|-----------------|
| | V | Hz | min ⁻¹ | W | A | dB(A) | dB(A) | dB(A) | m ³ /h | Pa | cfm | in. wg |
| 1 | 400 | 50 | 2200 | 1960 | 2.84 | 89 | 96 | 98 | 12340 | 0 | 7265 | 0.00 |
| 2 | 400 | 50 | 2200 | 2915 | 4.20 | 83 | 88 | 94 | 9840 | 611 | 5790 | 2.45 |
| 3 | 400 | 50 | 2200 | 3190 | 4.60 | 82 | 87 | 94 | 6750 | 1100 | 3975 | 4.42 |
| 4 | 400 | 50 | 2200 | 3000 | 4.33 | 84 | 90 | 96 | 4150 | 1371 | 2445 | 5.50 |
| 5 | 400 | 50 | 1830 | 1103 | 1.60 | 84 | 91 | 93 | 10190 | 0 | 6000 | 0.00 |
| 6 | 400 | 50 | 1830 | 1669 | 2.42 | 78 | 84 | 90 | 8170 | 421 | 4810 | 1.69 |
| 7 | 400 | 50 | 1830 | 1822 | 2.64 | 77 | 83 | 89 | 5600 | 762 | 3295 | 3.06 |
| 8 | 400 | 50 | 1830 | 1692 | 2.45 | 80 | 85 | 91 | 3425 | 936 | 2015 | 3.76 |
| 9 | 400 | 50 | 1470 | 572 | 0.83 | 79 | 86 | 87 | 8185 | 0 | 4820 | 0.00 |
| 10 | 400 | 50 | 1470 | 865 | 1.25 | 72 | 78 | 84 | 6565 | 272 | 3865 | 1.09 |
| 11 | 400 | 50 | 1470 | 944 | 1.37 | 72 | 77 | 84 | 4500 | 491 | 2650 | 1.97 |
| 12 | 400 | 50 | 1470 | 877 | 1.27 | 74 | 80 | 86 | 2750 | 604 | 1620 | 2.42 |
| 13 | 400 | 50 | 1110 | 246 | 0.36 | 72 | 79 | 80 | 6180 | 0 | 3640 | 0.00 |
| 14 | 400 | 50 | 1110 | 372 | 0.54 | 65 | 71 | 77 | 4955 | 155 | 2920 | 0.62 |
| 15 | 400 | 50 | 1110 | 407 | 0.59 | 65 | 70 | 77 | 3395 | 280 | 2000 | 1.12 |
| 16 | 400 | 50 | 1110 | 378 | 0.55 | 67 | 73 | 79 | 2080 | 344 | 1225 | 1.38 |

U = Power supply · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
 LwA_{out} = Sound power level outlet side · q_v = Air flow · P_{fs} = Pressure increase

