

EC centrifugal fan

backward curved, single inlet

R3G630-AA12-13 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	R3G630-AA12-13	
Motor	M3G150-FF	
Phase		3~
Nominal voltage	VAC	200
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Type of data definition		ml
State		prelim.
Speed	min ⁻¹	1000
Power input	W	1700
Current draw	A	5.3
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60


ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations



Technical features

Mass	24.2 kg
Size	630 mm
Surface of rotor	Coated in black
Material of electronics housing	Die-cast aluminium
Material of impeller	Aluminium sheet
Number of blades	6
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"F"
Humidity class	F4-1
Max. permissible ambient motor temp. (transp./ storage)	+80 °C
Min. permissible ambient motor temp. (transp./storage)	-40 °C
Mounting position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensate discharge holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 10 mA - Output 20 VDC, max. 50 mA - Output for slave 0-10 V - Input for sensor 0-10 V or 4-20 mA - Alarm relay - Integrated PID controller - Motor current limit - PFC, passive - RS485 ebmBUS - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Over-temperature protected electronics / motor - Line undervoltage / phase failure detection
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Electrical leads	Via terminal box
Motor protection	Reverse polarity and locked-rotor protection
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 61800-5-1; CE
Approval	CSA C22.2 Nr.77; GOST; UL 2111

Product drawing

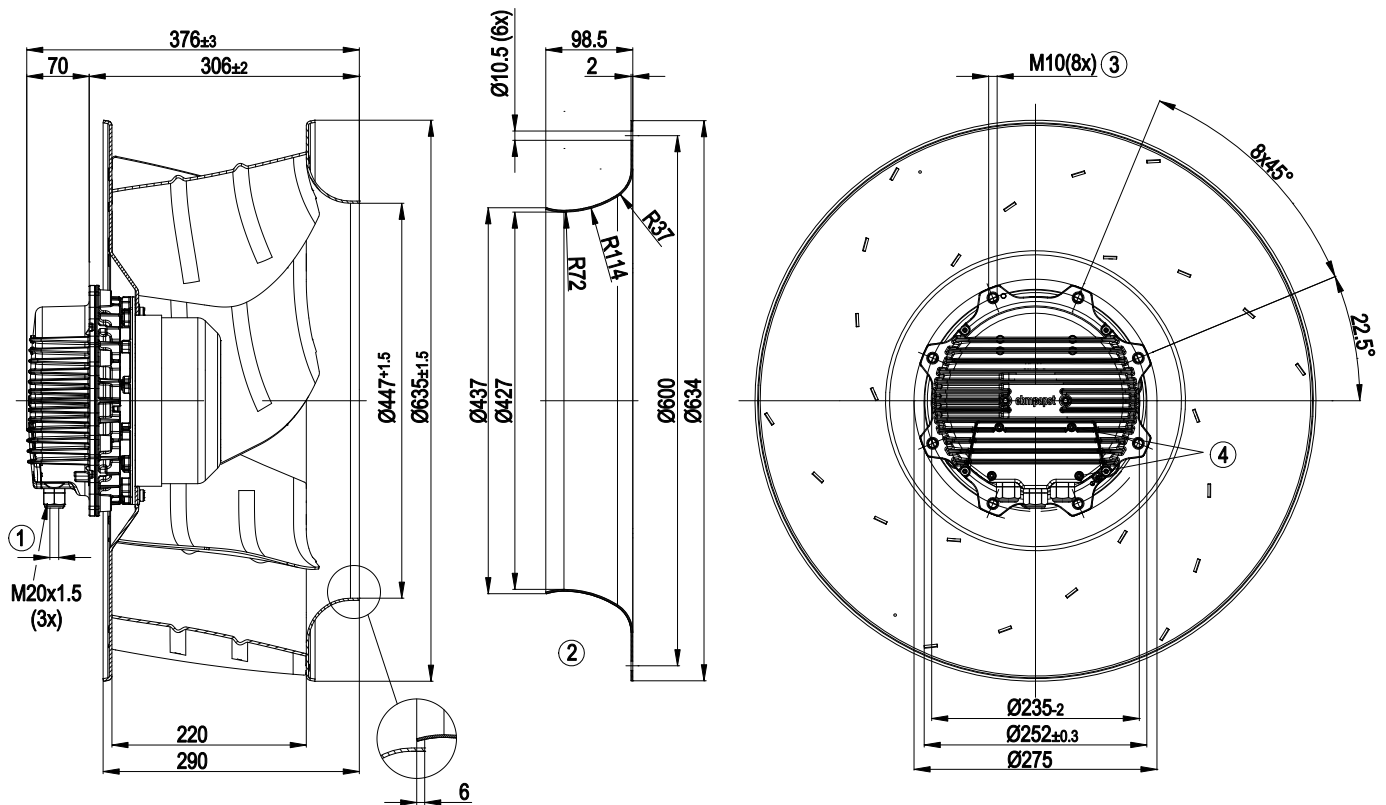


- | | |
|---|--|
| 1 | Cable diameter: min. 4 mm, max. 10 mm, tightening torque: 4±0.6 Nm |
| 2 | Accessory part: inlet nozzle 63070-2-4013 not included in the standard scope of delivery; other inlet nozzles on request |
| 3 | Depth of screw max. 25 mm |
| 4 | Tightening torque 3.5±0.5 Nm |


Connection screen

Customer circuit


Full speed





Speed setting



Setting of values, e.g. via pressure




Speed setting via potentiometer

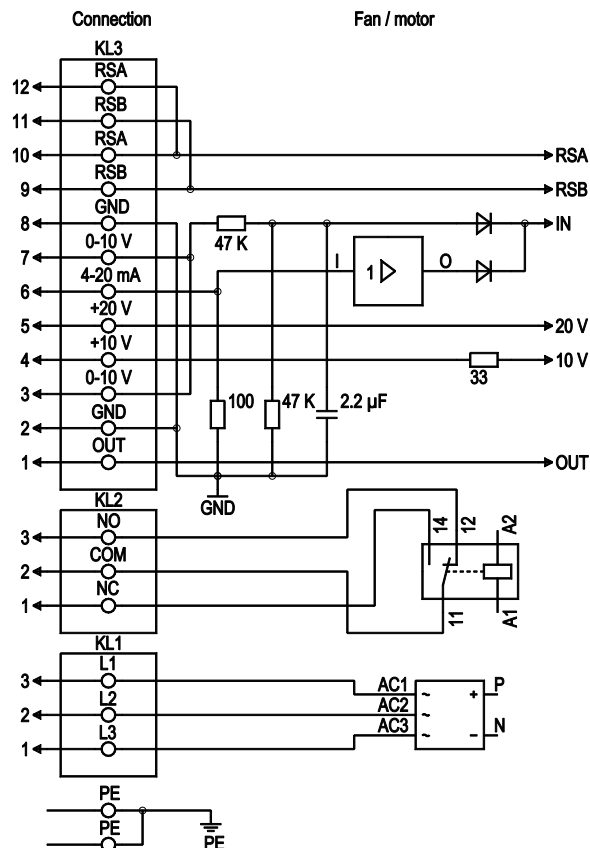

No.	Pin	Signal	Function / assignment
PE		PE	Protective earth connection
KL1	1, 2, 3	L1, L2, L3	Supply voltage, 50/60 Hz
KL2	1	NC	Floating status message contact, normally closed connection
KL2	2	COM	Floating status message contact, changeover contact, common connection (2 A, max. 250 VAC, min. 10 mA, AC1)
KL2	3	NO	Floating status message contact, normally open connection
KL3	1	OUT	Analog output, 0-10 VDC, max. 3 mA, SELV, output of the current level control coefficient: 1 V equates to 10 % level control coefficient. 10 V equate to 100 % level control coefficient.
KL3	2, 8	GND	Reference mass for control interface, SELV
KL3	3, 7	0-10 V	Use control / actual value input 0-10 VDC, impedance 100 kΩ only as alternative to 4-20 mA input, SELV
KL3	4	+10 V	Voltage output 10 VDC (+/-3 %), max. 10 mA, supply voltage for ext. devices (e.g. potentiometers), SELV
KL3	5	+20 V	Voltage output 20 VDC (+25 %/-10 %), max. 50 mA, supply voltage for ext. devices (e.g. sensors), SELV
KL3	6	4-20 mA	Use control / actual value input 4-20 mA, impedance 100 Ω, only as alternative to 0-10 V input, SELV
KL3	9, 11	RSB	RS485 interface for ebmBus, RSB, SELV
KL3	10, 12	RSA	RS485 interface for ebmBus, RSA, SELV

Charts: Air flow 50 Hz

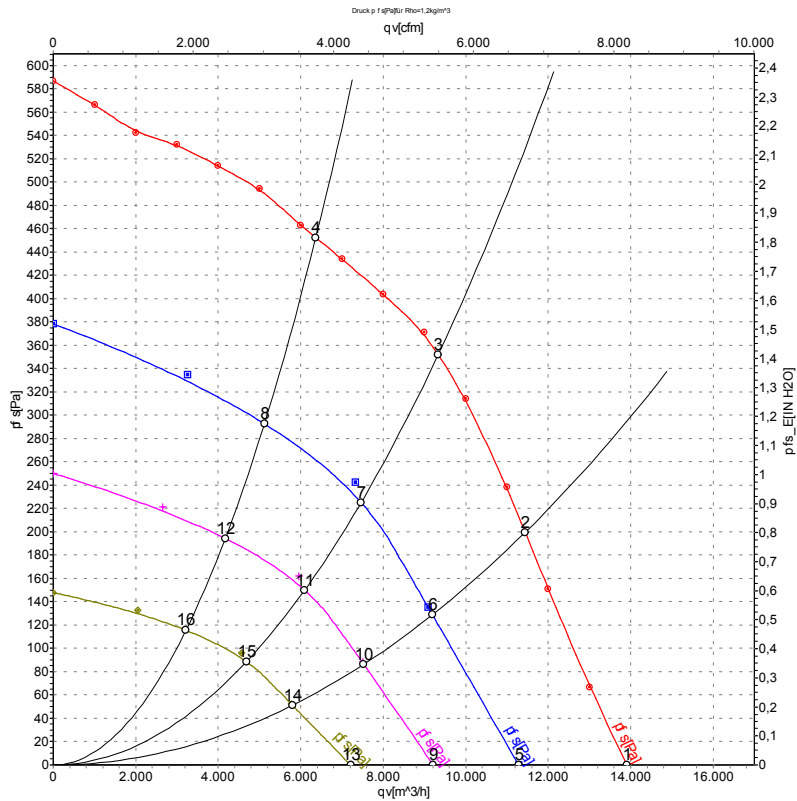

Measurement: LU-109100
 Measurement: LU-119157
 Measurement: LU-119158
 Measurement: LU-119159

Air performance measured as per ISO 5801
 Installation category A. For detailed
 information on the measuring set-up, please
 contact ebm-papst. Suction-side noise
 levels: LwA measured as per ISO 13347 /
 LpA measured with 1m distance to fan axis.
 The values given are valid under the
 measuring conditions mentioned above and
 may vary according to the actual installation
 situation. With any deviation from the
 standard set-up, the specific values have to
 be checked and reviewed with the unit
 installed.

Measured values

	Conn.	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	LwA _{out}	qv	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m³/h	Pa
1	Y	200	50	1000	1141	3.48	73	80	85	13910	0
2	Y	200	50	1000	1474	4.44	69	76	82	11440	200
3	Y	200	50	1000	1700	5.30	68	75	81	9335	352
4	Y	200	50	1000	1533	4.64	68	76	82	6365	452
5	Y	200	50	800	529	1.68	67	74	79	11280	0
6	Y	200	50	800	706	2.20	63	70	76	9195	129
7	Y	200	50	800	794	2.48	62	69	75	7465	234
8	Y	200	50	800	701	2.20	62	70	76	5120	293
9	Y	200	50	650	302	1.12	61	68	73	9215	0
10	Y	200	50	650	378	1.32	57	64	70	7525	88
11	Y	200	50	650	422	1.40	56	64	70	6095	156
12	Y	200	50	650	374	1.28	57	64	70	4170	194
13	Y	200	50	500	139	0.58	53	61	66	7210	0
14	Y	200	50	500	178	0.72	50	57	63	5800	51
15	Y	200	50	500	196	0.78	50	57	63	4680	92
16	Y	200	50	500	175	0.72	50	57	63	3215	116

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed · P_{ed} = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side
 LwA_{out} = Sound power level outlet side · qv = Air flow · p_{fs} = Pressure increase