

EC centrifugal fan

backward curved, single inlet



R3G630-AC05-10 ebmpapst Datasheet
sales@fansco.com
www.fansco.com



Nominal data

Type	R3G630-AC05-10	
Motor	M3G150-NA	
Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Type of data definition		ml
Speed	min ⁻¹	1370
Power input	W	4000
Current draw	A	6.2
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	50

ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations

Data according to ErP directive

Installation category	A
Efficiency category	Static
Variable speed drive	Yes
Specific ratio*	1.01

* Specific ratio = 1 + p_{fs} / 100 000 Pa

	Actual	Request 2013	Request 2015
Overall efficiency η_{es}	57.9	53.9	57.9
Efficiency grade N	62	58	62
Power input P _{ed}	kW	4.03	
Air flow q _v	m ³ /h	11520	
Pressure increase p _{fs}	Pa	681	
Speed n	min ⁻¹	1380	


Data established at point of optimum efficiency



Technical features


Mass	38.8 kg
Size	630 mm
Surface of rotor	Coated in black
Material of electronics housing	Die-cast aluminium
Material of impeller	Sheet aluminium, laser-welded
Number of blades	6
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"F"
Humidity class	F4-1
Max. permissible ambient motor temp. (transp./ storage)	+80 °C
Min. permissible ambient motor temp. (transp./storage)	-40 °C
Mounting position	Shaft horizontal or rotor on bottom
Condensate discharge holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 10 mA - Output 20 VDC, max. 50 mA - Output for slave 0-10 V - Input for sensor 0-10 V or 4-20 mA - Alarm relay - Integrated PID controller - Motor current limit - PFC, passive - RS485 ebmBUS - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Over-temperature protected electronics / motor - Line undervoltage / phase failure detection
EMC interference immunity	Acc. to EN 61000-6-2
EMC interference emission	Acc. to EN 61000-6-3
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Electrical leads	Via terminal box
Motor protection	Reverse polarity and locked-rotor protection
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 61800-5-1; CE
Approval	UL 1004-1; CSA C22.2 Nr.100

Product drawing

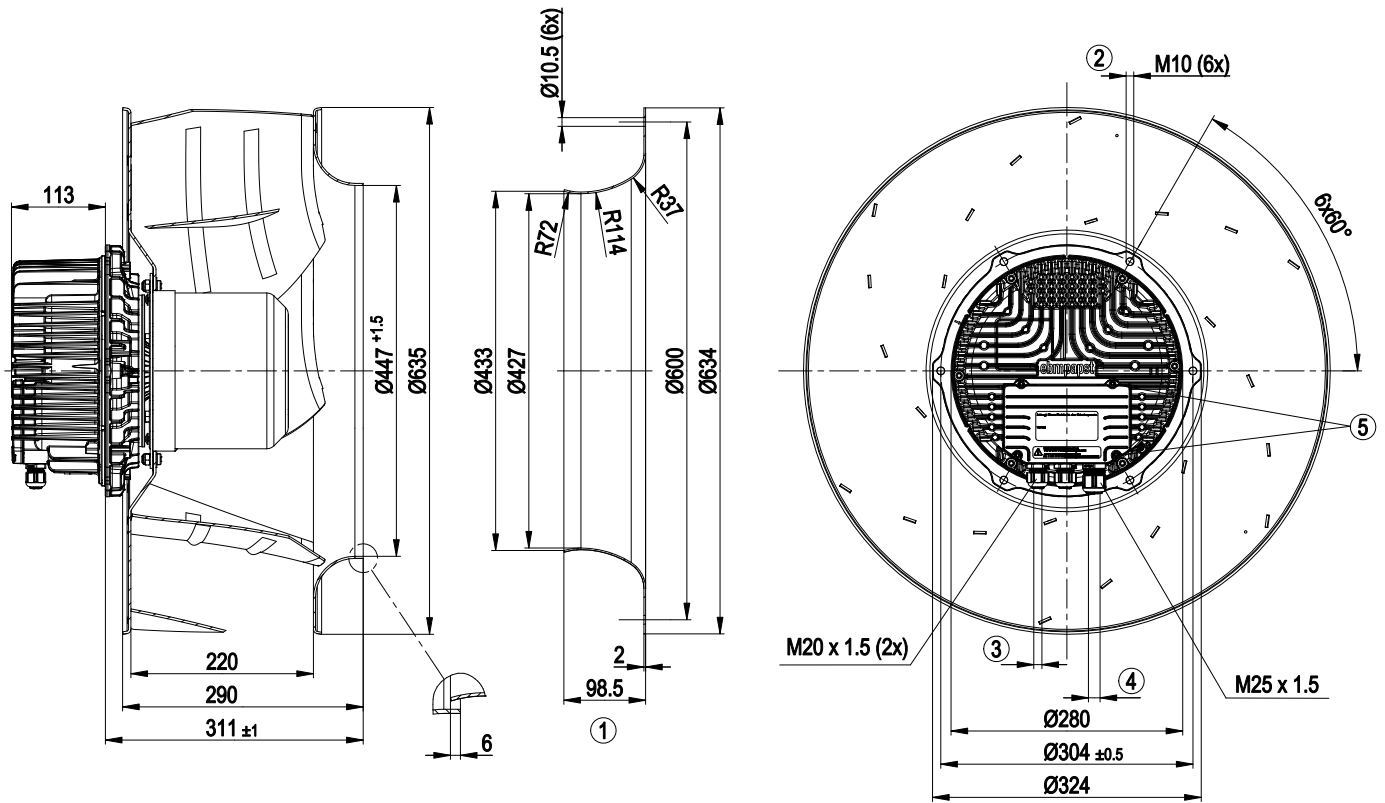


1	Accessory part: Inlet nozzle 63070-2-4013 not included in the standard scope of delivery, other inlet nozzles on request
2	Depth of screw max. 20 mm
3	Cable diameter: min. 4 mm, max. 10 mm, tightening torque: 4 ± 0.3 Nm
4	Cable diameter: min. 9 mm, max. 16 mm, tightening torque: 6 ± 0.3 Nm
5	Tightening torque 3.5 ± 0.5 Nm

Connection screen

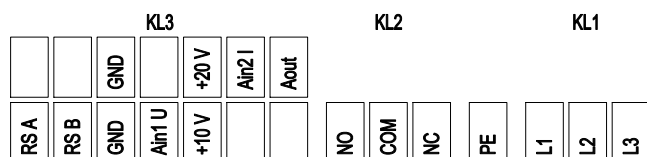

No.	Pin	Signal	Function / assignment
PE		PE	Ground wire
KL1		L3	Power line, L3
KL1		L2	Power line, L2
KL1		L1	Power line, L1
KL2		NC	Alarm relay, normally closed connection
KL2		COM	Alarm relay, COMMON (2 A, 250 VAC, AC1)
KL2		NO	Alarm relay, normally open connection
KL3		+10 V	Supply for external potentiometer, 10 VDC(+/-3 %) max. 10 mA
KL3		Ain1U	Analogue set value input, 0-10 V (impedance 100 kΩ), can be used as an alternative to connection Ain2 I only
KL3		GND	GND
KL3		RSB	RS485 interface for ebmBus, RS B
KL3		RSA	RS485 interface for ebmBus, RS A
KL3		Aout	Analog output 0-10 V max. 5 mA, output of the current level control coefficient
KL3		Ain2 I	Analogue actual value input, 4-20 mA (impedance 100 Ω), can be used only as an alternative to connection Ain1 U only
KL3		+20 V	Supply for external sensor, 20 VDC (+25 %/-10 %) max. 40 mA
KL3		GND	GND

Charts: Air flow 50 Hz

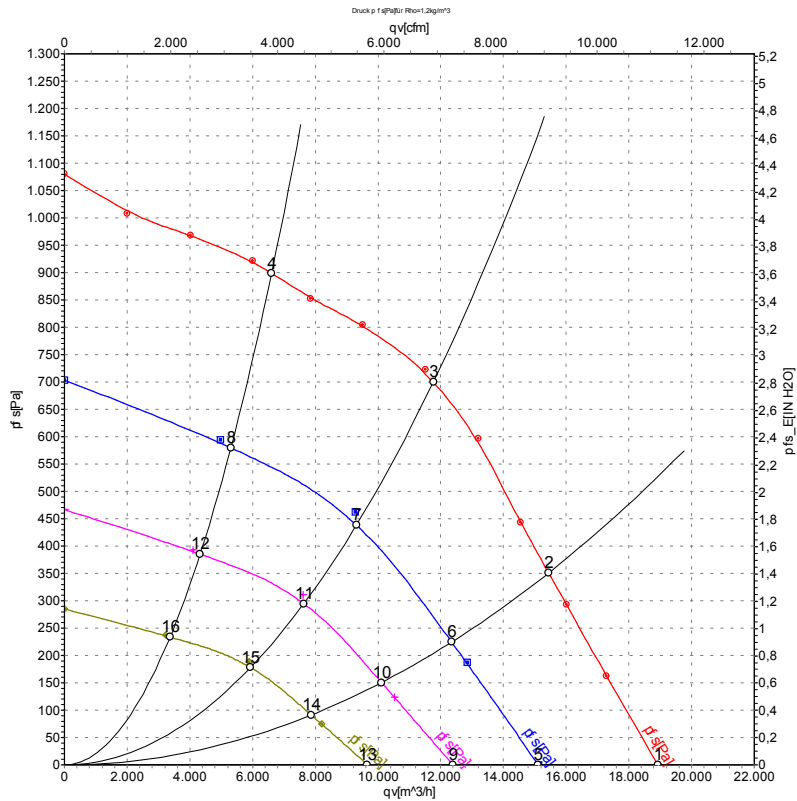

Measurement: LU-112140
 Measurement: LU-114038
 Measurement: LU-114039
 Measurement: LU-114040

Air performance measured as per ISO 5801
 Installation category A. For detailed
 information on the measuring set-up, please
 contact ebm-papst. Suction-side noise
 levels: L_{wA} measured as per ISO 13347 /
 L_{pA} measured with 1m distance to fan axis.
 The values given are valid under the
 measuring conditions mentioned above and
 may vary according to the actual installation
 situation. With any deviation from the
 standard set-up, the specific values have to
 be checked and reviewed with the unit
 installed.

Measured values

	Conn.	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	LwA _{out}	qv	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m³/h	Pa
1	Y	400	50	1370	2975	4.57	83	90	95	18920	0
2	Y	400	50	1370	3591	5.50	78	86	92	15440	350
3	Y	400	50	1370	4000	6.20	75	83	90	11760	700
4	Y	400	50	1370	3345	5.13	77	85	91	6605	900
5	Y	400	50	1100	1432	2.29	75	82	88	15110	0
6	Y	400	50	1100	1712	2.68	72	79	85	12350	226
7	Y	400	50	1100	1930	3.00	69	77	83	9310	460
8	Y	400	50	1100	1591	2.50	71	79	85	5305	585
9	Y	400	50	900	791	1.36	69	76	82	12380	0
10	Y	400	50	900	954	1.58	66	73	79	10110	151
11	Y	400	50	900	1080	1.75	64	72	78	7635	311
12	Y	400	50	900	891	1.49	65	73	79	4325	388
13	Y	400	50	700	402	0.80	62	69	75	9660	0
14	Y	400	50	700	464	0.90	59	67	72	7870	92
15	Y	400	50	700	516	0.99	57	65	72	5930	187
16	Y	400	50	700	438	0.85	58	66	73	3370	235

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed · P_{ed} = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side
 LwA_{out} = Sound power level outlet side · qv = Air flow · p_{fs} = Pressure increase