

R6D560-AH05-05 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

## Nominal data

|                             |                    |     |      |      |
|-----------------------------|--------------------|-----|------|------|
| Type                        | R6D560-AH05-05     |     |      |      |
| Motor                       | M6D110-IA          |     |      |      |
| Phase                       |                    | 3~  | 3~   | 3~   |
| Nominal voltage             | VAC                | 230 | 400  | 415  |
| Wiring                      |                    | Δ   | Y    | Y    |
| Frequency                   | Hz                 | 50  | 50   | 50   |
| Method of obtaining data    |                    | ml  | ml   | ml   |
| Valid for approval/standard |                    | -   | -    | -    |
| Speed (rpm)                 | min <sup>-1</sup>  | 890 | 890  | 900  |
| Power consumption           | W                  | 780 | 780  | 800  |
| Current draw                | A                  | 2.9 | 1.68 | 1.72 |
| Min. back pressure          | Pa                 | 0   | 0    | 0    |
| Min. back pressure          | inH <sub>2</sub> O | 0   | 0    | 0    |
| Min. ambient temperature    | °C                 | -40 | -40  | -40  |
| Max. ambient temperature    | °C                 | 60  | 60   | 55   |
| Starting current            | A                  | 9.4 | 5.4  | 5.1  |


ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change



## Technical description


|                                                                            |                                                        |
|----------------------------------------------------------------------------|--------------------------------------------------------|
| Weight                                                                     | 16.5 kg                                                |
| Fan size                                                                   | 560 mm                                                 |
| Rotor surface                                                              | Cast in aluminum                                       |
| Impeller material                                                          | Sheet aluminum                                         |
| Number of blades                                                           | 9                                                      |
| Direction of rotation                                                      | Clockwise, viewed toward rotor                         |
| Degree of protection                                                       | IP54                                                   |
| Insulation class                                                           | "F"                                                    |
| Moisture (F) / Environmental (H) protection class                          | F3-1                                                   |
| Max. permitted ambient temp. for motor (transport/storage)                 | +80 °C                                                 |
| Min. permitted ambient temp. for motor (transport/storage)                 | -40 °C                                                 |
| Installation position                                                      | Any                                                    |
| Condensation drainage holes                                                | None                                                   |
| Mode                                                                       | S1                                                     |
| Motor bearing                                                              | Ball bearing                                           |
| Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system) | <= 3.5 mA                                              |
| Motor protection                                                           | Thermal overload protector (TOP) with basic insulation |
| Protection class                                                           | I (with customer connection of protective earth)       |
| Conformity with standards                                                  | EN 61800-5-1                                           |
| Approval                                                                   | CCC; CSA C22.2 No. 100; EAC; UL 1004-1; VDE            |

## Product drawing

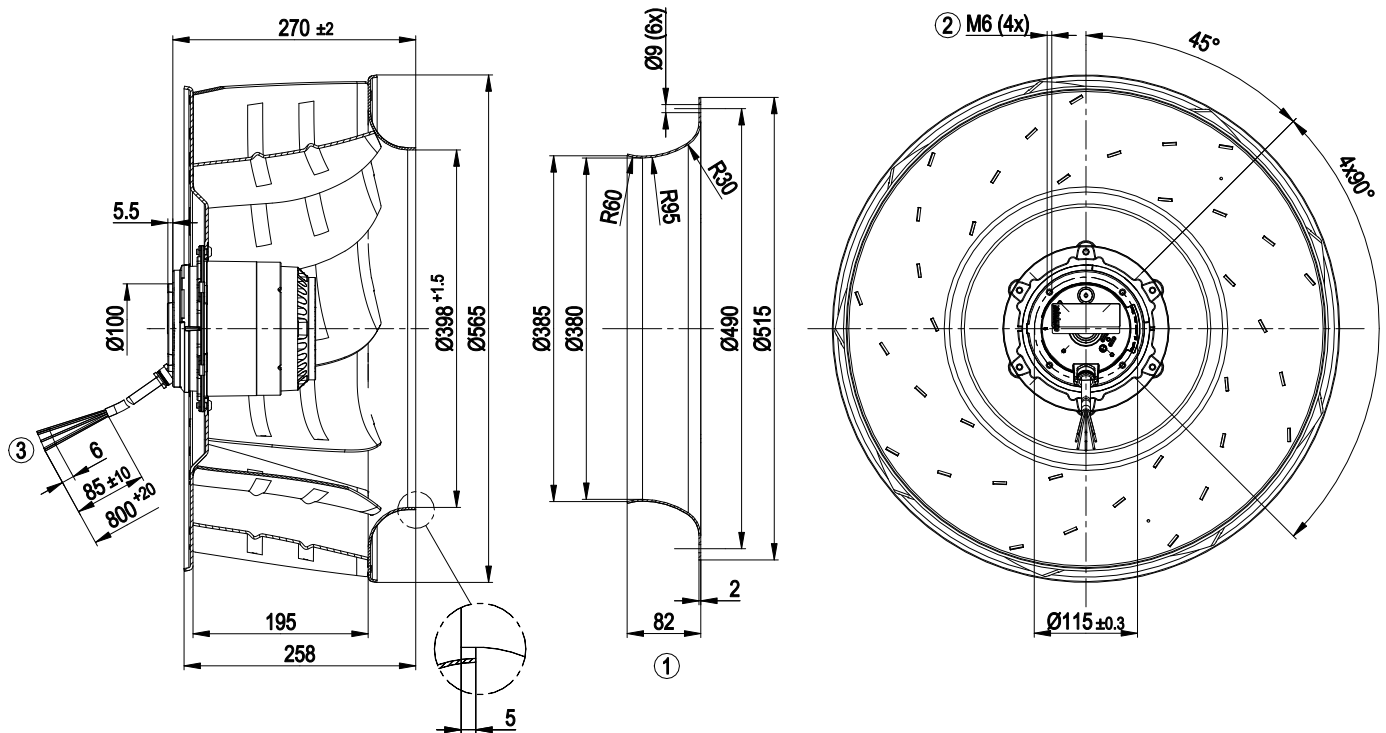

- |   |                                                                           |
|---|---------------------------------------------------------------------------|
| 1 | Accessory part: inlet ring 63071-2-4013 not included in scope of delivery |
| 2 | Max. clearance for screw 12 mm                                            |
| 3 | Cable silicone 9G 0.75 mm <sup>2</sup> , 9x crimped splices               |

Connection diagram

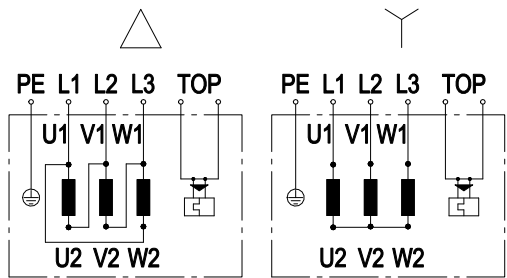

Note: Change of rotation direction by reversing two phases


|    |                  |    |                 |     |         |
|----|------------------|----|-----------------|-----|---------|
| Δ  | Delta connection | Y  | Star connection | L1  | black   |
| L2 | blue             | L3 | brown           | U1  | black   |
| V1 | blue             | W1 | brown           | U2  | green   |
| V2 | white            | W2 | yellow          | TOP | 2x gray |
| PE | green/yellow     |    |                 |     |         |



# AC centrifugal fan

backward-curved, single-intake

## Curves: Air performance 50 Hz

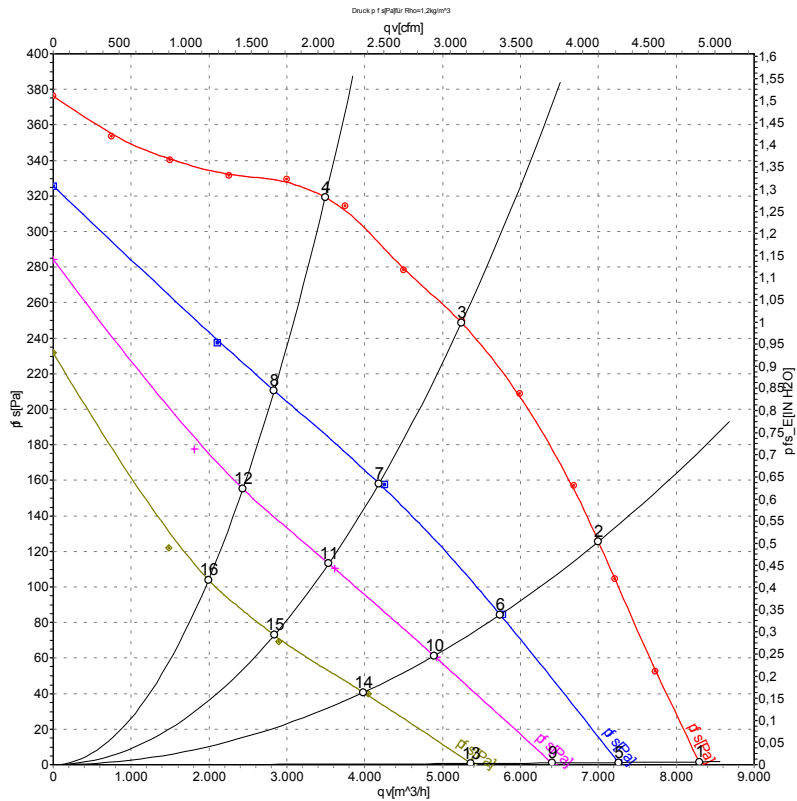

Measurement: LU-104086-1  
Measurement: LU-105563-1  
Measurement: LU-105564-1  
Measurement: LU-105550-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

|    | Wired | U   | f  | n                 | P <sub>e</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | LwA <sub>out</sub> | qv   | p <sub>fs</sub> | qv   | p <sub>fs</sub>    |
|----|-------|-----|----|-------------------|----------------|------|-------------------|-------------------|--------------------|------|-----------------|------|--------------------|
|    |       | V   | Hz | min <sup>-1</sup> | W              | A    | dB(A)             | dB(A)             | dB(A)              | m³/h | Pa              | CFM  | inH <sub>2</sub> O |
| 1  | Y     | 400 | 50 | 930               | 557            | 1.46 | 68                | 75                | 80                 | 8310 | 0               | 4890 | 0.00               |
| 2  | Y     | 400 | 50 | 905               | 699            | 1.59 | 63                | 71                | 76                 | 7000 | 125             | 4120 | 0.50               |
| 3  | Y     | 400 | 50 | 890               | 780            | 1.68 | 61                | 69                | 74                 | 5240 | 250             | 3085 | 1.00               |
| 4  | Y     | 400 | 50 | 900               | 718            | 1.59 | 62                | 69                | 75                 | 3495 | 320             | 2055 | 1.28               |
| 5  | Y     | 230 | 50 | 805               | 404            | 1.29 | 63                | 71                | 75                 | 7255 | 0               | 4270 | 0.00               |
| 6  | Y     | 230 | 50 | 735               | 475            | 1.48 | 57                | 65                | 71                 | 5740 | 86              | 3380 | 0.35               |
| 7  | Y     | 230 | 50 | 705               | 507            | 1.58 | 54                | 63                | 68                 | 4180 | 160             | 2460 | 0.64               |
| 8  | Y     | 230 | 50 | 745               | 462            | 1.45 | 57                | 66                | 71                 | 2835 | 210             | 1670 | 0.84               |
| 9  | Y     | 180 | 50 | 705               | 319            | 1.29 | 60                | 67                | 72                 | 6405 | 0               | 3770 | 0.00               |
| 10 | Y     | 180 | 50 | 620               | 352            | 1.42 | 52                | 60                | 66                 | 4890 | 62              | 2880 | 0.25               |
| 11 | Y     | 180 | 50 | 590               | 365            | 1.47 | 50                | 58                | 64                 | 3535 | 113             | 2080 | 0.45               |
| 12 | Y     | 180 | 50 | 635               | 345            | 1.39 | 53                | 61                | 67                 | 2435 | 154             | 1435 | 0.62               |
| 13 | Y     | 140 | 50 | 585               | 227            | 1.19 | 53                | 61                | 67                 | 5365 | 0               | 3155 | 0.00               |
| 14 | Y     | 140 | 50 | 500               | 238            | 1.25 | 46                | 55                | 61                 | 3985 | 41              | 2345 | 0.16               |
| 15 | Y     | 140 | 50 | 470               | 243            | 1.29 | 44                | 53                | 58                 | 2840 | 71              | 1670 | 0.29               |
| 16 | Y     | 140 | 50 | 515               | 237            | 1.24 | 47                | 55                | 61                 | 1995 | 103             | 1175 | 0.41               |

Wired = Wiring · U = Power supply · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
LwA<sub>out</sub> = Sound power level outlet side · qv = Air flow · p<sub>fs</sub> = Pressure increase

